



CLEARED

FORM PTO-1390 (Modified)
(REV 11-98)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

1200.448

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/744733

INTERNATIONAL APPLICATION NO.
PCT/FR99/01863INTERNATIONAL FILING DATE
28 July 1999PRIORITY DATE CLAIMED
28 July 1998

TITLE OF INVENTION

FRICION CLUTCH BEARING AN ELECTRIC MACHINE ROTOR, IN PARTICULAR
FOR A MOTOR VEHICLE

APPLICANT(S) FOR DO/EO/US

HUART, David; GRATON, Michel; PLASSE, Cedric; ABADIA, Roger; TAUVRON, Fabrice; FAVEROLLE, Pierre;
AKEMAKOU, Antoine; LEBAS, Gilles

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
- ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
- ☒ A copy of the International Search Report (PCT/ISA/210).
- ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
- ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
- ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
- ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
- ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 13 to 20 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☐ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ Certificate of Mailing by Express Mail
20. ☐ Other items or information:

Form PTO-1449, 4 Cited References, Form PCT/RO 125

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.492(a)(1) - (5)) : 09/744733	INTERNATIONAL APPLICATION NO. PCT/FR99/01863	ATTORNEY'S DOCKET NUMBER 1200.448
---	--	---

21. The following fees are submitted:

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :

- ☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO **\$970.00**
- ☒ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO **\$840.00**
- ☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO **\$690.00**
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) **\$670.00**
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) **\$96.00**

ENTER APPROPRIATE BASIC FEE AMOUNT =

CALCULATIONS PTO USE ONLY

\$840.00

Surcharge of **\$130.00** for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).

\$0.00

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	45 - 20 =	25	x \$18.00	\$450.00	
Independent claims	1 - 3 =	0	x \$78.00	\$0.00	
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>				\$0.00	

TOTAL OF ABOVE CALCULATIONS = \$1,290.00

Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). ☐

\$0.00

SUBTOTAL = \$1,290.00

Processing fee of **\$130.00** for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).

\$0.00

TOTAL NATIONAL FEE = \$1,290.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). ☒

\$40.00

TOTAL FEES ENCLOSED = \$1,330.00

Amount to be: refunded	\$
charged	\$

☒ A check in the amount of **\$1,330.00** to cover the above fees is enclosed.

☐ Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees.
A duplicate copy of this sheet is enclosed.

☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **50-0548** A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Liniak, Berenato, Longacre & White
6550 Rock Spring Drive
Suite 240
Bethesda, MD 20817
(301)896-0600


SIGNATURE

Matthew W. Stavish

NAME

36,286

REGISTRATION NUMBER

January 29, 2001

DATE

09/744733

JC62 Rec'd PCT/PTO 29 JAN 2001

33/p-1s

I, Eur Ing James Francis Bradley BSc CEng MIEE MIL,
translator to Engineering Translations, of "Hollyhocks",
Cherry Tree Road, Farnham Royal, Buckinghamshire,
England, hereby declare that I am conversant with the
French and English languages and am a competent
translator thereof. I declare further that to the best of
my knowledge and belief the following is a true and
correct translation of the accompanying International
Patent Application No. PCT/FR99/01863 in the French
language.

Signed this 17th day of January 2001



J. F. BRADLEY

For and on behalf of Engineering Translations

09/744733

JC02 Rec'd PCT/PTO 29 JAN 2001

Friction clutch carrying the rotor of an electric machine, especially for a motor vehicle.

5 The invention relates to a friction-clutch device equipped with a rotational-drive flywheel.

The object of the invention is, more particularly, in a motor vehicle, to allow automatic stopping and restarting of the internal-combustion engine when the vehicle is at rest for a short period - vehicle
10 waiting at red lights, for example - so as to save fuel.

Such a clutch device is known because of the document FR-A-2 604 229. In this document, the clutch device is made up essentially of a conventional friction
15 clutch and of an auxiliary clutch with electromagnetic coupling, arranged between an element integral in rotation with the reaction plate of the friction clutch and an inertial flywheel mounted rotating coaxially with the drive shaft, by means of a ball bearing
20 mounted on an axial spacer interposed between the crankshaft of the engine of the vehicle and the reaction plate. Referring to Figure 1 of this document, it is seen that this clutch device is axially bulky especially because of the belt driven by an electric motor
25 spaced away radially from the friction clutch in such a way that the device is also bulky radially. Moreover, the electromagnetic clutch relies on a plate integral in rotation with the reaction plate while being movable axially with respect to it.

30 Hence the object of the present invention is to reduce the axial and radial bulk of the clutch device while dispensing with the presence of a plate-type electromagnetic clutch.

According to the invention, a clutch device as
35 indicated above including, on the one hand, a drive flywheel featuring at [sic] a front extremity for fixing it to a drive shaft, and a rear extremity in the

form of a hollow-shaped reaction plate with a central recess delimited externally by a friction face, and, on the other hand, a friction disc comprising at least one friction lining for contact with the friction face of the reaction plate, the said lining being integral with a support coupled elastically, by way of a torsion damper, to a central hub intended to be integrated in rotation with a driven shaft and [sic] characterised in that the torsion damper penetrates into the central recess of the reaction plate and in that the drive flywheel, between its front and rear extremities, carries the rotor of a rotating electric machine comprising a fixed stator coaxial with the rotor.

By virtue of the invention, the radial bulk of the electric-machine/friction-clutch assembly is reduced, since the electric machine is adjacent to the reaction plate and is partly carried by the drive flywheel.

By virtue of the invention, the electric machine is adjacent to the engine block while the reaction plate and the rest of the clutch are accommodated in the usual way within the clutch bell housing. This arrangement makes it possible to modify the engine block and the clutch bell housing of a conventional motor vehicle as little as possible while having a reduced radial bulk due to the fact that the electric machine is offset axially with respect to the friction disc. The rest of the clutch, especially the clutch mechanism, remains unchanged.

The input shaft of the gearbox may be unchanged with respect to that of a conventional vehicle.

In a variant, this shaft may be elongated so as to be centred by means of the crankshaft.

By virtue of the invention, the drive flywheel carries the rotor of an electric machine which makes it possible to dispense with the presence of a plate-type electromagnetic clutch, and the axial and radial bulk

are reduced especially because of the absence of a transmission belt. . .

The electric machine is configured to form a starter for the internal-combustion engine as well as
5 an alternator.

The drive flywheel, called motor flywheel, features very high inertia. The internal-combustion engine, or heat engine, of the vehicle can be cut off at red lights, for example. The flywheel, and thus the
10 heat engine, can easily and rapidly be restarted by the electric machine then playing the role of a starter. It is thus possible to save fuel. Thus the electric machine forms an alternator/starter. It also makes it possible to filter the vibration and to avoid stalling
15 of the heat engine by operating as an electric motor.

For further details on such a machine, refer to the document WO 98/05882.

In one embodiment, the support of the friction lining is coupled elastically to the hub by means of a
20 torsion damper which includes a first guide washer integral with the support and of a second guide washer.

A web linked in rotation, after taking up any play, is interposed between the two guide washers. The second guide washer is installed in the central recess
25 of the reaction plate.

The support may be separate from the first guide washer, being secured to it, for example, by distance rods linking the two guide washers together in such a way that the support is placed next to the first guide
30 washer.

In a variant, the support is in a single piece with the first guide washer.

In one embodiment, the declutching device of the clutch is of the concentric type in order to reduce the
35 axial bulk between the clutch and the bottom of a bell housing surrounding the friction clutch.

Advantageously, additional bearing means are interposed between the engine flywheel and a carrier

piece integral with the spacer fixedly carrying the stator. This results in the possibility of guaranteeing a precise and small gap between the stator and the rotor.

5 These bearing means may consist of a smooth bearing or of a ball bearing with at least one row of balls. This ball bearing may be instrumented especially in order to measure the speed of rotation of the drive flywheel and thus of the crankshaft.

10 This carrier piece partly envelops the stator and the rotor and thus advantageously forms a shield avoiding any contamination in the electric machine. This piece is integral, or is affixed integrally onto the spacer.

15 The drive flywheel may be a single piece with the reaction plate, for reasons of cost.

 In a variant, the drive flywheel is in several pieces or parts and, in addition to the reaction plate, includes a tube or a pedestal or a shaft for fixing it
20 onto the drive shaft.

 Thus the two pieces of the flywheel may be of two different materials in order to adjust the inertia of the flywheel.

 Moreover, it is easily possible to balance the
25 flywheel dynamically, for example by removing material from the outer periphery of the reaction plate.

 Furthermore, the dust given off by the friction of at least one of the friction linings which the friction-clutch device includes does not risk contaminating
30 the electric machine since the machine is situated to the front of the reaction plate.

 The reaction plate preferably features a skirt at its outer periphery on which is fixed the cover of a friction clutch.

35 By virtue of this arrangement, no dust coming from the friction linings can soil the electric machine.

This result can also be achieved with the carrier piece when it is adjacent to the reaction plate and partly envelops the rotor and the stator.

This piece constitutes a thermal screen thus sheltering the electric machine.

It will be appreciated that the placing of the second guide washer, in a general way of the friction damper, in the recess of the reaction plate displaces the centre of gravity of the assembly consisting of the electric machine and the friction clutch towards the drive shaft and thus towards the electric machine. By virtue of this arrangement, bearing means can be mounted on the drive flywheel and carry the stator of the machine by way of a carrier piece. Thus, these bearing means will be close to the centre of gravity of the assembly and thus sheltered. The balancing of the assembly can be carried out easily by adding or removing material to the reaction plate very close to the centre of gravity.

It will be appreciated that the torsion damper may have the configuration desired for damping vibration. It may be thicker and, in addition to the web and the two guide washers, include auxiliary webs in order to increase the angular range of movement between the hub and the friction lining or linings.

The friction clutch may reach high temperatures in service, such that it is appropriate to provide cooling means in order to protect the friction-clutch device as a whole and thus to increase its lifetime.

Advantageously, therefore, the engine flywheel carries means for cooling the electric machine such as fins carried by the reaction plate.

In another embodiment, cooling means are provided in order to cool the stator of the electric machine in order to enhance the lifetime and the performance thereof. It is thus possible to cool the stator directly using piercings formed in it.

Advantageously, the piercings are formed in a single-piece spacer/stator assembly which makes it possible to preserve the mechanical strength of the stator.

5 Thus, in a variant, the spacer is in a single piece with the stator and the assembly [lacuna] composed of two series of packs of metal plates, one of which forms a spacer.

10 In a variant, the stator can be cooled by means of external spacer [sic].

15 Needless to say, these various cooling means can be combined together, for example, a cooling fluid in one embodiment passes through piercings formed in the metal plates of the stator in order to penetrate into a cooling chamber formed in the thickness of the spacer in combination with fins carried by the engine fly-wheel.

 Means for emptying the cooling chamber of the spacer are installed at its low point.

20 The said emptying means are preferably installed at the lowest point of the said chamber, thus making it possible to empty the complete cooling circuit of the internal-combustion engine of the vehicle.

25 In one embodiment, the carrier piece of the stator features recesses into which penetrate projections of the engine block in order to reduce the bulk.

30 The spacer, especially when it consists of two series of packs of metal plates, makes it possible to cool the electric machine by carrying an inlet and outlet duct allowing a flow of air within the electric machine, between the inlet and outlet duct.

 One of the ducts may be equipped with an electric-motor/turbine-disc assembly allowing forced air circulation.

35 The spacer does not need to be centred with respect to the engine block when this spacer is integral with a carrier piece serving to support the abovementioned bearing means. In this case, the clutch bell

0944724460

housing is centred by the spacer, for example, by means of a centring ring passing through the spacer and carried by the engine block.

It will be seen that it is possible to cool the electric machine without impinging on the clutch bell housing or the engine block, especially when the spacer carries an inlet and outlet duct.

The drive flywheel also makes it possible to add material easily and thus to balance the out-of-balance masses of the crankshaft, especially when the heat engine is of three-cylinder type.

The spacer thus makes it possible to perform a large number of supplementary functions. It is also possible to reduce the axial bulk by equipping the friction clutch with a wear-take-up mechanism.

The description which will follow illustrates the invention with regard to the attached drawings, in which:

- Figure 1 is a view in axial section of an electric-machine/friction-clutch assembly according to the invention.

- Figures 2 and 3 are views similar to Figure 1, for 2 other embodiment examples.

- Figures 4 to 6 are views similar to Figure 1 without the central part of the friction disc for respectively a fourth, a fifth and a sixth embodiment example.

- Figure 7 is a partial view of a device for cooling the stator.

- Figure 8 is a view similar to Figure 7 in another embodiment example.

- Figure 9 is a view in axial section of an engine flywheel similar to that of Figure 1 equipped with a removable mounting plate.

- Figure 10 is a diagrammatic half-view of the concentric-type declutching device equipped with a force sensor.

- Figure 11 is a view of the characteristic curve of the diaphragm brought down to the level of the declutching release bearing.

5 - Figure 12 is a view similar to Figure 6 in another embodiment example.

- Figure 13 is a sectional view similar to Figure 1, along the line C-C of Figure 14 for yet another embodiment example.

10 - Figure 14 is a sectional view along the line A-A of Figure 13.

- Figure 15 is a sectional view along the line B-B of Figure 14.

- Figures 16 and 17 are views similar to Figure 1 for two more embodiment examples.

15 - Figure 18 is a view in perspective of the electric-machine/clutch assembly without the rotor and the stator of the electric machine.

- Figure 19 is a view in perspective of the fly-wheel only of Figure 18.

20 - Figure 20 is a view in perspective, with local cutaway, showing the clutch mechanism of Figure 17.

- Figure 21 is a view in perspective of a single-piece spacer with the metal plates of the stator for yet another embodiment example.

25 - Figure 22 is a view along the arrow 22 of Figure 23 of the support flange alone.

- Figure 23 is a view similar to Figure 1 for yet another embodiment example.

30 - Figure 24 is a view in perspective of a fly-wheel only of the electric-machine/friction-clutch assembly, equipped with a coder wheel forming a target for detection means.

- Figure 25 is a view in perspective of the fly-wheel of Figure 24 equipped with its spacer.

35 - Figure 26 is a view similar to Figure 1 with fixing screws into the thickness behind the outer surface for fixing of the stator and of the rotor.

- Figure 27 is a view similar to Figure 1 with air inlets and outlets for ventilation.

- Figure 28 is a view similar to Figure 27 in another embodiment.

5 - Figure 29 is a view similar to Figure 27 in yet another embodiment.

- Figures 29, 30, 31, 32 and 33 are views in perspective of the air inlet and outlet ducts.

10 - Figure 34 is a sectional view along the line A-A of Figure 13 in another embodiment.

- Figure 35 is a view similar to Figure 27 in yet another embodiment.

- Figure 36 is a view similar to Figure 34 in yet another embodiment.

15 - Figure 37 is a view similar to Figure 23 in yet another embodiment.

- Figure 38 is a sectional view of a method of fixing the spacer.

20 In the figures, the common elements will be allocated the same reference numbers.

In these figures is represented an assembly 1 for cutting off and starting an internal-combustion engine.

25 This assembly 1 includes a rotating electric machine 2 and a friction clutch 3 including a reaction plate 4 made of mouldable material, here cast iron.

In a variant, the reaction plate is of aluminium-based mouldable material and features a coating for co-operating with a friction lining 16 described below.

30 The electric machine 2 includes a stator 5 and a rotor 6 mounted coaxially, and radially one on top of the other with a gap 7 formed between the stator 5 and the rotor 6.

35 In the figures, the stator 5 surrounds the rotor 6, but, needless to say, in a variant, the rotor 6 may surround the stator 5 equipped with windings of electrical wires the ends of which, called chignons, can be seen at 8.

According to one characteristic, the flywheel 13, usually called engine flywheel, carries the rotor 6

of the electric machine 2 between its front and rear extremities.

The flywheel 13/rotor 6/clutch 3 assembly constitutes a friction-clutch device; the flywheel 13 constituting the input element of the clutch 3 and the support of the rotor 6 of the electric machine 2.

The electric machine 2 here makes it possible to start the internal-combustion engine. To do that, it is necessary to pass through the coil of the stator a slaved electric current with frequency and current strength determined by electronic control by the computer receiving information on the starting condition of the vehicle. In this case, the electric machine 2 turns faster than a conventional starter.

The electric machine 2 also constitutes an alternator when the internal-combustion engine is turning. This machine, here of asynchronous type forming [sic] an electric motor. It may be of any type, namely, for example, of radial- or axial-flux type, asynchronous, synchronous with magnets in the gap or buried magnets, with flux commutation with magnets alone or hybrid magnets - de-excitation by a coil at the stator - with terminals and without brushes, variable reluctance, single and double excitation, transverse flux with Vernier effect. The machine makes it possible to filter the vibration generated by the said internal-combustion engine. In makes it possible to accelerate the heat engine and to prevent it stalling. It makes it possible to brake the engine and to deliver greater power than the conventional alternators.

The electric machine 2 also makes it possible to facilitate gear-changing by synchronising the shafts 11 and 12, the machine braking or accelerating the shaft 11.

According to another characteristic, the machine 2 makes it possible to stop the internal-combustion engine at red lights and then to start it again, saving fuel, due to the high inertia of the flywheel 13

equipped with the rotor 6. For example, with neutral engaged and ignition key in vehicle running position, the engine is cut off after two seconds and started up again as soon as the gear ratio is changed.

5 For further details on such a machine, refer to the document WO 98/05882.

Hence, on Figure 1, a toothed crown ring can be seen at 40, formed on the outer periphery of the reaction plate 4 and associated with a radial sensor, not
10 visible on all the figures, in order especially to pick up the rotational speed of the electric machine 2. Here, as regards an application for a motor vehicle, the drive shaft 11 is the crankshaft of the internal-combustion engine of the vehicle, while the driven
15 shaft 12 is the input shaft of the gearbox integral with a clutch bell housing 14, also called clutch casing, forming a fixed casing. The input shaft 12 passes through the back of the bell housing 14 surrounding, in large measure, the clutch 3 mounted so as to rotate
20 about an axis X-X aligned with that of the shafts 11 and 12. The rotor 6 is thicker than the reaction plate 4 forming, with the flywheel 13, the input element of the friction clutch, and thus of the friction-clutch device. The output element of this clutch consists of
25 at least one central hub 15 splined internally in order to be linked in rotation with the driven shaft 12 splined externally to do so at its extremity. The hub 15 is coupled rigidly or elastically with at least one friction lining 16 intended to be clamped between the
30 reaction plate 4 and a pressure plate 17 under the action of clutching means 18 with an axial action acting on the pressure plate 17 and bearing on a cover 19 integral with the reaction plate 4, here by being screwed on.

35 The friction lining 16 and the hub 15 belong respectively to the outer periphery and to the inner periphery of a friction disc 20 including at least one support 21 carrying the friction lining 16 and coupled

to the hub 15. The support 21 can be embedded in the lining 16.

Two friction linings 16 are preferably provided, being fixed on either side of the support 21, and axi-
5 ally elastic in the region of the linings 16 for progressive clamping of the linings 16 between the plates 4, 17, and in order to give assistance during disengaging of the clutch.

Such a support is described, for example, in the
10 document FR-A-2 693 778. The fixing of the linings 16 can therefore be achieved by riveting; in a variant, the linings are fixed by bonding onto the central bearing region of a tripod blade which makes it possible to reduce the thickness of the friction linings and thus
15 the axial bulk.

This also makes it possible to reduce the inertia of the disc 20 and to wear out the linings 16 further.

The friction faces of the lining or linings 16
20 are therefore normally clamped between the plates 4, 17 in such a way that the clutch is normally engaged. To disengage the clutch, it is therefore necessary to provide declutching means 22 in order deliberately to counteract the action of the clutching means 18 so as
25 to release the friction lining or linings 16 and disengage the clutch. These declutching means 22 are controlled by a declutching release bearing 23 acting in a thrust mode or by traction on the inner extremity of the declutching means 22. The release bearing belongs
30 to a declutching device 24.

The friction clutch 3 therefore includes a reaction plate 4, possibly in 2 parts for forming a damping flywheel or a flexible flywheel, which is keyed in rotation onto the crankshaft 11 and which, at its outer
35 periphery, supports a cover 19, here by screws, to which is attached, with axial mobility, at least one pressure plate 17; several plates 17 and several friction discs 20 possibly being provided as can be seen,

for example, in Figure 4 of the document FR A 1 280 746.

The pressure plate 17 is integral in rotation with the cover 19 and therefore with the reaction plate 4, while being able to move with respect to it by way of axially elastic lugs 25, here tangential, which can be seen better in the document FR A 1 280 746 and in Figure 18.

Clutching means 18 act between the back of the cover 19, here of hollow shape, and the pressure plate 17. These clutching means bear on the back of the cover 19 and on a bossing, not referenced, of the pressure plate, in order to clamp the friction linings 16 between the plates 4 and 17.

The declutching means 22 may consist of declutching levers associated with helical springs as described in the document FR A 1 280 746. In a variant, they may be two Belleville washers mounted in series and subjected to the action of declutching levers forming the declutching means.

In the figures represented, the clutching means 18 and the declutching means 22 belong to the same piece of annular shape called diaphragm, featuring a peripheral part of annular shape 18 forming a Belleville washer extended by a central part segmented into radial fingers 22 by blind slots, not visible in the figures, the bottoms of which form orifices widened at the inner periphery of the Belleville washer 18 of the diaphragm.

In the figures, the diaphragm 18, 22, is mounted so as to pivot at the inner periphery of its Belleville washer 18 with the help of a primary support 26 carried by the bottom of the cover 19 and of a secondary support 27 carried by assembling means 28 passing through the widened orifices of the diaphragm. Here, the primary support 26 is formed by stamping of the back of the cover while the secondary support 27 belongs to a circlip ring carried by lugs 28 passing through the

widened orifices of the diaphragm 18, 22 and forming the abovementioned assembling means, as described in the document FR A 2 585 424 to which reference can be made for further details.

5 In a variant, the assembling means may include lugs or distance rods as described in Figures 7 to 15 of the document FR A 2 456 877.

10 Thus, in clutch-engaged position, the diaphragm bears on the primary support 26 and on the bossing which the pressure plate 17 has on its back. To disengage the clutch, action is applied by the use of the clutch release bearing 23, in the figures represented, by pushing on the inner ends of the fingers of the diaphragm in order to make the diaphragm pivot, which then
15 bears on the secondary support 27 formed at the outer periphery of the circlip ring.

20 During this operation, the load exerted by the diaphragm 18, 22 on the pressure plate 17 reduces, then cancels out, the lugs 25 exerting an action of returning the plate towards the back of the hollow-shaped cover 19 so as to release the friction linings 16.

25 In these figures, the outer periphery of the Belleville washer 18 bears on the bossing of the pressure plate. In a variant, the structures are reversed such that the outer periphery of the Belleville washer 18 bears on the cover 19, while the inner periphery of the Belleville washer 18 bears on the bossing of the pressure plate 17, as can be seen, for example, in the document FR-A 2 606 477, the clutch then being of the
30 pulled type, the release bearing 23 then acting by pulling on the clutch in order to disengage it.

35 In the light of this latter document, it is seen that the clutch 3 can be equipped with a wear-take-up device in order to compensate for the wear on the friction linings 16. The pressure plate 17, by virtue of the lugs 25, forms a subassembly in one piece with the cover 19 and the diaphragm 18, 22. This subassembly is called clutch mechanism and is intended to be fixed,

here by screwing, onto the reaction plate 4 as can be seen in the figures; the cover 19 having the overall shape of a hollow plate with an outer radial rim for fixing to the plate 4 and a centrally holed back.

5 The friction disc 20 is, in the figures, of the elastic type, that is to say that the support 21 is coupled elastically to the hub 15 by way of a torsion damper 20a here with elastic elements 35, 36 with circumferential action in the form of coil springs. More
10 precisely, the support 21 is placed beside a first guide washer 29 integral with a second guide washer 30 via distance rods 31. These distance rods 31 also serve here for fixing the disc-shaped support 21, for example of the type described in the document FR-A 2 693 778.
15 The distance rods 31 pass axially through apertures 32 formed in a web 34. The first 29 and the second 30 guide washer are arranged on either side of the web 34 integral in rotation with the hub 15, here after taking up an angular play. This angular play is determined by
20 clearance-fit meshing means acting between the periphery of the inner web 34 and the outer periphery of the hub 15, teeth of the web 34 penetrating, with clearance, into notches of the hub 15 and vice versa.

 The springs 35, with circumferential action, are
25 mounted in windows, not referenced, formed face-to-face in the web 34 and the two guide washers 29, 30. Springs 36, of lesser stiffness than the springs 35, elastically couple the web 34 to the hub 15 as described in the document FR-A 2 726 618 to which reference should
30 be made for further details. This document also describes the axially acting elastic means and the friction means acting between the first guide washer 29 and the web 34.

 Between the web 34 and the second guide washer
35 30 a bearing is provided, acting between the hub 15 and the second guide washer 30, the said bearing being integral in rotation with the web 34 and serving to accommodate the spring 36. Needless to say, the disc 20

may have another shape, for example that described in Figures 1 to 4 of the document FR-A-2693778. The web 34 may be integral with the hub 15.

As emerges from the description, the reaction plate 4 features a friction face 37 on its back for contact with the adjacent lining 16 of the friction disc 20. The friction linings 16 are intended to be clamped between this friction face 37 and the one which the pressure plate 17 has, face-to-face with it. This friction face 37 internally delimits a central recess 39 such that the flywheel 13 is centrally of hollow shape. According to one characteristic, the second guide washer 30 penetrates inside this recess 39, radially under the face 37, for reducing the axial bulk. Hence, the second guide washer 30 is further from the pressure plate 17 and from the cover 19 than the first guide washer 29 is. This washer 30 is placed in the central recess 39 offset axially with respect to the friction face 37 towards the front face of the flywheel 13.

The friction disc 20 therefore features, at its outer periphery, at least one friction lining 16 integral with a support 21 coupled elastically by a torsion damper 20a to a central hub 15. The damper 20a penetrates into the recess 39 delimited externally by the friction face 37.

This results in the friction face 37 being offset axially with respect to the rotor 6.

In the embodiment of Figure 1, the declutching device 24 includes a declutching fork 50 mounted so as to pivot on the back of the bell housing 14 with the aid of a ball joint 51 integral with the bell housing 14. The upper end of the fork is shaped to receive the extremity of a cable linked to the declutching pedal. The control of the declutching release bearing 23 is thus of manual type, this declutching release bearing 23 including, in a known way, a ball bearing one of the rings of which is rotating and is configured for local

contact with the inner extremities of the fingers 22 of the diaphragm 18, 22. The other ring of the bearing is fixed and bears against the flange which a sleeve 53 features, subject to the action of the inner fingers of the declutching fork 50. The sleeve 53 slides along a guide tube 52 integral with the bell housing 14. The guide tube 52 is traversed by the shaft 12 coming into engagement with the hub 15. In this figure, the various inclinations of the fork 50 are seen during the declutching operation, the diaphragm visible 18, 22 being flat, overall, in clutch-engaged position. In the upper part of Figure 1, the clutch is engaged, while in the lower part, the clutch is disengaged. Here, the inner ring of the bearing of the release bearing 23 is rotating while the outer ring of the said bearing is fixed and features a radial rim in contact with the transverse flange of the sleeve 53 under the action of an axially acting elastic washer forcing the rim of the outer ring into contact with the said flange. The release bearing can thus move radially with respect to the flange and is of the self-centring type, a radial clearance existing between the radial rim of the outer ring and the sleeve 53.

By virtue of the invention, the release bearing 23 can come as close as possible to the first guide washer 29 which makes it possible to reduce the axial bulk.

The recess 39 of Figure 1 is stepped internally in staircase shape. Thus, this recess is delimited externally by a first annular portion of axial orientation 38 being connected at the rear to the friction face 37, and at the front to an annular shoulder of radial orientation 41. A second annular portion of axial orientation 42 is connected at the rear to the said shoulder 41 and at the front to the transverse rear face of a fixing bush 43 the inner periphery of which is in intimate contact with the outer periphery of the crankshaft 11. The second portion 42 therefore has a

diameter which is less than that of the first portion 38. The flywheel 13 is single-piece and therefore features, at the front, at its inner periphery, the bush 43 provided with holes 44 for screws 45 for fixing the flywheel 13 to the crankshaft 11 to pass through. The front face of the bush 43 is in contact with the crankshaft 11. The front extremity of the flywheel 13 is therefore intended to be fixed to the shaft 11.

The screws 45 are accommodated inside the second portion 42. Radially above the fixing bush 43, the flywheel 13 is thickened so as to form a sleeve 46 of axial orientation. This sleeve is delimited internally by the portion 42 and the bush 43 and externally by a cylindrical bearing surface 47 serving for mounting the pack of metal plates 9 of the rotor 6.

Thus the reaction plate 4 extends in radial projection with respect to the inner periphery of the rotor 6 and is offset axially with respect to the rotor 6.

The bush 43/sleeve 46 assembly is stirrup-shaped in cross section, the bush 43 extending radially towards the X-X axis and constituting the centrally holed back delimiting the recess 39.

The mounting bearing surface 47 is delimited to the rear by a shoulder 48. Radially, beyond the sleeve 46, the drive flywheel 13 is extended by the reaction plate 4 equipped at its periphery with the toothed crown ring 40. This reaction plate 4 is of decreasing thickness, going from its inner periphery to its outer periphery, such that an axial clearance exists between the squirrel cage 60 and the reaction plate 4 as well as between the chignons 8 and the reaction plate 4. The decreasing thickness of the reaction plate 4 is defined in order to avoid any interference with the rotor 5 and the stator 6. The plate 4 is therefore provided with a clearance notch for the chignons 8.

The pack of metal plates 9 of the rotor 6 is mounted by hooping onto the mounting bearing surface 47

of axial orientation until it comes into abutment against the shoulder.48..The pack of metal plates 9 is therefore heated up and subsequently cooled for fixing onto the bearing surface 47.

5 In a variant, the pack of metal plates 9 is fixed by a grooving device and keys onto the bearing surface 47.

 In a variant, the pack of metal plates 9 is fixed by splines acting between the pack of metal
10 plates 9 and the bearing surface 47.

 In a variant, the pack of metal plates is welded to the bearing surface 47.

 In a variant, the pack of metal plates 9 is fixed by means of screws passing through the pack of
15 metal plates 9 and the shoulder 48 so as to be screwed into the reaction plate 4, the heads of the screws bearing on a fixing ring in contact with the front extremity of the front pack of metal plates.

 In a variant, the sleeve 46 features, at its
20 outer periphery, a frustoconical bearing surface while the pack of metal plates 9 features a complementary bearing surface, at its inner periphery. The pack of metal plates 9 is therefore fixed by conical mating.

 In a variant, the pack of metal plates 9 is
25 mounted on the bearing surface 47 and is in contact at one of its extremities with the shoulder 48. At its other extremity, this pack is fixed by screws mounted into the thickness behind the outer surface (Figure 26) between the bearing surface 47 and the inner periphery
30 of the pack of metal plates 9.

 In all cases, the rotor 6 is integral, both axially and rotationally, with the single-piece flywheel 13 in Figure 1; the said flywheel 13 being obtained by moulding, here from cast iron, so that this flywheel 13
35 with its rotor 6 exhibits high inertia. Moreover, angular indexing of the rotor 6 with respect to the flywheel 13 can be carried out.

The rear extremity of the flywheel 13 consists of the reaction plate 4 delimited by the friction face 37.

The stator 5 is fixed in a similar way to the rotor 6 on a spacer 61. The outer periphery of the rotor 5 is fixed, for example, onto the inner periphery of the spacer 61 by hooping, in a variant by splines, in a variant by welding, in a variant by screws fitted into the thickness behind the outer surface in the same way as the pack of metal plates 9, etc., and is indexed in terms of angle. For further details on the screw fitting into the thickness behind the outer surface, refer to Figure 26 where the screws will be seen at 160 and 161.

The spacer 61 has an annular shape and is notched to allow the connector 63 linked to the extremities of the windings to pass through. Another connection device coming from the abovementioned control device, also forming a power device, is coupled to the connector 63, seen better in Figure 25, to supply the windings of the rotor 5.

The spacer 61 is interposed between the free extremity of the bell housing 14 and the engine block 62. The bell housing 14, at its free extremity, features a radial rim for supporting the heads of fixing screws 64 passing through the spacer 61 and being fixed onto the engine block 62.

The spacer 61 is equipped with cooling fins, seen better at 183 in Figures 21 and 22.

It will be noted in Figure 1 that the second guide washer 30 is accommodated in the space delimited by the segment 38 and the shoulder 41; only the inner extremity of the second guide washer 30 penetrates slightly deeper into the stepped recess 39.

Needless to say, in a variant, as represented in Figure 2, the drive flywheel 13 is in several pieces or parts, namely, a reaction plate 4 of hollow shape and an annular spacer 130, 131, 46 overall of U-shaped

cross section. This spacer is interposed between the plate 4 and the crankshaft 11, being centred by the said crankshaft. The spacer 130, 131, 46 centres the reaction plate 4 at its rear extremity. To do this, the spacer is recessed to the rear. The first branch of the U, namely the inner or lower branch closest to the X-X axis, is overall a form of inner tube 131 provided with piercings for a first series of fixing screws 145 to pass through, the heads of the screws bearing on the reaction plate and the body passing through the reaction plate 4 and the inner tube 131 so as to be screwed into the crankshaft.

The inner tube 131 features a second series of piercings of smaller diameter than that of the first series of piercings for screwing in a second series of screws 245 fixing the reaction plate 4 to the spacer 130.

The outer, or upper, branch 46 of the spacer 130, 131, 46 consists of the sleeve 46 serving for mounting the rotor 6 in the same way as in Figure 1.

The sleeve is therefore delimited by a shoulder 248 which here is turned towards the reaction plate 4. The back 130 of the U of the spacer 130, 131, 46 extends overall transversely and links together the two branches 46, 131 of annular shape and of axial orientation.

The spacer 130, 131, 46 includes an upper, rotor-support branch and a lower fixing branch constituting the spacer proper.

The inner tube 131, at its outer periphery, carries bearing means 132. These bearing means consist, for example, of a ball bearing, in a row of balls, in a variant with two rows of balls.

In a variant, the bearing means 132 include two ball bearings.

The inner ring of the ball bearing or ball bearings is therefore pushed into the inner periphery of the inner tube 131 while the outer ring of the ball

bearing or ball bearings 132 is pushed into the inside of an annular skirt 133 belonging to the periphery of a carrier piece 134 carrying, at its outer periphery, the spacer 61 onto which is fixed the stator 5 of the electric machine 2 in the same way as in Figure 1.

The carrier piece 134 follows the shape of the reaction plate 4 overall, while being adjacent to it at a distance. This piece has a tortuous shape because of the presence of the chignons 8.

10 The skirt 133, of axial orientation, penetrates into the cavity delimited by the branches 46, 131 of the spacer 130, 131, 46.

15 The carrier piece 134 is in a single piece with the skirt 133 and the spacer 131, being moulded integrally with it. This piece 134 is based on aluminium, for example. The same goes for the spacer 130, 131, 46.

20 The carrier piece 134 partly envelops the stator 6 and the rotor 5 and thus forms a shield-shaped mask preventing any contamination of the electric machine 2. The piece 134 is here integral with the spacer 61.

25 The reaction plate 4 is of cast iron as in Figure 1. Thus, it is possible to alter the inertia of the drive flywheel given that the spacer 130, 131, 46 is lighter than a cast-iron piece. Needless to say, if desired, this spacer may be of cast iron. The reaction plate, as in Figure 1, features a friction face 37 delimited internally by a first annular portion of axial orientation 38.

30 The reaction plate 4, at its inner periphery, features a ring 140 of overall axial orientation connected by an inclined portion internally of frustoconical shape 142 to the reaction plate 4 proper. The series of screws 145, 245, feature heads bearing on the ring 140. By virtue of the frustoconical part 142, it is possible to accommodate the second guide washer 30 of the torsion damper 20a within the central recess of the reaction plate 4 delimited by the ring 140 and the portions 142, 38.

By virtue of the inclined portion 142, any interference between the friction disc 20 and the heads of the screws 145, 245 is avoided.

It will be appreciated that, by comparison with
5 Figure 1, there is a precise and small gap 7 by virtue of the bearing means 132 and the carrier piece 134.

Thus, the gap between the rotor and the stator remains independent and insensitive to all the disturbances relating to the operation of the heat engine:
10 shaking, vibration, play, etc.

If the static stiffness is too great, the solution set out in Figure 5 or in Figures 23, 37 and 38 will be preferred. By virtue of the bearing means 132, the spacer is centred by the crankshaft 11 in such a
15 way that the presence of centring pins between the engine block of the vehicle and the spacer is not vital; centring means existing between the bell housing 14 and the spacer 61.

By virtue of the two series of screws 145, 245,
20 it is possible, in a first manufacturing stage, to manufacture the machine 2 equipped with the spacer 130, 131, 46. Then, to fix the reaction plate by the use of screws 145 and finally to fix the flywheel 13 onto the crankshaft by the use of the screws 145 [sic]. Next,
25 after insertion of the disc 20, the clutch mechanism 17, 25, 19, 18, 24 is fixed.

In a variant, and so as to increase the inertia of the clutch mechanism 17, 18, 19, 24, 25, a cast-iron cover 19 could be used.

Needless to say, as represented in Figure 3, it is possible further to reduce the axial bulk by dispensing with the declutching fork 50. In this case, the declutching device 24 is of the concentric type, since it is traversed centrally by the driven shaft 12. The
35 declutching device 24 may be of the cable-controlled type as described in US-5,141,091. In this case, the declutching release bearing 23 is carried by a driven piece fixed in rotation and moveable in translation for

example by means of elastic lugs linking a flange of the driven piece to a housing integral with the bell housing 14. The driven piece is in a nut-and-bolt relationship with a driving piece fixed in translation and moveable in rotation for example by means of a ball bearing acting between the fixed housing and the driving piece which, at its periphery, carries a pulley for winding the control cable operated via the clutch pedal.

10 In a variant, as represented in Figure 3, the declutching device 24 is of the hydraulic type as described in the document FR-A-2,730,532. In this case, the declutching release bearing 23 is carried by a piston 241 moveable axially with respect to the guide tube 15 52 integral, for example by crimping, with an outer body 242 fixed onto the clutch bell housing 14, for example with the aid of lugs as described in the document FR-A-2,730,532. The outer body 242 surrounds the guide tube and defines, with it, a blind annular cavity 243 20 of axial orientation, the back of which consists of a radial rim which the guide tube features at its rear extremity. This radial rim is fixed, for example by crimping, onto the outer body 242 equipped with a supply inlet for control fluid, such as oil, linked to a 25 piercing, not visible, opening out in the cavity 243 in the region of its back. The supply inlet can be seen better in Figures 16 and 17, and features a through-channel. The piston 241 penetrates into the cavity 243 and, leaktightly with it, delimits a variable-volume 30 chamber. A pre-loading spring 244 acts between the body 242 and the front extremity of the piston 241 in order to keep the release bearing 23 constantly pressing against the extremities of the fingers 22 of the diaphragm 18, 22. Protective bellows 246 are also provided, surrounding the spring 244. By comparison with 35 Figure 1, the outer ring 23 of the bearing is rotating while the inner ring of the bearing is fixed. For further details, refer to the document FR-A-2,730,532. It

is seen that the distance between the back of the bell housing 14 and the cover, 19 is reduced because of the absence [lacuna] fork 50. This is because, in Figures 1 and 2, it is necessary to provide additional space for the angular movements of the fork. The declutching device 24 thus forms the hydraulic receiver of a hydraulic control the transmitter of which is actuated either manually by the declutching pedal or semi-automatically by an electric-motor actuator controlled according to predetermined programmes for changing gear ratio by an electronic computer receiving information especially from sensors measuring the speed of rotation of the shafts 11 and 12, as well as the movement of the declutching release bearing 23 of the plate 17.

These sensors can be used to control the electric machine 2. Needless to say, in a variant, the reaction plate 4 features a crown ring 40 as in Figure 1 allowing a sensor to measure the speed of rotation of the drive shaft 11. The sensor may be of the optical type, so as not to be disturbed by magnetic phenomena.

The sensors may be placed at any appropriate site and thus serve both for control of the electric machine 2 and for control of the abovementioned electric-motor actuator, the electronic computer being common to the electric machine 2 and to the electric-motor actuator.

It is evident that the electric machine thus makes it possible to synchronise the rotational speeds of the shafts 11 and 12 by accelerating or by braking the shaft 11, so that it is possible to use gearboxes without a synchronisation device with a positive-coupling device which can be shifted with slight effort. It results therefrom that the gearbox can be controlled by low-force actuators for changing and/or selecting ratios.

The changing of gear ratio is thus easier and faster since the speed of the two shafts is synchronised.

With the vehicle stopped at red lights, neutral engaged, the movement of the release bearing, as well as the changing of gear ratio, supply, via sensors, information for re-starting the heat engine.

5 Needless to say, as can be seen in Figure 4, the sleeve 46 may be a single piece with the reaction plate 4 and extend axially in the direction of the crankshaft 11. The bearing means 132 act between the inner periphery of the sleeve 46 and the outer periphery of the skirt 133 of the carrier piece 134 carrying the stator 10 5 while the hub 46 carries the rotor 6 at its outer periphery, in the abovementioned way. It is seen that, by comparison with Figure 3, the structures have been reversed, the carrier piece 134 being turned round so as to extend in the vicinity of the casing 62 of the heat engine.

15 It will be noted that, in Figures 2 to 4, the bearing means 132 extend above the fixing screws 145. In this Figure 4, the spacer 230 consists of a shaft passing through the central aperture of the ring 140 via a centring nose, at the front, the shaft 230 is recessed at 231 for centring it via the crankshaft 11. As in Figure 3, the second guide washer, not represented, penetrates into the central recess of the pressure plate delimited by the ring 140 and the portions 142, 25 38. It will be noted that the portion 38 is shorter than in Figures 2 and 3 while the portion 142 is more inclined. In Figures 2 and 3, the carrier piece 134 forms a dust catcher and thermal screen since it extends in the immediate vicinity of the reaction plate 4 and envelops the rotor and the stator. Thus, the particles, especially metallic particles, originating from the friction linings 16 of the friction disc 20 do not risk contaminating the electric machine 2, thus guaranteeing good efficiency.

30 The central recess 39 of the flywheel 13 therefore consists of the central recess of the reaction

plate 4 delimited externally by the friction face 37
for contact with the lining 16.

In Figure 4, the reaction plate features, at its outer periphery, an annular skirt of axial orientation 144 surrounding the friction linings 16 in such a way that the dust from the linings 16 does not come to contaminate the electric machine 2.

Furthermore, a groove 148 is provided at the inner periphery of the skirt 144 in order to catch the dust. This groove is connected to the friction face 37 of the reaction plate by a vertical side face and exhibits, in section, a back in the shape of a circular arc extended by an inclined side face. Needless to say, the groove 148 may be of any other shape. Nevertheless, it will be appreciated that the inclined side face directs the impurities towards the pressure plate 17. The impurities are driven by centrifugal force into the groove 148 constituting an anti-contamination groove.

Needless to say, in Figure 1, the plate 4 may be
20 equipped with such a skirt 144 with groove 148.

All combinations are possible. It will be noted that, in Figure 4, the spacer 61 is separate from the carrier piece 134.

The carrier piece 131 is fixed directly onto the engine block 62 by the use of fixing screws 164 passing, with radial clearance, through piercings 165 formed in lugs 166 which the carrier piece features beyond its outer periphery, because of the presence of the bearing means 132.

30 The spacer 61 is separate from the carrier piece
which, at its outer periphery, carries an annular skirt
261 for mounting the stator 5, for example by hooping
in the manner described above.

The spacer 61 is hollowed for the passage of the
35 lugs 166 distributed, for example, regularly at 120 de-
grees. The number of lugs depends on the applications.

Needless to say, the bearing means 132 can be installed over the same circumference as the fixing

[illegible]

screws 245 as visible in Figure 5. In this case, the sleeve 46 still belongs to the reaction plate the inner ring 140 of which is widened at its base in order to feature splines and to mesh with a shaft 330 featuring lugs 331 for fixing it with the aid of screws 245 [lacuna] the crankshaft 11. The rear extremity of the shaft is splined so as to interact with the splines of the ring 140. Thus, the reaction plate 4 is linked in rotation to the shaft 330. The ring 140 is keyed axially by a washer 333 fixed by screws 334 on the end of the shaft 330. On the other end, the ring 140 is keyed axially by the inner ring of the ball bearing constituting the bearing means 132. This bearing is interposed axially between the ring 140 and the heads of the screws 245. The carrier piece 134 of the stator 5 carries spacers 61 and has a much straighter shape than in Figure 4. It will be noted in Figures 4 and 5 that the carrier pieces 134 can be ribbed in order to stiffen them, which is not easy in Figures 2 and 3. In Figure 5, the ribs are of greater amplitudes than in Figure 4. It will be noted that the fixing elements 64 are mounted elastically in the through-holes 461 of the spacer 61, in order to avoid excess stiffness during the movements of the crankshaft, more precisely, the fixing elements 64 are surrounded by a split pin 462 which is itself surrounded by two shouldered bearing pads 463 made, for example, of an elastomer such as rubber, placed at the extremities of the through-holes 461. A certain degree of freedom therefore exists between the fixing elements 64, here in the form of a stud, and the sole 61 in such a way that the carrier piece is not clamped and is centred onto the shaft 330 by the ball bearing 132 with a small and precise gap being created. Needless to say, this type of elastic mounting is applicable in Figures 1 to 3.

Needless to say, it will be noted that the central recess of the reaction plate 4 in which the second guide washer 30 of the friction disc 20 is accommodated

is delimited here by the ring 140 and the annular portion of axial orientation, 38.

Thus, the torsion damper 20a may be thicker. It is even possible to mount two torsion dampers in parallel as described, for example, in the document US-A-3 101 600. It is thus possible to obtain large angular ranges of movement.

In Figure 6, in which the structures have been reversed with respect to the structure of Figure 5, such that the splined link is situated to the front and not to the rear, more precisely, in this embodiment, the ring 140 extends radially a little further radially inwards in the direction of the X-X axis so as centrally to feature a shaft 430 the front extremity of which is splined in order to come into engagement with splines present within a fixing pedestal 431 fixed by screws 345 to the crankshaft 11 of the engine. The carrier piece 134 is integral with the spacers 61 as in Figure 5 with an elastic mounting between the spacers and the fixing elements 64. The bearing means 132 are installed axially between the ring 140 and the pedestal 431 and consist of two ball bearings. The carrier piece 134 features a bush 432 at its inner periphery by which it is mounted onto the outer rings of the bearings 132 with an intermediate collar 433 for separating the two ball bearings 132. The bush 432 is provided with piercings 545 radially above the bearings 132 for access with the aid of tools to the heads of the fixing screws 345. Thus, the tools for fixing the screws pass through the carrier piece 134 and the ring 140. Needless to say, as described in the document FR-A-2 718 208, the fixing tools may also pass through the friction disc. To do that, it is sufficient to equip the friction disc with a raised pre-damper. It will be noted that, in Figures 2 and 3, the torsion pre-damper is of the type described in the document FR-A-2 718 208. This pre-damper therefore includes a web fixed onto the hub 15 and two guide washers arranged on either side of the

web and assembled together by clipping with the aid of lugs serving for rotational driving of the pre-damper with the web 34.

Needless to say, by comparison with this document FR-A2718208, the second guide washer has to be mounted in the recess of the reaction plate, that is to say the friction disc 20 has to be turned over.

In this case, it is obviously necessary to provide through-holes in the diaphragm for the tool or tools for fixing the screws to pass through, given that the said fixing tools may belong to a screwdriver or else be individual tools.

The screws or other fixing elements can be mounted in captive fashion in the machine. To do that, the heads of fixing screws may have a diameter greater than that of the abovementioned through-holes in the diaphragm, in the friction disc.

In this case, a module can be formed comprising the reaction plate 4, the friction disc 20 and the clutch mechanism comprising the plate 17, the diaphragm 18, 22 and the cover 19 as a unit.

This unit module can be balanced easily, for which reason a balancing chamfer can be seen at 1000 in Figure 6, formed at the outer periphery of the reaction plate 4. Thus, it is possible to remove more or less material at the desired sites in order, here dynamically, to balance the friction-clutch/electric-machine assembly since, in Figure 6, it is possible to produce the electric machine 2/friction clutch 3 assembly, pedestal 431 then finally, using screws 345, to screw the assembly onto the crankshaft 11.

Needless to say, the tool or tools for fixing the screws 345 may not pass through the friction [lacuna] and the clutch mechanism. In this case, a drive flywheel 13/electric machine 2 and pedestal 431 subassembly can be produced, which can be balanced dynamically then mounted on the crankshaft 11 by the use of screws 345. Next, the friction disc 20 is put in place

then the clutch mechanism is fixed, knowing that it can be balanced dynamically in a known way, for example by piercing the pressure plate 17 at the desired sites and or adding balancing rivets fixed for example onto the peripheral rim of the cover.

It will be noted that, in Figure 6, the pedestal 431 is keyed axially, on the one hand, to the rear on the shaft 430 by the ball bearing 132 farthest from the ring 140 and, on the other hand, to the front, on the shaft 430, by a washer 434 held in place by a circlip 435 engaged in the free extremity of the shaft 430.

In a general way, in Figure 6, it is possible to produce at least one electric-machine 2/drive-flywheel 13/pedestal 431 subassembly which is mounted in a single move on the crankshaft. This subassembly, in a variant, possibly comprising [sic] the friction clutch 3, in the abovementioned way.

In all the figures, balancing of the electric-machine 2/drive-flywheel 13 assembly can be carried out by removing material, for example from the reaction plate, or from the spacer 130, 131, 46 or from the shaft 330 or, in a general way, from any other piece rotating around the axis X-X and integral in rotation with one of the shafts 11 and 12, for example, material can be removed from the pressure plate 17.

Needless to say, the reverse can be carried out, that is to say some material can be added at the desired sites on any piece rotating around the axis X-X is [sic] integral in rotation with one of the shafts 11 or 12. It is possible, for example, to add balancing rivets to the cover 19, to the reaction plate 4, to the spacer 130, 131 and 46, to the sleeve 46.

Balancing is therefore done by adding or removing mass on the flywheel 13 or on the clutch mechanism 17, 18, 22, 19, and the out-of-balance of the heat engine can be corrected, especially in the case of three cylinders, by removing or by adding material.

The balancing can therefore lead to the presence of an out-of-balance, on the electric-machine 2/friction-clutch 3 assembly in order to correct the out-of-balance of the heat engine. The heat-engine/friction-clutch device 2, 3 assembly equipped with the electric machine is therefore balanced.

In a general way, it will be noted that the bearing means 132 of Figures 2 to 6 are configured so as to be brought close to the centre of gravity of the rotating parts, that is to say of the assembly 1. Hence, in Figure 6, the bearing means consisting of the two ball bearings are installed radially below the rotor 6 and the stator 5, and this can be done in a way which is symmetric overall with respect to the axis of radial symmetry of the rotor and of the stator. In this figure, these bearing means are installed radially below the friction face 37 of the reaction plate 4.

It will be noted that, in this Figure 6, the rotor 6 is fixed to its inner periphery radially below the friction linings.

The same goes for the other figures. Needless to say, in a variant, the rotor 6 can be fixed radially at the linings 16, between the inner and outer periphery thereof. It is sufficient, in Figure 2, for example, to increase the radial size of the back 130.

In Figures 2 and 3, the bearing means 132 are installed radially below the rotor 5 and the stator 6 while being offset axially towards the reaction plate with respect to the axis of radial symmetry of the rotor 6 and of the stator 5.

In Figure 4, the bearing means 132 are still installed radially below the rotor 6 and the stator 5, while being offset axially in the direction opposite to the reaction plate 4 with respect to the axis of radial symmetry of the rotor 6 and of the stator 5.

The same is true in Figure 5, in which this offset is more marked, the bearing means 132 being offset

axially overall with respect to the rotor 6, this time in the opposite direction to the reaction plate 4.

All this depends on the shape of the central recess of the flywheel 13 and therefore of the reaction plate 4.

It will be appreciated that the location of the second guide washer 30 within the central recess of the reaction plate 4 offsets the centre of gravity of the assembly 1 towards the bearing means 132.

The hollow shape of the reaction plate 4 is beneficial since the inner periphery of the reaction plate 4 is closer to the rotor 6 than is the friction face 37 of the said plate, such that the centre of gravity of the assembly is shifted towards the electric machine.

Needless to say, material can be removed in the region of the front face of the reaction plate 4 which is turned towards the chignons 8. It is for this reason that the reaction plate 4 of Figures 1 and 4 features a variable thickness at its outer periphery and facing the chignons 8.

Thus, the chignons penetrate into a notch or recess of the engine flywheel. In a variant, recesses can be provided in the casing 62 of the heat engine.

Needless to say, the flywheel 13 can be shaped to mark the speed and or the position of the rotor 6 by the use of one or more sensors. For example, the toothed crown ring 40 may be associated with two sensors, one radial, the other of axial orientation, in order to mark the speed and or the position of the rotor.

These sensors can be carried by the bell housing 14. In a variant, at least one of these sensors is carried by the stator 5 or the carrier piece 134. One of these sensors, of radial orientation, for example, serves for the injection control of the internal-combustion engine and the other, for example of axial

orientation, serves for the control of the electric machine which may be of any type.

In a variant, the information sensor belongs to the bearing means 132. These bearing means then advantageously consist of one or more ball bearings which are instrumented in order to form a sensor of the rotational speed of the drive flywheel. The wires of these instrumented ball-bearing-type sensors are then advantageously supported by the carrier piece 134 so as to join up with the connector 63 of the electric machine 2.

The ball bearing may be of the type described in the document FR-A 2,599,794 and include a magnetic-field sensor carried by the fixed ring of the bearing and at least one multi-pole magnetised ring carried by the rotating ring with a gap present.

It is therefore advantageous for these sensors to be carried by the fixed part of the electric machine 2.

Needless to say, depending on the electric machines, the sensors can also be used to measure the speed or the position of the rotor.

Needless to say, arrangements can be provided for cooling the electric machine 2.

For example, in Figure 5, fins 1200 are provided on the front face of the reaction plate 4, facing the rotor 6. These fins are installed above the chignons 8, while advantageously being inclined in the fashion of the vanes of a fan.

Needless to say, in a variant, as can be seen at 1201 in Figure 5, the fins originate from the portion 38. Advantageously, holes are formed in the carrier piece and in the ring 140 and in the portion 38 of the reaction plate 4 in order to produce a circulation of air as can be seen in dotted lines in Figure 5.

In a variant, the shaft carries fins referenced as 1203. Needless to say, the fins can be produced at

the outer periphery 431 of the pedestal 430 as represented in Figure 6.

In Figures 2 and 3, the fins could originate from the back 130 of the spacer 130, 131, 46. The fins may be formed at the extremities of the pack of metal plates 9.

The fins may be on the casing of the machine. The cooling, if it is done by air, can be forced (air-flow from the outside into the machine or conversely) or by internal ventilation, or by natural convection.

In a variant, as can be seen in Figures 7 and 8, the stator 8 can be cooled by the use of a heat-carrying fluid.

Thus, in Figure 7, the metal plates 10 of the stator 6 are pierced.

The pack of pierced metal plates 10 is then delimited advantageously by two flanges 10a, 10b having a shape making it possible to transport the heat-carrying fluid from one face to the other of the stator by passing through the holes formed in the stator.

In a variant, as represented in Figure 8, the end flanges are dispensed with and replaced, for example, by overmoulded, bent hoses 10c, made of aluminium, for example.

Advantageously, the spacer is of the same type as in Figure 21, the same pack of metal plates forming a spacer. In this case, two series of metal plates are provided, identical at their inner periphery, the piercings being formed in the outermost series of metal plates.

Advantageously, the chignons are also overmoulded, so protecting their varnish by giving them a coat of a resin loaded with heat-carrying elements.

Needless to say, in order to control the majority of electric machines, it is necessary to index the position of the rotor with respect to the stator, as well as the position of the sensors with respect to the rotor.

In Figure 9, the flywheel 13 of Figure 1 has been represented, forming a subassembly with the machine 2. This subassembly is delivered as represented in Figure 9.

5 When the electric machine 2 is operating in motor mode, especially in starter mode in the abovementioned way, it is necessary to know the position and/or the speed of the rotor with respect to the stator.

 Hence, recourse is had to a removable mechanism
10 plate 3000 carrying at least one gauge rod 3001, projecting axially and penetrating, with centring, into a hole 3002 formed in the pack of metal plate [sic] 10 of the stator 6 beyond the chignons 8. The mechanism plate is fixed to the reaction plate 4 using screws 3003 each
15 screwed into a tapping 3004 of the reaction plate 4 and bearing, by their head, on the rear face of the mechanism plate 3000.

 By virtue of the gauge rod 3001, the stator 6 is indexed in rotation with respect to the rotor 5 knowing
20 that the mechanism plate 3000 is screwed, using screws 3005, into tapped holes 3006 present on the spacer 61 carrying the pack of metal plates 10 of the stator 6, in the abovementioned way.

 Furthermore, the mechanism plate 3000 carries
25 shims 3007 fixed to the rear face of the mechanism plate 3000 using screws 3008. The shims 3007 pass through a passage 3009 of the mechanism plate and a passage 3010 of the reaction plate 4 so as to be interposed between the inner periphery of the stator 5 and
30 the outer periphery of the rotor 6.

 Thus the gap 7 is kept rigid while having indexing of the rotor 6 with respect to the stator 5. The gap thus obtained is constant and depends on the width of the shims 3007.

35 Hence, the subassembly is mounted on the casing 62 of the engine block by the use of screws 45 and of studs 64 replacing the screws 64 of Figure 1. Next, the screws 3003 and 3005 are unscrewed in order to remove

the mechanism plate equipped with the gauge rod 3001 and with the shims 3007. Next, the friction disc 20 is accommodated in the central recess of the reaction plate and, finally, the clutch mechanism is fixed onto the reaction plate 4. It will be noted that, in all the figures, the hub 15 extends to a major extent into the central recess 39 of the flywheel 13.

After mounting, the mechanism plate 3000 with the gauge rods 3001 and the shims 3007 is recovered by the manufacturer of the machine. This solution presents numerous advantages, since, in addition to the guarantee of the constant gap, transport of the rotor/stator assembly is also facilitated, thus allowing delivery of the machine in a single piece.

In a variant, the use of the mechanism plate 3000 is dispensed with by producing a constant gap by optical setting carried out by means of jacks acting radially, for example on the portion 42 of the reaction plate 4.

It will be noted that, in Figure 9, the reaction plate 4 features an inclined portion 142 connecting the portions 42 and 38 together. Thus, the central recess of the flywheel 13 may have all the appropriate shapes resulting from the different figures.

Needless to say, it is also possible, as represented in Figure 11, to provide a force sensor 2000, integrated into the concentric-type declutching device (24), as represented in Figure 3, or into any other elastic element varying continually in the control of movement, independently of the clutching or braking effort.

Thus, the position of the clutch-release bearing 23 is picked up outside the hydraulic fluid by the conversion of the force information from the pre-load spring 244 into relative or absolute position information as required.

Thus, the digital or analogue signal delivered by the force sensor 2000 is processed by a computer,

outside or inside the said sensor, in order to determine the relative or absolute position of the clutch-release bearing 23.

Thus, this force sensor 2000, associated with
5 the pre-load spring independent of the clutching or braking force, makes it possible, as represented in figure 11, to distinguish the two positions B and C which the clutch-release bearing 23 may take up.

It is seen in Figure 11 that this force sensor
10 2000 makes it possible easily to distinguish the two points B and C which represent the same clutching or braking force represented by point A of Figure 11 in which the clutch or braking forces have been represented on the Y axis and the movements on the X axis.

This characteristic curve is due here to the
15 well known characteristic curve of a diaphragm.

Advantageously, the position sensor 2000 is placed directly under the pre-load spring 244, that is to say between the rear extremity of the pre-load
20 spring 244 and the outer body 242.

Advantageously, an intermediate shim, not represented in Figure 10, will be placed between the force sensor 2000 and the pre-load spring 244.

This shim may consist of the protection bellows
25 246 which are thus immobilised.

Needless to say, the present invention is not limited to the embodiment examples described; in particular, the support 21 may be in a single piece with the first guide washer 29.

A single guide washer may be provided as disclosed in the document FR-A2390617. In all cases, the hub 14 penetrates to a major extent into the recess 39 and extends asymmetrically with respect to the support 21 of the linings 16. The torsion damper 20a thus extends to a major extent within the recess 39.
35

In a general way the support 21 is coupled elastically to the hub 15 by a torsion damper 20a penetrating into the central recess 39 of the flywheel 13 and

thus of the reaction plate 4 for reducing the axial bulk of the subassembly 1, Thus, the elastic elements 4 may consist of spiral springs acting between the support and the hub. The elastic elements may consist of
5 blades or else blocks of elastomer material interposed in this case between the hub and a collar integral with the support 21.

Needless to say, the structures can be reversed. Hence, in Figure 12, the pedestal 431 can be replaced
10 by a flange 431a featuring, at its outer periphery, the sleeve 46 and the shoulder 48. This flange is traversed by the screws 345 as in Figure 6. The piece 134 is, in this case, close to the reaction plate 4. The direction of the carrier piece 134 has therefore been reversed.

Here, the shaft 430a is frustoconical and the
15 flange 431a centrally features a hub 431b with an internal bore of frustoconical shape for mounting, in a complementary fashion, on the frustoconical outer periphery of the shaft 430a. A nut 431c, mounted on the
20 extremity of the shaft 430a, makes it possible to lock the complementary cones.

The flange 431a is thus linked in rotation to the shaft 430a.

It can be seen, in the light of this description,
25 tion, that the piece 134 of Figure 12 can be replaced by a web originating from the sleeve 431b, for example, by moulding.

The sleeve 46 may be separate from the flange 431a and be secured to the engine casing 62, the bearing means 132 being dispensed with, obviously, as well
30 as the spacer 61.

Hence the web would carry the rotor while the sleeve 48 would carry the stator in such a way that the rotor would surround the stator.

Hence, the rotor can extend radially beyond the
35 friction linings 16 without increasing the radial bulk.

Needless to say, the carrier piece 134 of the stator and the bearing means 132 can be retained, the

said carrier piece then being adjacent to the internal-combustion engine, the rotor being carried, raised up, by the web. This web is then installed axially between the reaction plate 4 and the carrier piece. It advantageously has a sinuous shape and features, at its outer periphery, a shouldered sleeve 46. Advantageously, the web is ribbed.

The same thinking can apply in Figures 2 and 3, the carrier piece being replaced by a web while the sleeve 46 would be fixed onto the engine casing 62, the spacer 61 being dispensed with.

The rotor can thus be carried by a web integral with the engine flywheel in order to surround the stator. The said web being [sic] C-shaped overall like that of Figures 2 and 3.

In these Figures 2 and 3, the carrier piece 134 is deformed locally by stamping in order to create a clearing for the chignons 8.

Thus, clearance means are provided for the chignons and consist either of a reduction in the thickness of the reaction plate 4 or in deformations of the carrier piece 134.

In a variant, a groove can be created in the reaction plate in order to form a clearance for the chignons 8.

Likewise, cooling means are provided in order to cool the machine. The cooling means can be carried by the stator 5 Figures 7 and 8, or by the flywheel by means of fins 1200, 1201 of Figure 5 or of fins integral with the rotor as described below.

In a variant, the support piece or the web forms a thermal screen.

It will be noted that the arrangements of Figures 2,3 and 12 are advantageous, since the flow of the heat by conduction from the reaction plate 4 to the sleeve 46 follows a long path which is advantageous for the electric machine 2.

Likewise, the flow path of the heat by conduction between the reaction plate 4 and the stator 5 is very long having regard to the configuration of the carrier piece (Figures 4, 5, 6 and 12).

5 The through-holes 545 further enhance the cooling.

Needless to say, a heat-carrying fluid may advantageously pass through the spacers 61 of Figures 1 to 6, 9 and 12 in order to cool the stator 5 surrounding the rotor 6.

Equally, this same fluid may also pass through the pack of metal plates 10 of the stator 5 as represented in Figures 7 and 8.

Hence, in the embodiment of Figures 13 to 15, the spacer 61 has an annular shape and is made of mouldable material, here based on aluminium. This spacer 61 features a cylindrical inner periphery 6000 onto which the pack of metal plates 10 is hooped, as in Figure 1. In Figure 14 is seen one of the metal plates, of annular shape, of this pack 10, featuring recesses at its outer periphery for weld beads 6001 to pass through, making it possible to perfect the integration of the pack of metal plates to the spacer 61 surrounding the drive flywheel 13, except for the reaction plate 4 thereof.

In practice, Figure 13 differs from Figure 1 only in the spacer 61, such that the same reference signs will be repeated.

Each annular metal plate of the stator 5 features notches, at its inner periphery, dedicated to the winding of the stator.

The spacer 61 features two opposing faces, in its thickness, defining a cooling chamber 6002 receiving a heat-carrying fluid, here a cooling liquid. This liquid makes it possible rapidly to remove the heat produced by the operation of the electric machine. In this cooling method, the stator transfers its heat to the inner periphery 6000 of the spacer 61 by contact.

Next, this heat is transmitted by forced convection, from the inner periphery 6000 to the cooling liquid, in motion, here in the cooling-water circuit of the combustion engine of the vehicle.

5 The cooling chamber 6002 is of oblong shape axially, in order to cool the spacer and the stator to the maximum and, circumferentially has the shape of a tortuous channel making it possible to remove the heat well and to get round the passage for the holes 6003
10 which are intended for the elements 64 (here screws) for fixing the spacer 61 to the engine block 62 and to the clutch bell housing 14 between which the spacer 61 is interposed.

 The clutch bell housing surrounds the clutch 3.
15 In a variant, the chamber 6002 circumferentially has the shape of a cylindrical channel.

 The outer periphery 6004 of the spacer has an overall undulating shape with protuberances or bulges 6005, 6006, 6007 and 6010 produced by moulding.

20 These protuberances make it possible to reduce the weight of the spacer.

 The bulges 6005, of semi circular shapes, are each provided with a through-hole 6003 for the fixing elements 64. It will be noted that the holes 6003 may
25 be arranged on either side of the chamber 6002 as can be seen in Figure 14.

 The boss-shaped bulge 6006 carries the inlet and outlet ducts 6008 of the chamber 6002 of the circuit for cooling the alternator/starter.

30 These ducts 6008 are connected to the cooling circuit of the internal-combustion engine of the vehicle.

 These abovementioned connecting means may rely on hoses and/or rapid leaktight unions as described,
35 for example, in the document FR 2756608, such that the chamber 6002 can be pre-filled.

Each duct 6008 is associated with a widened, respectively inlet and outlet, orifice 6009 formed in the bulge 6006.

5 In a variant, the inlet and outlet ducts 6008 can be dispensed with, and the orifices 6009 can be connected directly to second orifices opposite, formed on the engine block 62 with sealing means such as O-rings acting between the engine block 62 and the spacer 61.

10 These second orifices communicate with the cooling circuit of the engine.

In all cases, the chamber 6002 extends the cooling circuit of the engine of the vehicle.

15 Needless to say, angular-indexing means are provided between the spacer and at least the engine block 62. Hence, a bulge can be seen at 6010, with, on either side of the chamber 6002, a hole 6003 for a fixing element 64 to pass through, and a hole 6011 for an indexing rod to pass through, the rod being carried, for example, by the block 62 and penetrating into the spacer.

20 The chamber 6002 is obtained by moulding using a substance which is removed after moulding such as sand. Hence, means can be seen at 6012 for removing the sand during the mould-removal operation.

25 These means include at least one through-hole to the outer periphery of the spacer 12, this hole being closed off finally by a leaktight plug.

30 Needless to say, a linking channel 6013 exists between the 2 orifices 6009 in order to allow for the moulding operation.

The bulge 6007 is provided at the lower part and internally features a piercing 6014, here threaded, opening out into the chamber 6012.

35 This piercing 6014 allows for a screw 6015 to be screwed in, with a sealing gasket 6016, here an O-ring, interposed between the head of the screw 6015 and the crest of the bulge 6007.

As will have been understood, by unscrewing the screw 6015, it is possible to empty the chamber 6002 of its cooling liquid.

Advantageously, the piercing 6014 is situated in
5 the lowest part of the chamber 6002.

Needless to say, the positioning of the piercing 6014, in the lower position of the chamber 6002 also makes it possible to empty the cooling circuit of the internal-combustion engine of the vehicle as well as
10 the cooling circuit of the main radiator of the vehicle.

This possibility for emptying the complete cooling circuit of the vehicle is made possible by the fact that the chamber 6002 for cooling the alternator/starter passes through at least one point placed at
15 the lowest point of the cooling circuit of the vehicle.

It is thus possible to save on at least the emptying plug of the cooling circuit provided on the internal-combustion engine.

Needless to say, it is also possible to save on
20 the emptying plug of the main cooling radiator of the vehicle.

In all cases, the piercing 6014 should be placed at least lower than the lowest position of the cooling
25 circuit of the internal-combustion engine comprising the main cooling radiator.

Needless to say, the screw 6015 can be replaced by any other removable closure element, such as a threaded plug, for example, of the type generally provided for emptying the oil circuit of the vehicle.
30

The piercing 6014 may therefore be partly threaded.

The spacer 61 is therefore provided with means for emptying its chamber.

In a variant, the spacer 61, equipped with its
35 cooling chamber 6002 and internally carrying the stator 5, may be a single piece with the engine block 62 or with the clutch bell housing 14.

6002 6014 6015 6016 6017 6018 6019 6020 6021 6022 6023 6024 6025 6026 6027 6028 6029 6030 6031 6032 6033 6034 6035 6036 6037 6038 6039 6040 6041 6042 6043 6044 6045 6046 6047 6048 6049 6050 6051 6052 6053 6054 6055 6056 6057 6058 6059 6060 6061 6062 6063 6064 6065 6066 6067 6068 6069 6070 6071 6072 6073 6074 6075 6076 6077 6078 6079 6080 6081 6082 6083 6084 6085 6086 6087 6088 6089 6090 6091 6092 6093 6094 6095 6096 6097 6098 6099 6100 6101 6102 6103 6104 6105 6106 6107 6108 6109 6110 6111 6112 6113 6114 6115 6116 6117 6118 6119 6120 6121 6122 6123 6124 6125 6126 6127 6128 6129 6130 6131 6132 6133 6134 6135 6136 6137 6138 6139 6140 6141 6142 6143 6144 6145 6146 6147 6148 6149 6150 6151 6152 6153 6154 6155 6156 6157 6158 6159 6160 6161 6162 6163 6164 6165 6166 6167 6168 6169 6170 6171 6172 6173 6174 6175 6176 6177 6178 6179 6180 6181 6182 6183 6184 6185 6186 6187 6188 6189 6190 6191 6192 6193 6194 6195 6196 6197 6198 6199 6200 6201 6202 6203 6204 6205 6206 6207 6208 6209 6210 6211 6212 6213 6214 6215 6216 6217 6218 6219 6220 6221 6222 6223 6224 6225 6226 6227 6228 6229 6230 6231 6232 6233 6234 6235 6236 6237 6238 6239 6240 6241 6242 6243 6244 6245 6246 6247 6248 6249 6250 6251 6252 6253 6254 6255 6256 6257 6258 6259 6260 6261 6262 6263 6264 6265 6266 6267 6268 6269 6270 6271 6272 6273 6274 6275 6276 6277 6278 6279 6280 6281 6282 6283 6284 6285 6286 6287 6288 6289 6290 6291 6292 6293 6294 6295 6296 6297 6298 6299 6300 6301 6302 6303 6304 6305 6306 6307 6308 6309 6310 6311 6312 6313 6314 6315 6316 6317 6318 6319 6320 6321 6322 6323 6324 6325 6326 6327 6328 6329 6330 6331 6332 6333 6334 6335 6336 6337 6338 6339 6340 6341 6342 6343 6344 6345 6346 6347 6348 6349 6350 6351 6352 6353 6354 6355 6356 6357 6358 6359 6360 6361 6362 6363 6364 6365 6366 6367 6368 6369 6370 6371 6372 6373 6374 6375 6376 6377 6378 6379 6380 6381 6382 6383 6384 6385 6386 6387 6388 6389 6390 6391 6392 6393 6394 6395 6396 6397 6398 6399 6400 6401 6402 6403 6404 6405 6406 6407 6408 6409 6410 6411 6412 6413 6414 6415 6416 6417 6418 6419 6420 6421 6422 6423 6424 6425 6426 6427 6428 6429 6430 6431 6432 6433 6434 6435 6436 6437 6438 6439 6440 6441 6442 6443 6444 6445 6446 6447 6448 6449 6450 6451 6452 6453 6454 6455 6456 6457 6458 6459 6460 6461 6462 6463 6464 6465 6466 6467 6468 6469 6470 6471 6472 6473 6474 6475 6476 6477 6478 6479 6480 6481 6482 6483 6484 6485 6486 6487 6488 6489 6490 6491 6492 6493 6494 6495 6496 6497 6498 6499 6500 6501 6502 6503 6504 6505 6506 6507 6508 6509 6510 6511 6512 6513 6514 6515 6516 6517 6518 6519 6520 6521 6522 6523 6524 6525 6526 6527 6528 6529 6530 6531 6532 6533 6534 6535 6536 6537 6538 6539 6540 6541 6542 6543 6544 6545 6546 6547 6548 6549 6550 6551 6552 6553 6554 6555 6556 6557 6558 6559 6560 6561 6562 6563 6564 6565 6566 6567 6568 6569 6570 6571 6572 6573 6574 6575 6576 6577 6578 6579 6580 6581 6582 6583 6584 6585 6586 6587 6588 6589 6590 6591 6592 6593 6594 6595 6596 6597 6598 6599 6600 6601 6602 6603 6604 6605 6606 6607 6608 6609 6610 6611 6612 6613 6614 6615 6616 6617 6618 6619 6620 6621 6622 6623 6624 6625 6626 6627 6628 6629 6630 6631 6632 6633 6634 6635 6636 6637 6638 6639 6640 6641 6642 6643 6644 6645 6646 6647 6648 6649 6650 6651 6652 6653 6654 6655 6656 6657 6658 6659 6660 6661 6662 6663 6664 6665 6666 6667 6668 6669 6670 6671 6672 6673 6674 6675 6676 6677 6678 6679 6680 6681 6682 6683 6684 6685 6686 6687 6688 6689 6690 6691 6692 6693 6694 6695 6696 6697 6698 6699 6700 6701 6702 6703 6704 6705 6706 6707 6708 6709 6710 6711 6712 6713 6714 6715 6716 6717 6718 6719 6720 6721 6722 6723 6724 6725 6726 6727 6728 6729 6730 6731 6732 6733 6734 6735 6736 6737 6738 6739 6740 6741 6742 6743 6744 6745 6746 6747 6748 6749 6750 6751 6752 6753 6754 6755 6756 6757 6758 6759 6760 6761 6762 6763 6764 6765 6766 6767 6768 6769 6770 6771 6772 6773 6774 6775 6776 6777 6778 6779 6780 6781 6782 6783 6784 6785 6786 6787 6788 6789 6790 6791 6792 6793 6794 6795 6796 6797 6798 6799 6800 6801 6802 6803 6804 6805 6806 6807 6808 6809 6810 6811 6812 6813 6814 6815 6816 6817 6818 6819 6820 6821 6822 6823 6824 6825 6826 6827 6828 6829 6830 6831 6832 6833 6834 6835 6836 6837 6838 6839 6840 6841 6842 6843 6844 6845 6846 6847 6848 6849 6850 6851 6852 6853 6854 6855 6856 6857 6858 6859 6860 6861 6862 6863 6864 6865 6866 6867 6868 6869 6870 6871 6872 6873 6874 6875 6876 6877 6878 6879 6880 6881 6882 6883 6884 6885 6886 6887 6888 6889 6890 6891 6892 6893 6894 6895 6896 6897 6898 6899 6900 6901 6902 6903 6904 6905 6906 6907 6908 6909 6910 6911 6912 6913 6914 6915 6916 6917 6918 6919 6920 6921 6922 6923 6924 6925 6926 6927 6928 6929 6930 6931 6932 6933 6934 6935 6936 6937 6938 6939 6940 6941 6942 6943 6944 6945 6946 6947 6948 6949 6950 6951 6952 6953 6954 6955 6956 6957 6958 6959 6960 6961 6962 6963 6964 6965 6966 6967 6968 6969 6970 6971 6972 6973 6974 6975 6976 6977 6978 6979 6980 6981 6982 6983 6984 6985 6986 6987 6988 6989 6990 6991 6992 6993 6994 6995 6996 6997 6998 6999 7000 7001 7002 7003 7004 7005 7006 7007 7008 7009 7010 7011 7012 7013 7014 7015 7016 7017 7018 7019 7020 7021 7022 7023 7024 7025 7026 7027 7028 7029 7030 7031 7032 7033 7034 7035 7036 7037 7038 7039 7040 7041 7042 7043 7044 7045 7046 7047 7048 7049 7050 7051 7052 7053 7054 7055 7056 7057 7058 7059 7060 7061 7062 7063 7064 7065 7066 7067 7068 7069 7070 7071 7072 7073 7074 7075 7076 7077 7078 7079 7080 7081 7082 7083 7084 7085 7086 7087 7088 7089 7090 7091 7092 7093 7094 7095 7096 7097 7098 7099 7100 7101 7102 7103 7104 7105 7106 7107 7108 7109 7110 7111 7112 7113 7114 7115 7116 7117 7118 7119 7120 7121 7122 7123 7124 7125 7126 7127 7128 7129 7130 7131 7132 7133 7134 7135 7136 7137 7138 7139 7140 7141 7142 7143 7144 7145 7146 7147 7148 7149 7150 7151 7152 7153 7154 7155 7156 7157 7158 7159 7160 7161 7162 7163 7164 7165 7166 7167 7168 7169 7170 7171 7172 7173 7174 7175 7176 7177 7178 7179 7180 7181 7182 7183 7184 7185 7186 7187 7188 7189 7190 7191 7192 7193 7194 7195 7196 7197 7198 7199 7200 7201 7202 7203 7204 7205 7206 7207 7208 7209 7210 7211 7212 7213 7214 7215 7216 7217 7218 7219 7220 7221 7222 7223 7224 7225 7226 7227 7228 7229 7230 7231 7232 7233 7234 7235 7236 7237 7238 7239 7240 7241 7242 7243 7244 7245 7246 7247 7248 7249 7250 7251 7252 7253 7254 7255 7256 7257 7258 7259 7260 7261 7262 7263 7264 7265 7266 7267 7268 7269 7270 7271 7272 7273 7274 7275 7276 7277 7278 7279 7280 7281 7282 7283 7284 7285 7286 7287 7288 7289 7290 7291 7292 7293 7294 7295 7296 7297 7298 7299 7300 7301 7302 7303 7304 7305 7306 7307 7308 7309 7310 7311 7312 7313 7314 7315 7316 7317 7318 7319 7320 7321 7322 7323 7324 7325 7326 7327 7328 7329 7330 7331 7332 7333 7334 7335 7336 7337 7338 7339 7340 7341 7342 7343 7344 7345 7346 7347 7348 7349 7350 7351 7352 7353 7354 7355 7356 7357 7358 7359 7360 7361 7362 7363 7364 7365 7366 7367 7368 7369 7370 7371 7372 7373 7374 7375 7376 7377 7378 7379 7380 7381 7382 7383 7384 7385 7386 7387 7388 7389 7390 7391 7392 7393 7394 7395 7396 7397 7398 7399 7400 7401 7402 7403 7404 7405 7406 7407 7408 7409 7410 7411 7412 7413 7414 7415 7416 7417 7418 7419 7420 7421 7422 7423 7424 7425 7426 7427 7428 7429 7430 7431 7432 7433 7434 7435 7436 7437 7438 7439 7440 7441 7442 7443 7444 7445 7446 7447 7448 7449 7450 7451 7452 7453 7454 7455 7456 7457 7458 7459 7460 7461 7462 7463 7464 7465 7466 7467 7468 7469 7470 7471 7472 7473 7474 7475 7476 7477 7478 7479 7480 7481 7482 7483 7484 7485 7486 7487 7488 7489 7490 7491 7492 7493 7494 7495 7496 7497 7498 7499 7500 7501 7502 7503 7504 7505 7506 7507 7508 7509 7510 7511 7512 7513 7514 7515 7516 7517 7518 7519 7520 7521 7522 7523 7524 7525 7526 7527 7528 7529 7530 7531 7532 7533 7534 7535 7536 7537 7538 7539 7540 7541 7542 7543 7544 7545 7546 7547 7548 7549 7550 7551 7552 7553 7554 7555 7556 7557 7558 7559 7560 7561 7562 7563 7564 7565 7566 7567 7568 7569 7570 7571 7572 7573 7574 7575 7576 7577 7578 7579 7580 7581 7582 7583 7584 7585 7586 7587 7588 7589 7590 7591 7592 7593 7594 7595 7596 7597 7598 7599 7600 7601 7602 7603 7604 7605 7606 7607 7608 7609 7610 7611 7612 7613 7614 7615 7616 7617 7618 7619 7620 7621 7622 7623 7624 7625 7626 7627 7628 7629 7630 7631 7632 7633 7634 7635 7636 7637 7638 7639 7640 7641 7642 7643 7644 7645 7646 7647 7648 7649 7650 7651 7652 7653 7654 7655 7656 7657 7658 7659 7660 7661 7662 7663 7664 7665 7666 7667 7668 7669 7670 7671 7672 7673 7674 7675 7676 7677 7678 7679 7680 7681 7682 7683 7684 7685 7686 7687 7688 7689 7690 7691 7692 7693 7694 7695 7696 7697 7698 7699 7700 7701 7702 7703 7704 7705 7706 7707 7708 7709 7710 7711 7712 7713 7714 7715 7716 7717 7718 7719 7720 7721 7722 7723 7724 7725 7726 7727 7728 7729 7730 7731 7732 7733 7734 7735 7736 7737 7738 7739 7740 7741 7742 7743 7744 7745 7746 7747 7748 7749 7750 7751 7752 7753 7754 7755 7756 7757 7758 7759 7760 7761 7762 7763 7764 7765 7766 7767 7768 7769 7770 7771 7772 7773 7774 7775 7776 7777 7778 7779 7780 7781 7782 7783 7784 7785 7786 7787 7788 7789 7790 7791 7792 7793 7794 7795 7796 7797 7798 7799 7800 7801 7802 7803 7804 7805 7806 7807 7808 7809 7810 7811 7812 7813 7814 7815 7816 7817 7818 7819 7820 7821 7822 7823 7824 7825 7826 7827 7828 7829 7830 7831 7832 7833 7834 7835 7836 7837 7838 7839 7840 7841 7842 7843 7844 7845 7846 7847 7848 7849 7850 7851 7852 7853 7854 7855 7856 7857 7858 7859 7860 7861 7862 7863 7864 7865 7866 7867 7868 7869 7870 7871 7872 7873 7874 7875 7876 7877 7878 7879 7880 7881 7882 7883 7884 7885 7886 7887 7888 7889 7890 7891 7892 7893 7894 7895 7896 7897 7898 7899 7900 7901 7902 7903 7904 7905 7906 7907 7908 7909 7910 7911 7912 7913 7914 7915 7916 7917 7918 7919 7920 7921 7922 7923 7924 7925 7926 7927 7928 7929 7930 7931 7932 7933 7934 7935 7936 7937 7938 7939 7940 7941 7942 7943 7944 7945 7946 7947 7948 7949 7950 7951 7952 7953 7954 7955 7956 7957 7958 7959 7960 7961 7962 7963 7964 7965 7966 7967 7968 7969 7970 7971 7972 7973 7974 7975 7976 7977 7978 7979 7980 7981 7982 7983 7984 7985 7986 7987 7988 7989 7990 7991 7992 7993 7994 7995 7996 7997 7998 7999 8000 8001 8002 8003 8004 8005 8006 8007 8008 8009 8010 8011 8012 8013 8014 8015 8016 8017 8018 8019 8020 8021 8022 8023 8024 8025 8026 8027 8028 8029 8030 8031 8032 8033 8034 8035 8036 8037 8038 8039 8040 8041 8042 8043 8044 8045 8046 8047 8048 8049 8050 8051 8052 8053 8054 8055 8056 8057 8058 8059 8060 8061 8062 8063 8064 8065 8066 8067 8068 8069 8070 8071 8072 8073 8074 8075 8076 8077 8078 8079 8080 8081 8082 8083 8084 8085 8086 8087 8088 8089 8090 8091 8092 8093 8094 8095 8096 8097 8098 8099 8100 8101 8102 8103 8104 8105 8106 8107 8108 8109 8110 8111 8112 8113 8114 8115 8116 8117 8118 8119 8120 8121 8122 8123 8124 8125 8126 8127 8128 8129 8130 8131 8132 8133 8134 8135 8136 8137 8138 8139 8140 8141 8142 8143 8144 8145 8146 8147 8148 8149 8150 8151 8152 8153 8154 8155 8156 8157 8158 8159 8160 8161 8162 8163 8164 8165 8166 8167 8168 8169 8170 8171 8172 8173 8174 8175 8176 8177 8178 8179 8180 8181 8182 8183 8184 8185 8186 8187 8188 8189 8190 8191 8192 8193 8194 8195 8196 8197 8198 8199 8200 8201 8202 8203 8204 8205 8206 8207 8208 8209 8210 8211 8212 8213 8214 8215 8216 8217 8218 8219 8220 8221 8222 8223 8224 8225 8226 8227 8228 8229 8230 8231 8232 8233 8234 8235 8236 8237 8238 8239 8240 8241 8242 8243 8244 8245 8246 8247 8248 8249 8250 8251 8252 8253 8254 8255 8256 8257 8258 8259 8260 8261 8262 8263 8264 8265 8266 8267 8268 8269 8270 8271 8272 8273 8274 8275 8276 8277 8278 8279 8280 8281 8282 8283 8284 8285 8286 8287 8288 8289 8290 8291 8292 8293 8294 8295 8296 8297 8298 8299 8300 8301 8302 8303 8304 8305 8306 8307 830

Needless to say, all the arrangements for cooling the electric machine 2 are independent of the fact that the torsion damper 20a does or does not penetrate into the central recess of the reaction plate 4.

5 In a general way, many characteristics described in the present application are independent of the fact that the torsion damper 20a does or does not penetrate into the central recess of the reaction plate 4. The same goes, for example, for the presence of the carrier
10 piece 134, of the bearing means 132, of the various sensors, of the means of clearance for the chignons, of the balancing means or of the machine type of the electric machine, etc.

Needless to say, in a variant, the torsion
15 damper 20a may penetrate entirely into the central recess 39 in order further to reduce the axial bulk of the assembly 1.

Thus, in the embodiment of Figure 16, an axial offset exists between the outer 121 and inner 122 per-
20 ripheries of the support 21. More precisely, the inner periphery 122 of the support 21 is offset axially with respect to the outer periphery 121 of the support 21 in a direction opposite to the friction face 37, that is to say towards the fixing screws 45. To that end, a
25 bend 123 links together the peripheries 121, 122. The inner periphery 122 is fixed by the use of distance rods 31 onto the first guide washer 29, which thus penetrates into the central recess 39 in order to re-
duce the axial bulk between the friction face 37 and
30 the back of the casing 14. The guide washers 29, 30 therefore penetrate within the first portion of axial orientation 38, while a shoulder 141 links the trans-
verse shoulder 41 to the second annular portion of ax-
ial orientation 42 of the recess 39. The chamfer 141 is
35 a clearance chamfer which avoids interference between the distance rods 31 and the shoulder 41, which makes it possible to reduce the axial bulk without profoundly altering the flywheel 13. The torsion damper 20a is

identical to that of Figure 1 and is of the type described in the document WO-96/14521 (Figure 8). It thus features a bearing 124 featuring notches for accommodating springs 36 of low stiffness also mounted in notches produced in the hub 15 splined internally for rotational linking with the driven shaft 12. The springs 36 belong to a pre-damper installed between the second guide washer 30 and the web 34 featuring, at its inner periphery, a female toothing for meshing, with circumferential clearance, with a male toothing present on the hub 15 at its outer periphery. Friction washers and washers with axial elasticity act between the first guide washer 29 and the web 34. The pieces 30, 34, 29 are equipped with windows for mounting elastic elements 35 of higher stiffness than the springs 36. The elastic elements 35 thus belong to the main damper. For further details, refer to the abovementioned document, knowing that the bearing 124, here of frustoconical shape, as in Figure 1, penetrates more deeply within the recess 39 and that this bearing 24 is linked in rotation, here by the use of pins, to the web 34. Here the fingers 22 of the diaphragm 18, 22 feature, at their inner periphery, a portion 125 offset axially with respect to the Belleville washer 18 of the diaphragm 18, 24 in such a way that it is possible to reduce the axial bulk, the declutching release bearing 23 penetrating under the main part of the fingers of the diaphragm, given that the portion 125 is connected to the main part of the fingers 22 by a S-shaped segment 126. The release bearing 23 therefore extends under the portion 126, given that the main part of the fingers 22 extends in the same plane as the Belleville washer 18. The creation of the portion 125 is achieved by virtue of the fact that the damper 20a penetrates more deeply into the central recess, the portion 125 being more offset axially in the direction of the damper 20a without interfering with it when the clutch is disengaged as can be seen in the upper part of Figure 16. Thus the axial bulk of the

assembly 1 is further reduced by here having a de-clutching device 24 of the hydraulic type as in Figure 3. In this Figure 16 can be seen, at 127, a rigid supply duct for connecting the supply inlet 128 of the cavity 243 to a sender driving the declutching device 24 of the concentric type since it is traversed by the driven shaft 12. The duct is L-shaped and is in two parts, extending on either side of a passage 129 formed in the clutch bell housing 14. More precisely, the duct 127 comprises an internal part extending transversely within the bell housing 14 so as to come into engagement with the head of the internal-channel supply inlet 128 for linking with the cavity 243 and an external part extending outside the bell housing 14, perpendicularly to the internal part. For further details, refer to the document FR 2,753,772 filed on 26-09-1996. The external, axially oriented part features a union for connecting it to a hose originating from the sender, not visible. By virtue of the rigid duct 127, it is also possible to reduce the axial bulk due to the fact that it is easier to mount the rigid duct 127 onto the supply inlet 128 in advance while subsequently having no risk of interference between the rigid duct 127 and the cover 19 which can thus be very close to one another. This arrangement also facilitates rapid connecting of the sender to the declutching device 24 because the connection of the hose, coming from the sender, is made outside the bell housing 14. Needless to say, the duct 127 may equip the declutching device 24 of Figure 3.

As can be seen in Figure 17, the back of the bell housing 14 may be shaped in order locally to create a clearing 150 for the internal part of the rigid tube 127 to pass through, such that the axial space required between the back of the cover 19 and the back of the bell housing 14 is further reduced, which also makes it possible to reduce the axial bulk of the assembly 1. In this case, the supply inlet 128 of the

cavity 243 features a less inclined channel than that of Figure 16. The rest of the declutching device is identical to that of Figure 16 and the same is true for the diaphragm 18, 22. It will be noted, nevertheless, that the S-shaped segment 126 is less accentuated. In this Figure 17, the clutch 3 is equipped with a device called wear-take-up device 151 for compensating for the wear on the friction linings 16 and, to a lesser extent, the wear on the friction face 37 and the wear on the friction [sic] opposite the pressure plate 17. This wear-take-up device, in a known way, makes it possible to hold the diaphragm 18, 22 in the same position when the clutch 3 is engaged, for the lifetime of the clutch. The travel of the declutching device 24 is therefore constant all through the lifetime of the clutch, which makes it possible to reduce the axial bulk of the clutch 3, and therefore the axial bulk between the friction face 37 and the back of the clutch bell housing 14. In clutch-engaged position, the load exerted by the diaphragm 18, 22 on the friction linings 16 is therefore substantially constant throughout the lifetime of the clutch. Hence, the support 21 may be flat. Here, the wear-take-up device is of the type described in the document FR 2,753,503 which should be referred to for further details. This wear-take-up device therefore includes a cartridge carried by the cover 19 featuring a worm-screw and ratchet-wheel assembly 152. This assembly 152 is installed thanks to a local deformation 153, U-shaped overall, present on the cover 19 at its outer periphery. The worm screw meshes irreversibly with a toothing carried by an intermediate piece 154 linked in rotation by tabs 155, of the same type as the tabs 25, to an inclined ring 156, the said inclined ring being centred by the pressure plate 17 and featuring a fragmented bead (not referenced) for contact with the outer periphery of the Belleville washer of the diaphragm 18, 24 mounted so as to pivot on the cover 19 by the use of lugs 28 as in Figure 1.

The pressure plate 17 features studs forming counter-inclines for co-operating with the inclines of the inclined ring 156. The intermediate piece 154 is keyed axially in one direction by projections, not visible, integral with the cover. In the other axial direction, the intermediate piece 154 is keyed axially by virtue of the tabs 155. The cartridge features a control tab 157 able to be manoeuvred by an actuator 158 consisting of a radial appendage which the Belleville washer 18 features at its outer periphery. The cartridge also features a take-up spring of the coil-spring type acting on the assembly 152. In the event of wear on the friction linings 16, the take-up spring is tensioned, and the spring, after a certain number of declutching and clutching operations, is made, in relaxing, to shift the worm screw and to turn the intermediate-piece 154/inclined-ring 156 assembly, in order to compensate for the wear on the friction linings. The arming of the wear-take-up spring is achieved by virtue of the control tab 157 manoeuvred by the appendage 158. For further details on the operation refer to the abovementioned document FR 2,753,503, remembering that the inclined ring 156 may, in a variant, be of a single piece with the intermediate piece 154 such that the presence of the tabs 155 is not mandatory.

In Figures 16 to 18, blind holes are seen at 170, produced in the sleeve 46, at 171, notches open radially outwards produced in the reaction plate 4 and, at 172, additions of material formed in the reaction plate 4 in order, as mentioned above, to correct for the out-of-balance of the heat engine, especially for a vehicle with a three-cylinder engine. It will be noted that the notches 171 may be formed on the two faces of the reaction plate as can be seen better in Figure 19. The notches 171 are preferably formed at the outer periphery of the reaction plate in order to be as effective as possible. The material 172 is added in projection on the face of the reaction plate 4, the said face

being turned towards the cover 19. In Figure 18, the horizontal x, vertical y and longitudinal z axes have been marked in order better to show the orientation of the figure. The addition of material 172 is preferably carried out in the region of the tangential tabs 25 linking the lugs 173 of the pressure plate 17 to the cover 19. These tabs 25, distributed into several sets of tabs, here superimposed, have one of their extremities fixed, here by riveting, to a lug 173 of the pressure plate and have their other extremity fixed by riveting to a region 174 belonging to the radial rim 175 which the cover 19 features at its outer periphery, here in the overall shape of a hollow dish. The regions 174 are offset axially with respect to fixing regions 176 which the rim 175 features for fixing the cover 19 to the reaction plate 4 here, in a known way, by the use of screws, not visible. Hence, the additional material 172 features an inclined face, parallel overall to the tabs 25 and extends circumferentially between a lug 173 and a region 174 as can be seen better in Figures 17 and 19. Thus, the additional material 172 may be a maximum without increasing the axial bulk of the assembly 1. The addition of material 172 is masked by the regions 174 and carried out at the outer periphery of the reaction plate 4 which is very effective. It is thus possible to use every possible combination so that the machine and the heat engine rotate under good conditions. As will have been understood, the out-of-balance in the region of the flywheel 13 makes it possible to balance the rotation of the heat engine. By virtue of the holes 170, the notches 171 and the additions of material 172, the out-of-balance of the crankshaft of the heat engine is counteracted. Needless to say, all possible combinations can be used. It is thus possible to balance the flywheel 13 by the use of holes 170, notches 171, then, the out-of-balance of the crankshaft of the engine can be counteracted by the use of additions of material 172 or, in a variant, as can

be seen in Figures 25 and 26, by forming apertures 177 for example in the sleeve 46 of the flywheel 13. These apertures 177 may be kidney shaped in order to remove the maximum amount of material. It is therefore possible, at will, to carry out functions of balancing of the assembly 13 as well as a function to counteract the out-of-balance of the crankshaft of the engine. Needless to say, it is also possible to remove material from the pressure plate.

Needless to say, the spacer 61 of Figure 1 may be of a single piece with the stator 5 which makes it possible to avoid hooping of the metal plates 10 of the stator 5 in the spacer 61 conventionally of aluminium for weight reduction. It is not therefore necessary to provide means to prevent rotation of the metal plates 10 with respect to the spacer 61, especially when the metal plates 10 are fixed by hooping onto the spacer 61. Moreover, the process of machining of the through-holes for the fixing screws 64 and for the centring holes is simplified by virtue of the fact that the spacer is of a single piece with the pack of metal plate [sic] 10.

Equally, the piercings of Figures 7 and 8 are easier to produce since there is more material, such that the mechanical behaviour of the stator is better.

Hence, in Figure 21, the stator 5 consists of a pack of magnetic metal plates consisting respectively of a first series of standard metal plates 180 and of a second series of spacer metal plates 181 of different outer diameter. These metal plates, here magnetic, have the same configuration at their inner periphery and therefore exhibits [sic] notches 182 dedicated to accommodating the stator winding. The notches 182 of each of the metal plates are aligned in such a way as to constitute axial grooves for accommodating the winding of the stator. The first series of metal plates is of cylindrical shape at its outer periphery. The second series of metal plates 181, acting as a spacer, extends

radially projecting above the outer periphery of the first series of metal plates in order to form cooling fins 183 some of which are holed at 184 for fixing screws to pass through, represented at 64 in Figure 1, making it possible to fix the clutch bell housing 14 onto the engine block 62. Two diametrically opposite holes 185 are formed in some of the fins in order for centring pins carried by the engine block 62 to pass through. These centring holes 185 also make it possible, on mounting, to index the spacer metal plates of the second series 181 with respect to one another. Holes can be seen at 186 allowing mounting of the connector or terminal board referenced at 63 in Figure 1. Such a connector 63 can be seen better in Figure 25.

The fins 183 are segmented into several annular sectors separated from one another by grooves 187 the bottom of which will accommodate the weld beads 188. An isolated lug can be seen at 189, provided with an aperture 184. The said lug 189 is due to the configuration of the engine block and makes it possible to reach a remote fixing point. In a general way, the shape of the second series of metal plates 181 depends on the applications, and especially on the shape of the engine block and of the clutch bell housing. The second series of metal plates 181 does not necessarily include fins, especially when the fluid-circulation piercing [sic] of Figures 6 and 7 are produced in it. In one embodiment, the first series of metal plates 180 extends axially on either side of the second series of metal plates 181 symmetrically or not symmetrically depending on the applications. In a variant, the first series of metal plates 180 extends on a single side of the second series of metal plates 181 depending on the applications. In all cases, the metal plates of the first series 181 have a standard shape and communicate with the grooves 187. Hence, by the use of weld beads 188, it is possible to link together the first and second series of metal plates. The weld bead 188 extending [sic] over

the entire total axial length of the series of metal plates. In a variant, the weld beads 188 are replaced by a shape-interlocking link such as a buttoning. In a variant, the standard metal plates may be of different diameter on either side of the second series of metal plates 181 in such a way that two series of standard metal plates are provided. As will be understood, the welding operation is easy to carry out by virtue of the notches 182. It suffices, on assembly, to pile the metal plates on a centring device equipped with at least one longitudinal axial strip onto which is threaded a notch of each of the metal plates. Hence, by virtue of this arrangement, welding with the use of the beads 188 is easy to carry out since the metal plates have identical notches 182 and are indexed in angle with respect to one another. The number of beads 188 depends on the applications, this number possibly being less than or equal to the number of grooves 187. By virtue of the second series of metal plates 181, forming fins 183, better heat removal is obtained by comparison with a spacer equipped with fins and separate from the metal plates of the stator 5, since the thermal conduction is better because of the absence of stator-spacer separation, which separation creates a thermal resistance. Moreover, as the spacer consists of metal plates 181, here ferromagnetic, there is an increase in the average value of the thickness of the magnetic stator yoke. Furthermore, a saving in mass is obtained since, although the magnetic metal plates have a density greater than that of aluminium, the volume of the one-piece stator/spacer assembly is less than that of a stator separate from the spacer since the fins can come as close as possible to the metal plates of the stator because of the fact that the bearing surface for hooping the metal plates of the stator has been dispensed with. There is, moreover, the possibility of cooling the stator as well as its chignons and of low-

ering the temperature within the electric machine by blown fresh air and/or absorbed hot air.

Needless to say, fins and a circulation of cooling fluid can be provided, as in Figures 7 and 8.

5 With this one-piece device, the problems of machining are simplified and reduced and the manufacturing tolerances are reduced. It is also possible to vary the depth of the notches 182 without impairing the performance of the electric machine. This confers the advantage of facilitating automatic winding while reducing the height of the chignons. The thickness of the spacer can be altered.

As can be seen in Figures 22 and 23, recesses 191 with a contour 192 make it possible to match the contours 192 of the ribs of the cylinder casing as well as of the oil sump of the engine block referenced at 62 in Figures 1, 12 and 13 and in the lower part of Figure 22. The projections 194 of the engine block 62 penetrate into the recesses, the shape of which depends on the applications. This geometry makes it possible to limit the axial bulk of the electric machine 2 and, at the very least, to stay within the same axial bulk as an electric machine mounted cantilevered as represented, for example, in Figure 1 or in Figure 16, in such a way that it is possible to increase the size of the electric machine and/or of the clutch.

These recesses 191 are produced in a radial carrying flange 193 which replaces the carrier piece 134 of Figure 6. To do this, this flange 193 features a skirt 190 for the bearing means and is of a piece with the spacer 61 which internally carries the stator 5. This spacer 61 could be water-cooled (as represented, for example, in Figure 13) or air-cooled. Here, the spacer features fins 183 with holes 184 to 186 as in Figure 21, but the fins here are of a single piece with the flange 193, in a tortuous shape, with a semi-toroidal portion 195 in order to create a housing for the rotor 6, the stator 5 and the sleeve 46. The fins

183 are connected to the outer periphery of this portion 195 the inner periphery of which is connected to a ribbed web 196 carrying the bush 432 and featuring the piercings 545.

5 This radial flange 193, at its centre, carries the bearing means 132 centred axially on the X-X axis of the electric machine 2 and of the same type as that of Figure 6. These bearing means 132 include at least one ball bearing 132 and can be mounted on the flange
10 in two different ways.

 According to a first embodiment, the outer ring of this bearing 132 is simply fitted, not clamped, into the bush 432 so as to take up the tolerance gaps, while the inner ring is mounted clamped, for example by hoop-
15 ing, onto the shaft 430 with a splined front end so as to come into engagement with internal splines of the fixing pedestal 431 fixed by the screws 345 to the crankshaft of the engine.

 In a second embodiment, the two outer and inner
20 rings of the bearing 132 are mounted clamped, for example by hooping, respectively on the bush 432 and on the shaft 430. The centring of the electric machine 2 is carried out in the region of the bearings 132 which then act as a centring device and, consequently, the
25 spacer 61 no longer carries out this centring function. Needless to say, in this second method of clamped fixing of the bearings, it is necessary, in order to avoid over-stiffness, for the fixing elements 64, as represented in Figure 1, to be able to pass freely through
30 the fixing holes 184 of the spacer 61 thus allowing positioning of the gearbox with respect to the engine block.

 This configuration allows better control of the gap.

35 The removal of the heat energy from the bearing means 132 will be carried out very advantageously by conduction by the flange 193 which forms a unit with

the said bearings, as well as by the holes 545 acting as ventilation holes.

Needless to say, in another embodiment, the bearings 132 may be replaced by a smooth bearing such as a self-lubricating journal or by a bearing with a double row of balls or by a bearing with a single row of balls or by a needle bearing.

As will easily be understood, this spacer carrying the bearing means 132 makes it possible, by comparison with cantilever-mounted machines, as represented, for example, in Figure 1, significantly to reduce the range of dynamic movement set up by the crankshaft, thus enhancing control of the gap 7.

As will easily be understood, the radial flange 193, forming a single piece with the spacer 61, makes it possible to stiffen the latter.

Advantageously, this spacer consisting of the flange 193 carrying the bearing means 132 makes it possible to close off the hole left free by the absence of the conventional starter.

As can be seen in Figure 23, because of the tortuous shape of the flange, the rotor 6 and the stator 5 can be axially longer by comparison with the embodiment of Figure 6.

The back of the portion 195 serves as support for a detection means 610 such as a speed or position sensor.

This detection means 610 is opposite a target 601, also called coder wheel. This target is ring-shaped, featuring, at its periphery, a multiplicity of radial lugs 602 intended to cross in front of the detection means 610. The target is carried here by the non-magnetic overmoulded ring forming a squirrel cage, made of copper, of the rotor 6. In order to reduce the axial bulk, the squirrel cage features an inclined face 603 carrying the lugs 602 of the coder wheel 601. The inclination of the face 603 may vary from 0 to 45° with respect to a plane transversal to the machine.

Hence, the sensor 610 and the coder wheel are not parallel to the X-X axis of the electric machine 2, which makes it possible to reduce the axial length thereof. In the case of a squirrel-cage asynchronous machine, there is therefore a detection means present in the form of a speed sensor. The coder wheel is carried by a non-magnetic support. In a variant, the support of the coder wheel is the flange of a fan of the rotor 6. Needless to say, the coder wheel may be replaced by a film of ferromagnetic paint lying between 5/100 mm and 1 mm deposited by printing or sprayed through a mask. In a variant, the coder wheel may consist of an adhesive magnetic film with notches. In a variant, a resin plug with a dust paste can be used, in such a way that, on passing through a furnace, polymerisation of the resin will occur, fixing the dust. In all cases, the support of the coder wheel is non-magnetic. Needless to say, this coder wheel may be carried by the fixing bush 43 of Figure 1 as can be seen in Figures 24 and 25. The sensor is then carried by a flange 611 fixed to the housing 604 of the connector 63. This housing 604, in its upper part, carries a support 605 of three electrical connection terminals 606, 607 and 608 allowing three phase wires coming from the stator to be connected with the outside. Obviously, a fourth connection terminal, not represented here, may be added in order to take out the neutral point coming from the stator. These terminals allow connection to power electronics.

The sleeve 46 is provided with a hole 177 described above.

Needless to say, the cooling circuit of the spacer 61 may be entirely independent and, especially, independent of the cooling circuit of the internal-combustion engine. This independence makes it possible to get round problems of connection to the cooling circuit of the internal-combustion engine, and also to have a cooling temperature which is not dependent on

that of the heat engine, which is of benefit each time the vehicle is started up.

As will be understood, the torsion damper 20a can be turned round, the second guide washer then no longer penetrating into the recess 39, especially in the embodiments of Figures 16 and 17, making it possible to reduce the axial bulk.

In Figure 26, the spacer 61 is provided with cooling fins 183. Screws can be seen at 160 and at 161, fitted into the thickness behind the outer surface, for mounting the rotor 5 on the bearing surface 47 and the stator 6 on the inner periphery of the spacer 61, in the abovementioned way. The torsion damper 20a penetrates inside the recess 39 identical to that of Figure 1. The engine block 62 is represented in a more detailed way than in Figure 1. For simplicity, the declutching fork and the declutching release bearing have not been represented in this figure, nor has the driven shaft 12, in order better to show the hub 15 and the guide tube 52. The same is true in Figure 27.

In this Figure 27, the reaction plate 4 features, at its outer periphery, radially above the friction linings 16, a portion 49 offset axially in the opposite direction to the stator 6, with respect to the transverse part of the reaction plate 4. The portion 49 extends radially above the friction linings 16. On the face of this portion 49, turned towards the stator 6, ventilation fins 1202 are formed, in the form of fan blades. These blades 1202 extend partly radially above the chignons 8. Thus ventilation of centrifugal type is achieved.

A clearing 65 is formed in the engine block 62. This clearing 65 may correspond to the old location of a separate starter of conventional type. As can be seen in this figure, the fins 1202 extend radially above the gap 7 and the same is true of the portion 49. At least one aperture 1204 is produced in the bell housing 14 radially above the fins.

In Figure 28, the aperture 1204 is dispensed with to be replaced by the through aperture 1205 of the declutching fork. The fins or blades 1202 are of radial orientation or propeller-shaped. Air enters at the clearing 65 on the engine block 62 side. Air leaves either through the aperture 1204 of Figure 27, or through the aperture 1205 of Figure 28. Air circulates via the gap 7. By virtue of the fins 1202, integral with the reaction plate 4, a fan is created making it possible to draw in air through the electric machine 2 and to eject this air radially, creating a depression at its centre. Depending on the shape of the fins, the fan 4, 1202, is either of the centrifugal and/or helicocentrifugal type. This fan is dimensioned to have a good thermal and acoustic compromise. The same is true in Figure 5. This ventilation makes it possible to cool the rotor and the stator by virtue of the gap 7, the chignons 8, as well as the reaction plate 4 and therefore the friction linings 16 which increases the reliability of the clutch 3. The outlet is at the reaction plate 4 in Figure 27 or beyond the clutch 3 (Figure 28) so as to expel the dust originating especially from the friction linings 16. In all cases, ventilation is created without modifying the spacer 61 which in this figure is made of aluminium. The engine block is modified to form the clearing 65. In Figure 27, the bell housing 14 is modified to create at least one aperture 1204, advantageously several apertures. The result of this is that this arrangement is economical since it leads to the clutch bell housing 14 and the engine block 62 not being profoundly modified. Moreover, this makes it possible to use fitting by hooping of the pack of metal plates of the stator 6 on the spacer 61.

In a variant, as represented in Figure 29, fins or fan blades 1206 are carried by the rotor 5 at at least one of its axial ends. Here, fins 1206 are provided on each axial extremity of the rotor 5. In this embodiment, the fins 1206 are integral with the squir-

rel cage. An air inlet 1208 and an air outlet 1207, of tubular shape, are carried locally by the spacer 61. The inlet 1208 is situated in the lower part of the spacer 61 and the outlet 1207 in the higher part of the spacer, such that, by virtue of the fins 1206, ventilation of tangential type is created within the electric machine 2, the air penetrating into the duct 1208 so as to emerge through the duct 1207. Needless to say, the presence of the fins 1206 is not vital, ventilation possibly taking place naturally between the inlet 1208 and the outlet 1207. This type of ventilation is less noisy.

Needless to say, it is possible to fit, in the air inlet 1208, in the form of a duct like the outlet 1207 overall, a motor-driven fan unit shown diagrammatically at 1209, allowing forced air circulation between the inlet 1208 and the outlet 1207. This method of ventilation makes less noise at high speed and allows the ventilation to be stopped on demand. By virtue of the motor-driven fan unit 1209, performance is good in terms of throughput, and the ventilation makes it possible to withstand heavy losses of pressure head. Needless to say, another motor-driven fan unit can be placed in the outlet duct 1207, either in supplement to the one placed at the inlet, or on its own. By motor-driven fan unit 1209 is understood here an electric motor assembly driving a turbine disc. This assembly is fixed within the duct or ducts constituting the inlet 1208 and the outlet 1207.

Advantageously, a temperature sensor is placed in the vicinity of the reaction plate or of the chignons 8, being carried, for example, by the bell housing 14. This sensor controls the turning-on of the electric motor, and thus of the turbine as a function of temperature in order to create the forced ventilation via a channel delimited axially by the engine block 62 and by the reaction plate 4 and, radially, by

the spacer 61, the bell housing 14 and a crown ring 1210 of the engine block 62.

Needless to say, it is evident from this Figure 29, that it is possible not to modify the engine block 62 and the bell housing 14, only the spacer 62 being modified.

In this Figure 29, the spacer 61 advantageously having [sic] the shape of the finned spacer of Figure 21 and thus includes a pack of magnetic metal plates consisting of a first series of standard metal plates and of a second series of spacer metal plates of different outer diameter, these metal plates having the same configuration at their inner periphery.

The shape of the duct 1207 or 1208 can be seen in Figure 30. Each duct 1207, 1208 including two half-casings. Thus, in Figure 30, the duct 1207 is seen formed from two half-casings 1207a, 1207b assembled together by the use of pins 1207c, each pin 1207c being inserted into a corresponding associated hole 1207d formed in the other casing. The end of each casing features a half-base 1207e, each half-base includes two holes 1207g for fixing the motor-driven fan unit, for example by the use of screws or of rivets.

Figure 31 shows this duct after the two half-casings have been locked together.

Needless to say, the ducts may have a different shape as can be seen in Figures 32 and 33. The two half-casings 1207a and 1207b being [sic] linked together by a thin hinge 1112 made of synthetic material, like the casings 1207a, 1207b. The pins 1207c are carried by the half-casing 1207a and the holes 1207d by the half-casing 1207b. Each half-casing features an upper part 1213, here bent at at least 90 degrees, of rounded shape, the free extremity of which terminates in a grille 1211. After the two half-casings have been closed, a complete grille is formed serving especially to avoid penetration by external agents. The motor-

driven fan unit is housed, for example, in the cavity 1214 formed in the lower part of each casing.

The spacer 61/inlet 1208/outlet 1207 configuration is seen diagrammatically in Figure 34. There is no
5 need of screws to hold the air inlet and outlet ducts, since the said ducts 1208, 1207 are held sunk into the fins 183 and held pinched between the engine block and the clutch bell housing.

The mounting of the spacer 61 with its inlet
10 1208 and its outlet 1207 within the rotating electric machine, between the engine block 62 and the clutch bell housing 14, can be seen in Figure 35.

Thus a configuration is created allowing forced ventilation without affecting the engine block 62 and
15 also without affecting the bell housing 14. The air inlet 1208 and the air outlet 1207 are therefore formed in the thickness of the spacer 62. From the performance point of view, it is desirable to have an outer diameter of the stator which is as high as possible. By virtue of the spacer of Figure 31, an outer diameter of
20 the stator is obtained which is as high as possible while having good mechanical behaviour of the spacer by virtue of the fact that it consists of two series of metal plates, namely a first series of standard metal
25 plates 180 for forming the stator proper and a second series of metal plates 181 of different external diameter. It suffices to remove fins locally from the second series of metal plates 181 to accommodate the inlet 1208 and the outlet 1207.

30 The fresh air will thus lap the stator and the chignons.

As will have been understood, the inlet 1208 and the outlet 1207 of Figures 34 and 35 are oriented perpendicularly to the direction of movement of the vehicle.
35 cle.

Needless to say, it is possible to orient the parts 1213 in such a way that the grilles 1211 are oriented in the direction of movement of the vehicle. In

this case, a filter is provided within the grille 1211 in order to prevent penetration by impurities, by dirt or other into the electric machine 2. This arrangement enhances the cooling of the machine in the case where
5 it does not include a motor-driven fan.

Needless to say, as can be seen in Figure 36, the inlet [sic] 1208 and 1207 are not necessarily diametrically opposite as in the preceding figures. For example, the inlet 1208 may be installed in proximity
10 to the motor-driven fan unit associated with the cooling of the heat engine of the vehicle. The inlet 1208 is therefore remote from the contamination coming from the road and it is well ventilated.

In the light of Figure 36, it is seen that, by
15 orienting the inlet 1208 and the outlet 1207 overall at 90 degrees with respect to one another, it is possible to create ventilation of the tangential type.

The inlet and the outlet are chosen so as to limit the vortex-field regions which are not cooled.
20 The inlet can be directed towards the outlet in order to obtain an amplification effect. In order to avoid non-cooled vortex regions, tangential ventilation on two levels can be envisaged, the air inlets and outlets being placed side by side while being offset axially
25 with respect to one another. It will be appreciated that it is advantageous for the inlet 1208 to be placed facing the motor-driven fan unit of the vehicle since, in the event of overheating of the heat engine, the motor-driven fan unit is turned on, which corresponds to
30 the requirement for cooling the alternator/starter. This motor-driven fan unit of the vehicle is turned on by a thermostat placed in the vehicle cooling circuit. This thermostat can be used to control the turning-on of a turbine fan assembly placed in the air inlet
35 and/or outlet 1207, 1208.

In the case of ventilation with fins placed on the flywheel 13 or on the rotor 5 in the abovementioned way, it is necessary to optimise the parameters for a

09744260 024460

good compromise between noise and the effectiveness of the ventilation. Hence, it is necessary to influence the dimension of the fins (height, width), the type of fins (convex, straight, concave), to reduce the outer diameter to the minimum necessary, to influence the number of fins and possibly the asymmetric angular distribution of the fins. These fins can be obtained as raw castings, result from overmoulding or be fixed by bonding, welding, screwing, hooping, etc.

Needless to say, with a spacer serving for fixing of the stator by hooping, it is possible to achieve ventilation thanks to apertures formed in local protuberances or bulges in the spacer. These apertures do not jeopardise the mechanical behaviour of the spacer.

In Figure 23 can be seen a pin, at 201, engaged in a centring hole 185 of the spacer 61, and, at 202, a centring bush also engaged in the same hole 185. The pin 201 is integral with the engine block 62 while the centring bush 202 is integral with the clutch bell housing 14, also called clutch casing. By virtue of the bearing means 132, the relative movements between the rotor 6 and the stator 5 are limited, which guarantees a precise gap. Nevertheless, because of the presence of the pins 201 and of the bushes 202, radial static forces persist because of the axial misalignment of the engine block with respect to the nose of the crankshaft.

Moreover, the fact of pressing the spacer 61 against the engine block 62 entails axial static forces.

It is proposed to minimise these static forces. In order to minimise the static radial forces, the pins 201 of Figure 23 are dispensed with and the bushes 202 are retained. Rotation is prevented by the through screws 64.

The axial static forces are minimised by the use of rings 1462 on which the spacer 61 may slide. The

length dictated between the engine casing 62 and the clutch casing is dictated by these centring rings 1462.

Hence, the fixing elements 64, in the form of screws, pass through the spacer 61 (Figure 37) and link
5 the engine block 62 to the clutch bell housing 14 shouldered at its free end for the heads of the fixing screws to bear on. These screws pass through the centring rings 1462, themselves passing through a passage 461 of the spacer. These rings 1463 are longer axially
10 than the spacer 61, that is to say that they extend in axial projection out of the spacer 61 and therefore form a spacer or separating element between the engine block 62 and the clutch bell housing 14. Rings made of elastic material 1463, such as elastomer, are placed at
15 each end of the spacer. The spacer 61 can thus slide axially along the rings 1462 in such a way that the static forces are minimised.

Needless to say, as can be seen at the top of Figure 37 and in Figure 38, the fixing elements 64 may
20 consist of bolts, the engine block then being shouldered, as can be seen in the top part of Figure 37. The ring 1462 then being [sic] extended at 1464 in order to form a centring pin for the bell housing 14.

Needless to say, the casing 14 includes at least
25 one stepped hole 1465 for accommodating respectively the pin 1464 and the head of the screw of the bolt. Needless to say, the number of pins 1464 depends on the application and, in practice, a reduced number of rings 1462 is equipped with such pins 1464. These rings 1462,
30 forming a spacer, are made of rigid material, such as steel, for example. The spacer 61, at each of the axial extremities of a passage 461, features a widening in diameter for accommodating the elastic ring 1463. The rings 1463 are therefore carried by the spacer.

35 In a variant, the engine block 62 and the bell housing 14 are hollowed locally in order to accommodate elastic rings 1463. These rings may be linked together to form a crown ring and thus to create leaktightness.

In a variant, these elastic rings are mounted individually around a centring ring 1462.

In a variant (Figure 38), the centring pins 1467 are separate from the ring 1462. These pins 1467 consist of bushes engaged on the heads of the screws of the bolts and are each individually engaged in a stepped hole 1465 of the bell housing 14 and in a countersink 1466 formed in the ring 1462. This countersink 1466 is, needless to say, face-to-face with the hole 1465 and is formed by virtue of a widening in the internal diameter of the ring 1462 at its free extremity in question. The rings 1462 make it possible to filter vibration.

Thus the centring, on the cylinder casing side, takes place via the bearing means 132, centring on the gearbox side by pins 1464 or 1467, and the axial forces are compensated for by the degree of axial freedom which the centring rings 1462 procure.

Needless to say, the blind holes 170 of Figure 17 can be linked to vertical channels opening out at the outer periphery of the spacer 46 in order to allow easy separation of the holes 170 and the mould.

Needless to say, the air inlets and outlets 1208 [sic], 1208 may consist of holes when the spacer is very thick.

As emerges from the description and from the figures, the central recess 39 allows access to the heads of the screws for fixing the drive flywheel 13 onto the output shaft 11 (crankshaft) of the heat engine of the vehicle.

In the figures, the spacer 61 is shorter axially than the flywheel 13.

The carrier piece, for example, the flange 193 has a hollow shape in order partly to accommodate the stator and the rotor.

This carrier piece may, at its inner periphery, carry the stator, the rotor, carried by the flywheel

13, then surrounding the stator. It is thus possible to reverse the structures in Figure 12.

The torsion damper may not penetrate into the central recess.

5 Needless to say, the rotors of Figures 1 and the following figures may be provided with at least one series of fins 1206. The flywheel 13 of these figures may be provided with fins and/or with holes as in Figures 5 and 27. This type of cooling may be combined with that
10 of Figures 13, 14. All combinations are possible.

Receivable

CLAIMS

1. Friction clutch device including, on the one
5 hand, a rotational drive flywheel (13) featuring a
front extremity intended to be fixed to a drive shaft
(11), and a rear extremity in the form of a hollow-
shaped reaction plate (4) with a central recess (39)
delimited externally by a friction face (37), and, on
10 the other hand, a friction disc (20) comprising, at its
outer periphery, at least one friction lining (16) for
contact with the friction face (37) of the reaction
plate (4), the said friction lining (16) being integral
with a support (21) coupled elastically, by way of a
15 torsion damper (20a), to a central hub (15) intended to
be integrated in rotation with a driven shaft, charac-
terised in that the torsion damper (20a) penetrates
into the central recess (39) of the reaction plate (4)
and in that the drive flywheel (13), between its front
20 and rear extremities, carries the rotor (6) of a rotat-
ing electric machine (2) comprising a fixed stator (5).

2. Device according to Claim 1, characterised in
that the torsion damper (20a) includes, on the one
hand, a first guide washer (29) integral with the sup-
25 port (21) and with a second guide washer (30), and, on
the other hand, a web (34) arranged between the two
guide washers (29, 30), and linked in rotation, possi-
bly after taking up play, with the hub (15), and in
that the second guide washer (30) is installed in the
30 central recess (39) of the reaction plate (4).

3. Device according to Claim 2, characterised in
that the torsion damper (20a) is installed radially un-
der a first annular portion (38) of axial orientation
being connected to the inner periphery of the friction
35 face (37).

4. Device according to Claim 3, characterised in
that the first portion (38) is extended inwards by an
inclined portion (142).

5. Device according to Claim 4, characterised in that the inclined portion is extended by a ring (130) of transverse orientation.

6. Device according to Claim 3, characterised in that the first portion (38) is connected to a ring of transverse orientation (130).

7. Device according to Claim 3, characterised in that the recess (39) is staircase-shaped.

8. Device according to Claim 1, characterised in that the drive flywheel (13) is in at least two parts, namely, a first part consisting of the reaction plate (4) and a second part (130, 131, 46), integral in rotation with the first part and intended to be fixed onto the drive shaft (12).

9. Device according to Claim 8, characterised in that the second part (130, 131, 46, 230) consists of a spacer intended to be interposed between the drive shaft and the reaction plate.

10. Device according to Claim 9, characterised in that the spacer (130, 131, 46) has an overall U-shaped cross section with an upper branch (46) of axial orientation, overall in the form of a sleeve with an end shoulder (48) for fixing to the rotor (6) of the electric machine (2), and an annular lower branch (131) of axial orientation for fixing to the reaction plate (4).

11. Device according to Claim 9, characterised in that the spacer (230) consists of a shaft.

12. Device according to Claim 8, characterised in that the second part consists of a shaft splined at its rear extremity for linking in rotation with the reaction plate (4).

13. Device according to Claim 8, characterised in that the second part consists of a pedestal splined internally for linking in rotation with a central shaft (430) coming from the reaction plate (4).

14. Device according to Claim 8, characterised in that the second part consists of a flange (431a) linked

in rotation with a central shaft (430a) coming from the reaction plate (4).

15. Device according to Claim 14, characterised in that the flange (431a) centrally features a hub (431b) with an internal bore of frustoconical shape for mounting on the outer periphery of the shaft (430a) of frustoconical shape.

16. Device according to Claim 14, characterised in that the flange (431a), at its outer periphery, carries a sleeve with an end shoulder (48) for fixing to the rotor (6) of the electric machine (2).

17. Device according to Claim 1, characterised in that the drive flywheel (13) carries bearing means (132) interposed radially between the said flywheel (13) and a carrier piece (134) integral with the stator (5) for defining a precise gap between the stator (5) and the rotor (6).

18. Device according to Claim 17, characterised in that the bearing means (132) are installed radially above elements (145) for fixing the drive flywheel (13) to the drive shaft (11).

19. Device according to Claim 18, characterised in that the bearing means (132) are carried at their inner periphery by a spacer (130, 46, 131) belonging to the flywheel (13) and integral with the reaction plate (4) for forming a spacer between the reaction plate (4) and the drive shaft (11).

20. Device according to Claim 18, characterised in that the bearing means (132) are carried at their outer periphery by a sleeve (46) integral with the reaction plate (4) and at their inner periphery by a skirt (133) integral with a carrier piece (134) carrying the stator (5) at its outer periphery.

21. Device according to Claim 17, characterised in that the bearing means (132) are installed on the same circumference as the elements (245) for fixing the drive flywheel (13) to the drive shaft (11).

22. Device according to Claim 17, characterised in that the bearing means (132) are installed radially below elements (345) for fixing the drive flywheel (13) to the drive shaft (11).

5 23. Device according to Claim 22, characterised in that the carrier piece is provided with through-holes (545), for at least one tool for screwing the fixing elements (345), consisting of screws, to pass through.

10 24. Device according to Claim 23, characterised in that the reaction plate (4) features through-holes in axial coincidence with the through-holes (545) of the carrier piece.

15 25. Device according to Claim 17, characterised in that the carrier piece (134) is integral with a spacer (61) and internally carries elastic means (462, 463) which can be deformed in order for elements (64), for fixing and flexible mounting of the carrier piece (134) onto the engine block (62) of the internal-combustion engine, to pass through.

20 26. Device according to Claim 1, characterised in that the engine flywheel (13) carries clearance means for chignons (8) which the stator (5) of the electric machine (2) features in axial projection.

25 27. Device according to Claim 17, characterised in that the carrier piece (134) features clearance means for chignons (8) which the stator (5) of the electric machine (2) features in axial projection.

30 28. Device according to Claim 1, characterised in that the engine flywheel (31) carries cooling means for cooling the electric machine.

29. Device according to Claim 28, characterised in that the cooling means consist of fins (1200, 1201, 1202, 1206) carried by one of the elements of the reaction plate (4)/rotor (6).

35 30. Device according to Claim 1, characterised in that the stator (5) of the electric machine (2) carries cooling means.

31. Device according to Claim 30, characterised in that the cooling means consist of piercings formed in the pack of metal plates (10) which the stator (5) features, the said piercings making it possible to transport a heat-carrying fluid from one face to the other.

32. Device according to Claim 30, characterised in that the stator (5) is integral with a spacer (61) carrying an air inlet (1208) and an air outlet (127).

33. Device according to Claim 1, characterised in that the reaction plate, at its outer periphery, features an annular skirt (144) surrounding the friction lining or linings (16) of the friction disc (20) and in that the annular skirt (144), at its inner periphery, features a groove (148) for catching the dust.

34. Device according to Claim 20, characterised in that the reaction plate (4) includes a sleeve (46) carrying the rotor (6) of the electric machine (2).

35. Device according to Claim 1, characterised in that the drive flywheel (13) locally features removal of material (1000) for dynamic balancing of the friction-clutch device.

36. Device according to Claim 1, characterised in that the drive flywheel (13) locally features additions of material for dynamic balancing of the friction-clutch device.

37. Device according to Claim 1, characterised in that the reaction plate (4) features tappings for mounting a removable plate (3000) equipped with at least one gauge rod (3001) penetrating, with centring, into a hole (3002) formed in a pack of metal plates (10) which the stator (5) features.

38. Device according to Claim 37, characterised in that the plate (3000) carries shims (3007) intended to be interposed between the stator (5) and the rotor (6) for defining a gap (7).

39. Device according to Claim 1, characterised in that the reaction plate (4), at its outer periphery,

features a toothed crown ring intended to be associated with at least one sensor.

40. Device according to Claim 1, characterised in that the reaction plate (4) carries a cover (19) on which is mounted, so as to pivot, a diaphragm (18, 22) bearing on the cover (19) for acting on a reaction plate (17) and clamping of the friction lining (16) between the pressure plates (17) and the reaction plate (4), the said pressure plate being integral in rotation with the said cover (19) while being able to be moved axially with respect to it.

41. Device according to Claim 40, characterised in that a declutching release bearing (23) is intended to act on the inner extremities of the fingers (22) which the diaphragm features centrally and in that the declutching release bearing belongs to a declutching device (24) of the concentric type.

42. Device according to Claim 41, characterised in that the declutching device (24) of the concentric type includes a piston (241) mounted so that it can move within a blind annular cavity (243) of axial orientation for forming a variable-volume chamber, and in that the piston (241) carries the declutching release bearing (23) and in that the blind annular cavity (243) is delimited by an outer body (242), in that a pre-load spring (244) acts between the outer body (242) and the declutching release bearing (23), and in that a force sensor (2000) is associated with the pre-load spring (244).


43. Device according to Claim 42, characterised in that the position sensor is placed between the pre-load spring (244) and the outer body (242).


44. Device according to Claim 41, characterised in that the declutching device of the concentric type is manoeuvred by an electric-motor actuator linked to a computer receiving information originating from sensors detecting the speed of rotation of the drive shaft (11) and of the driven shaft (12), and in that the sensor of


the speed of rotation of the drive shaft is used to detect the speed of rotation of the rotor (6) of the electric machine.

45. Device according to Claim 40, characterised in
5 that it includes a wear-take-up device for compensating for at least the wear of the said friction lining.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2

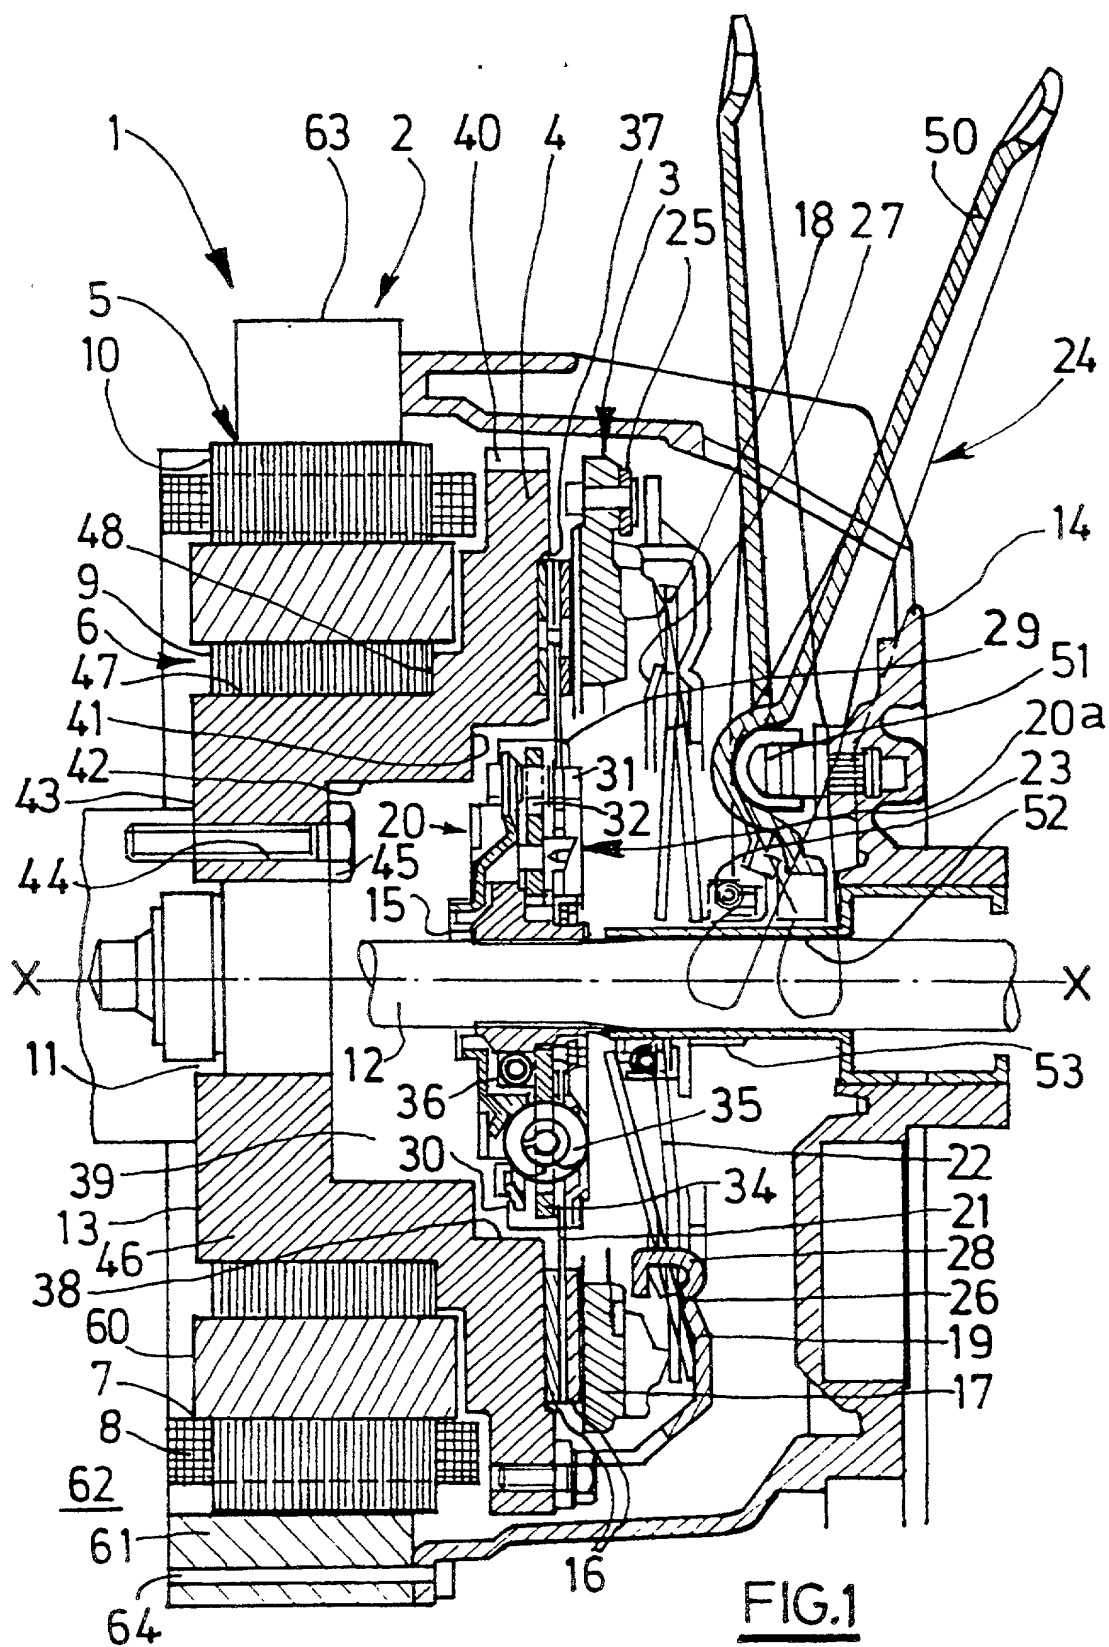


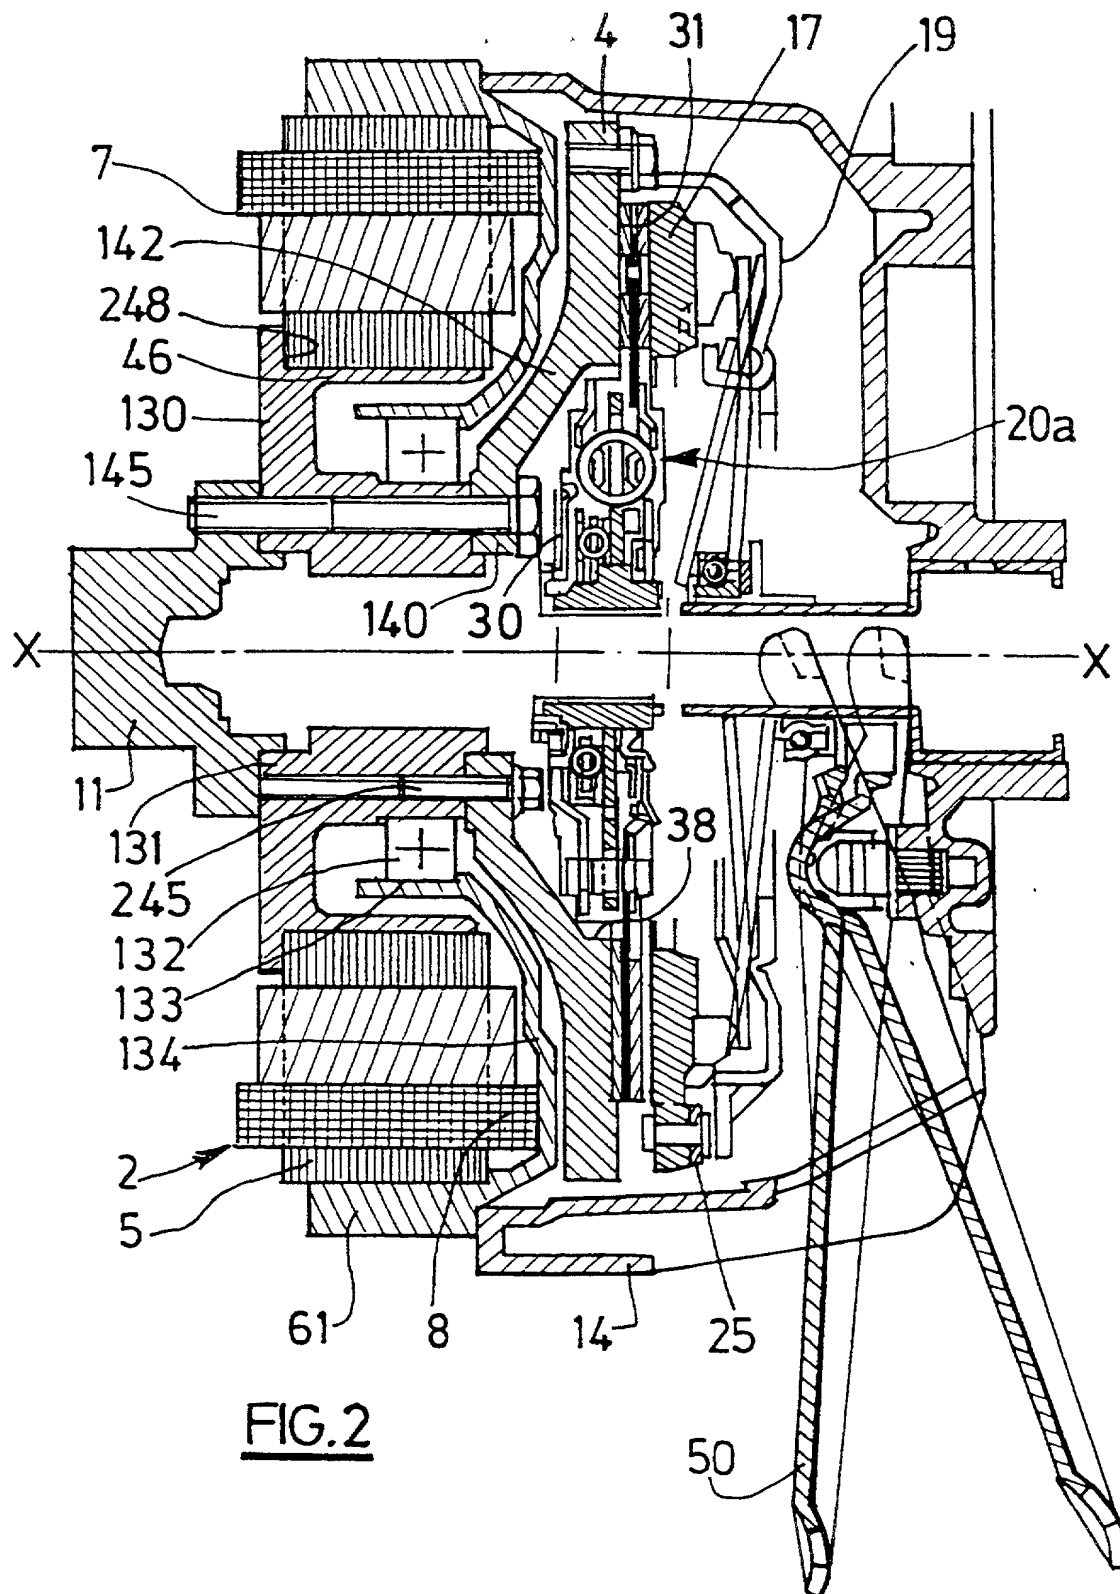


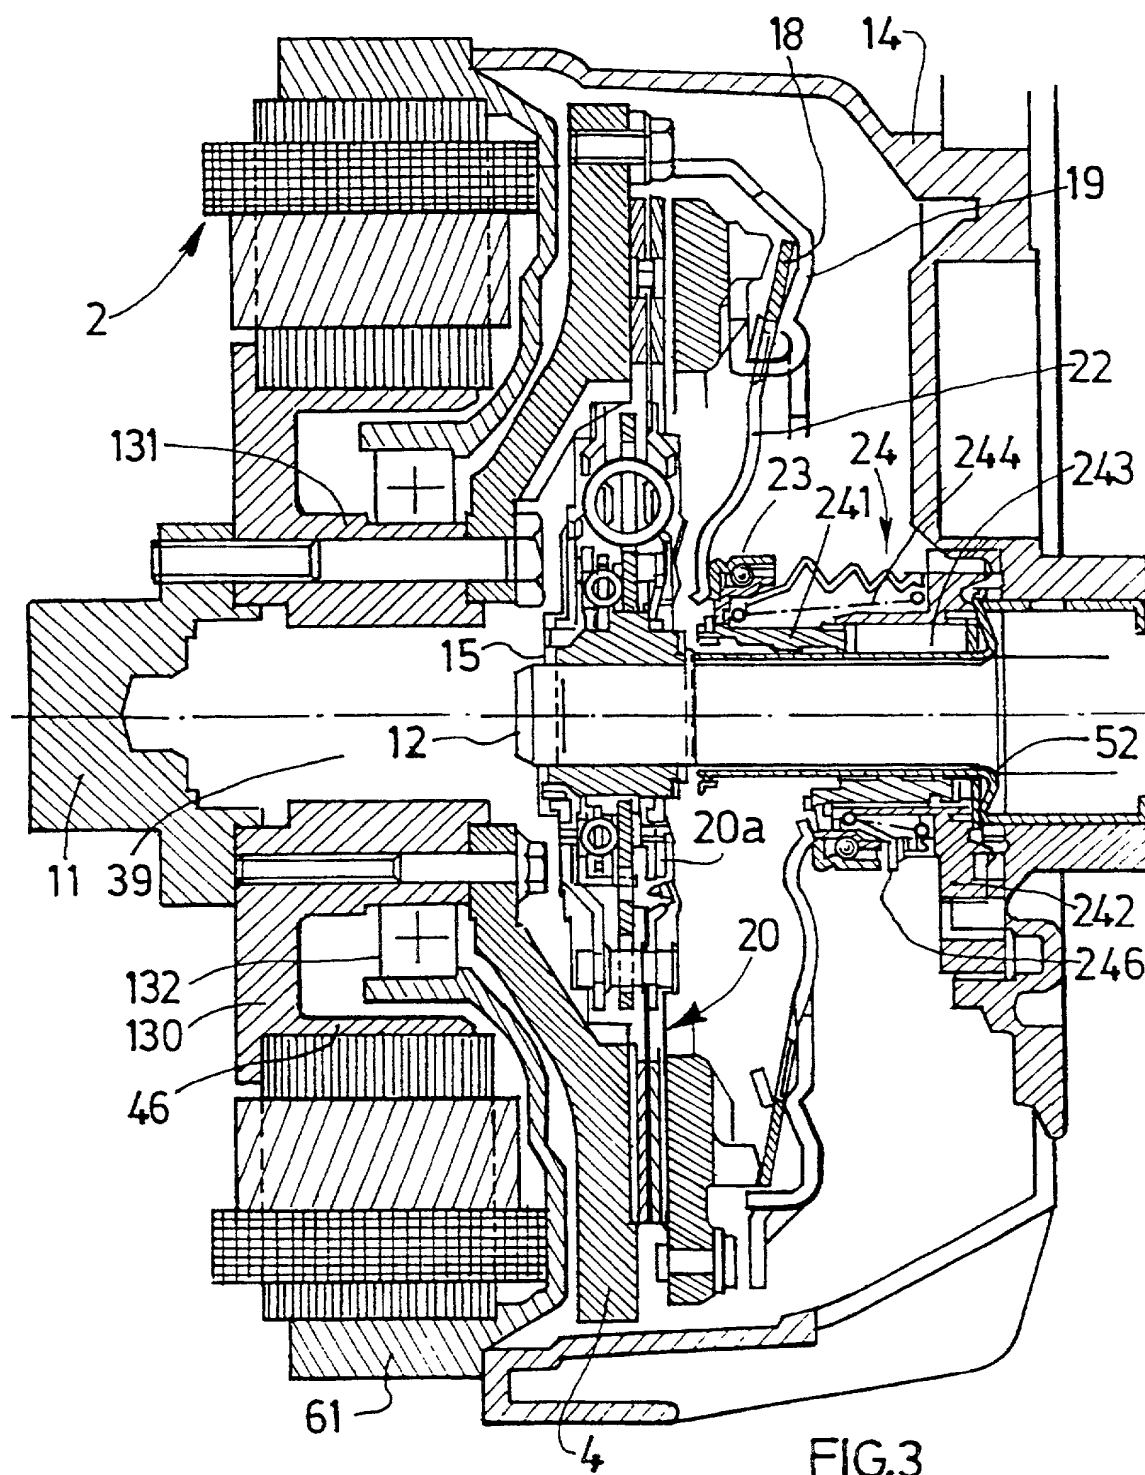
FIG.3

4/33

09/744733

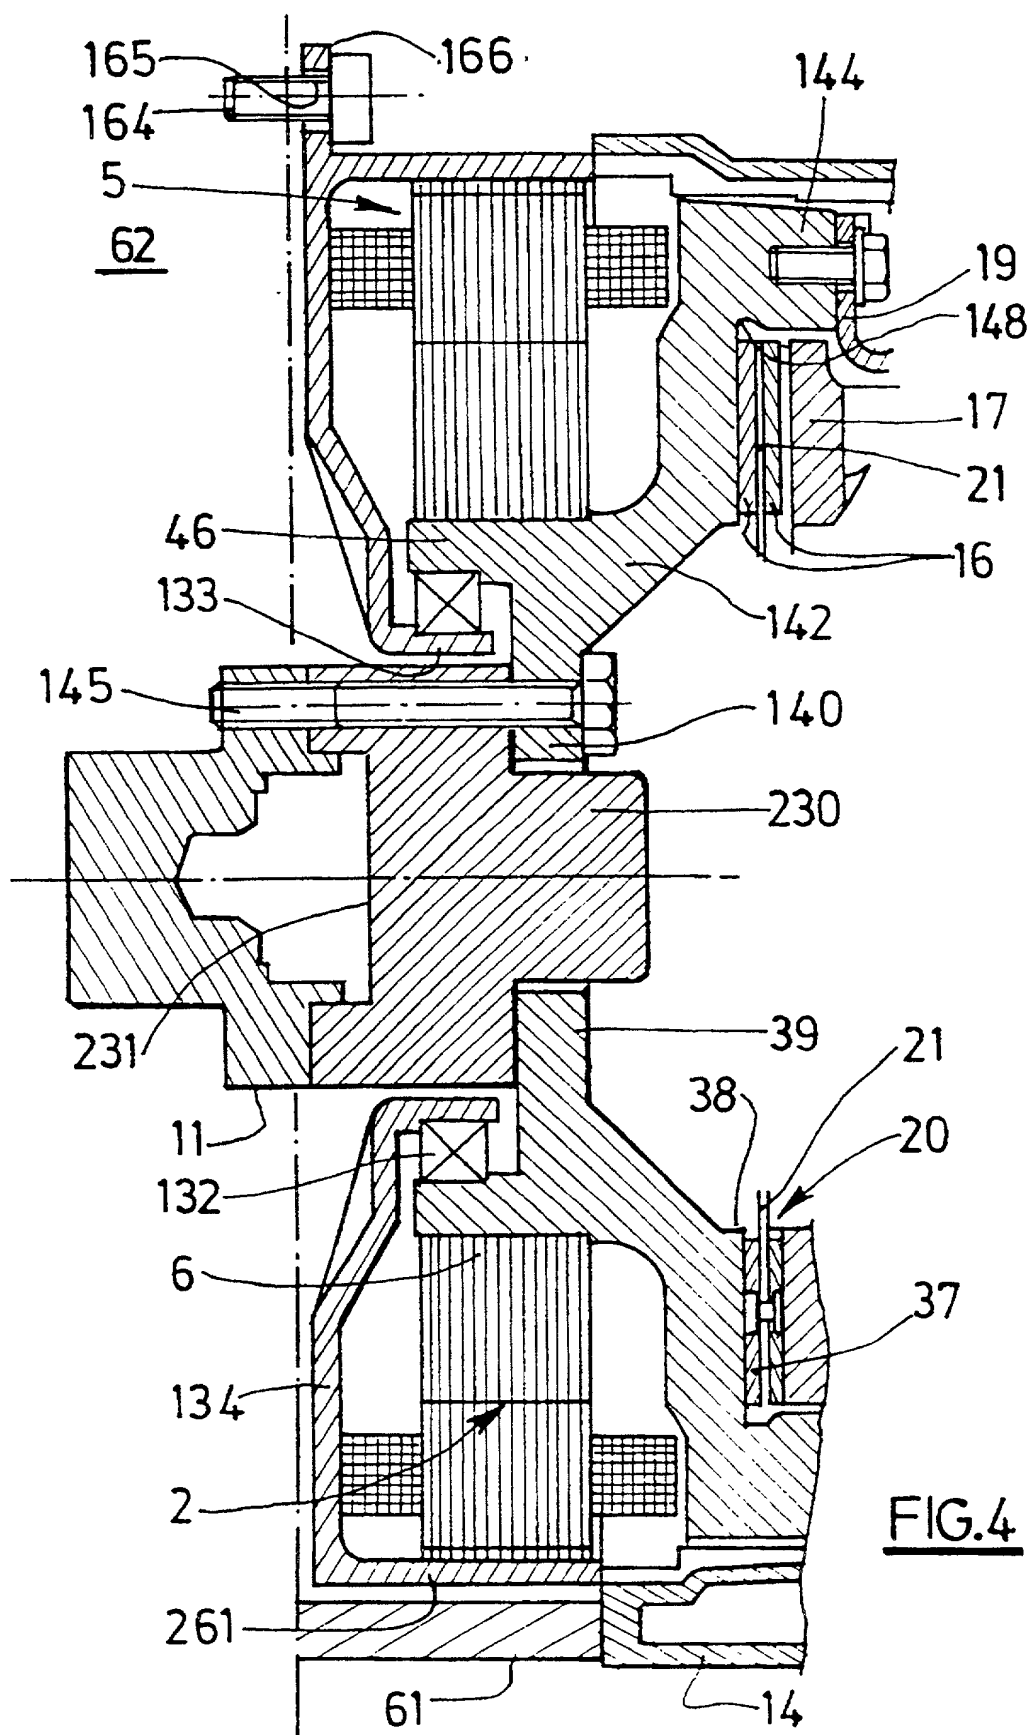FIG.4

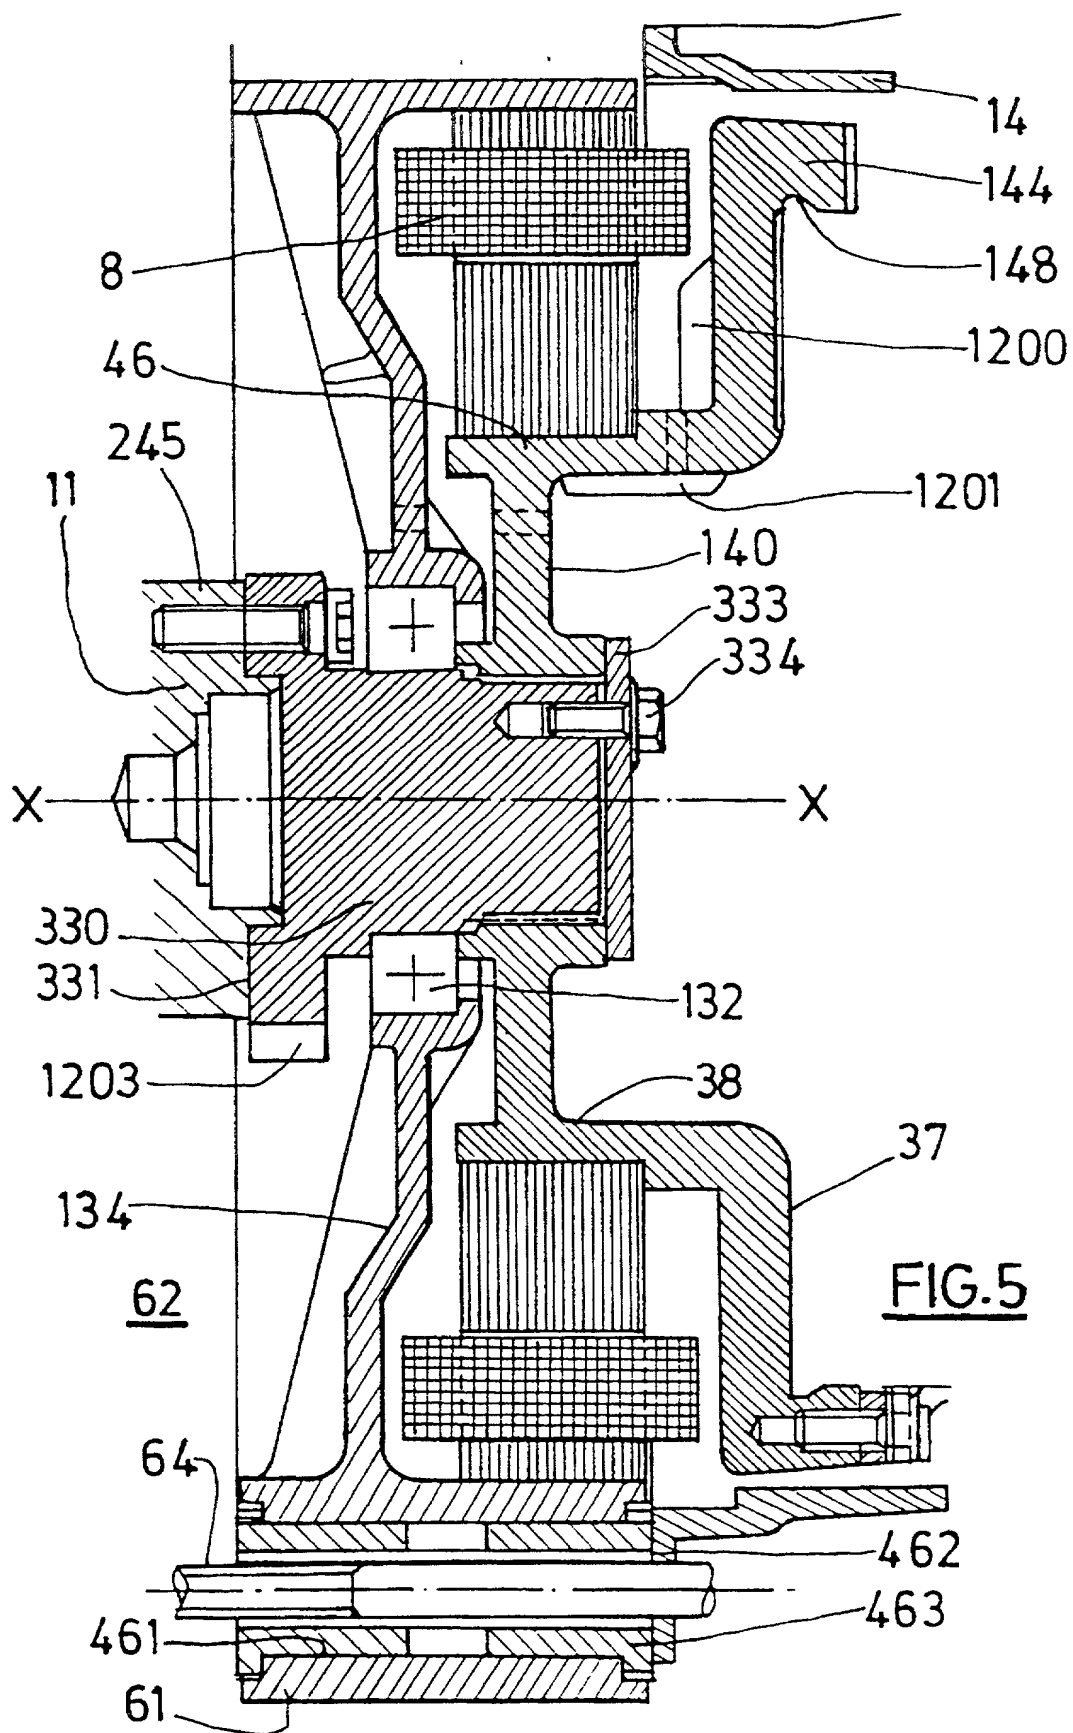

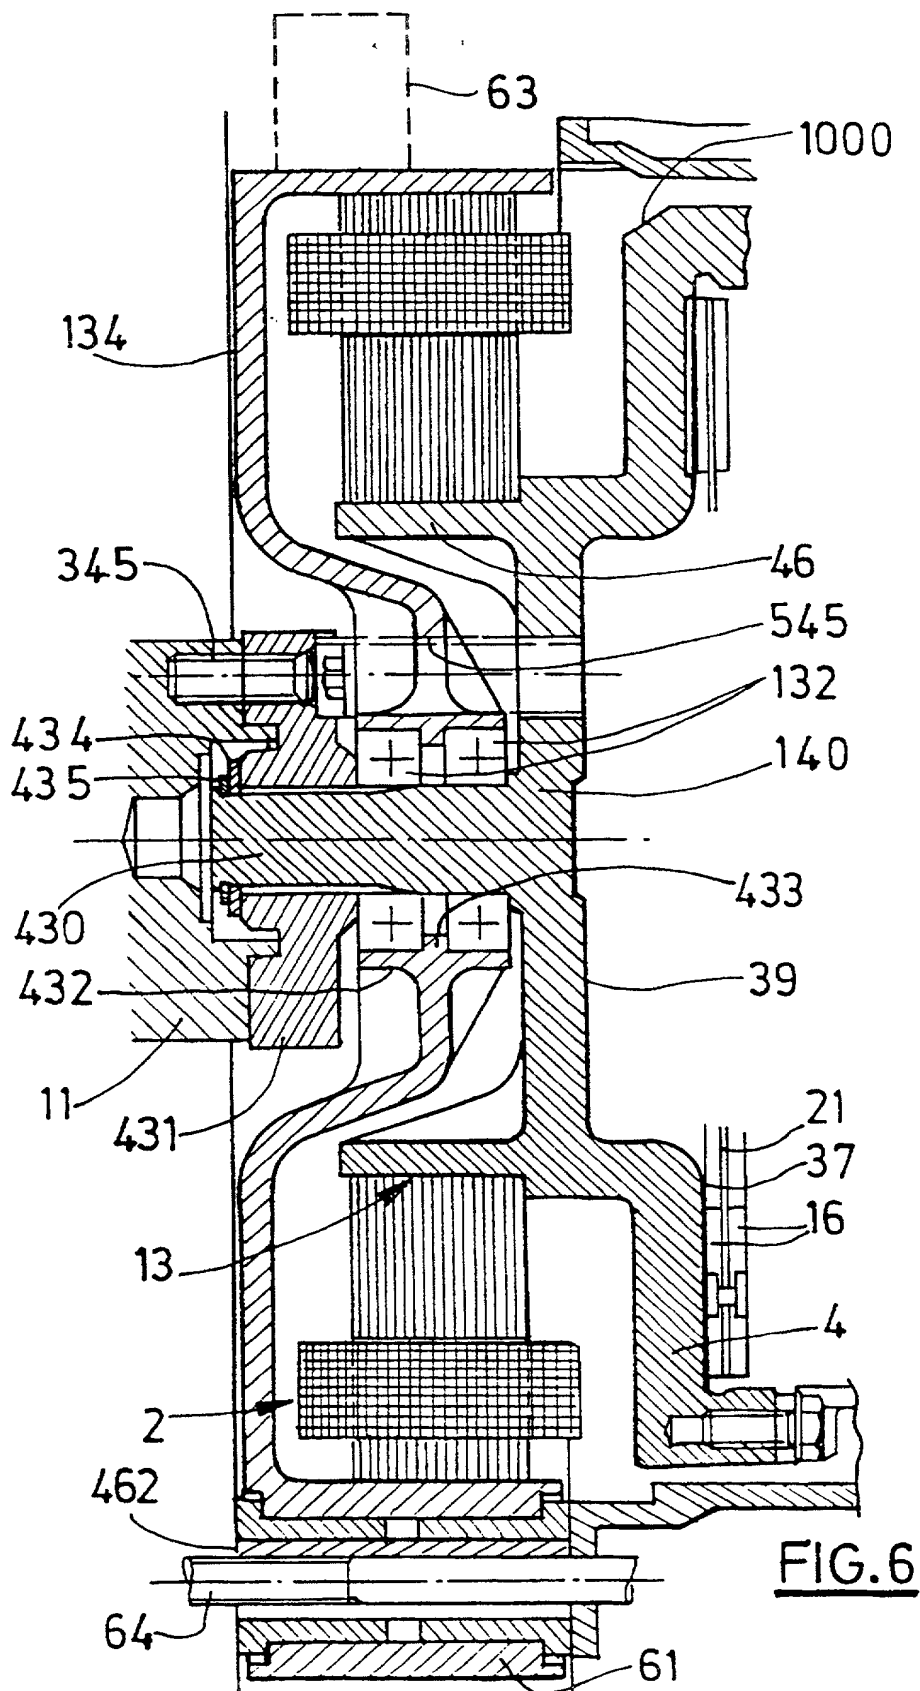

7/33

09/744733

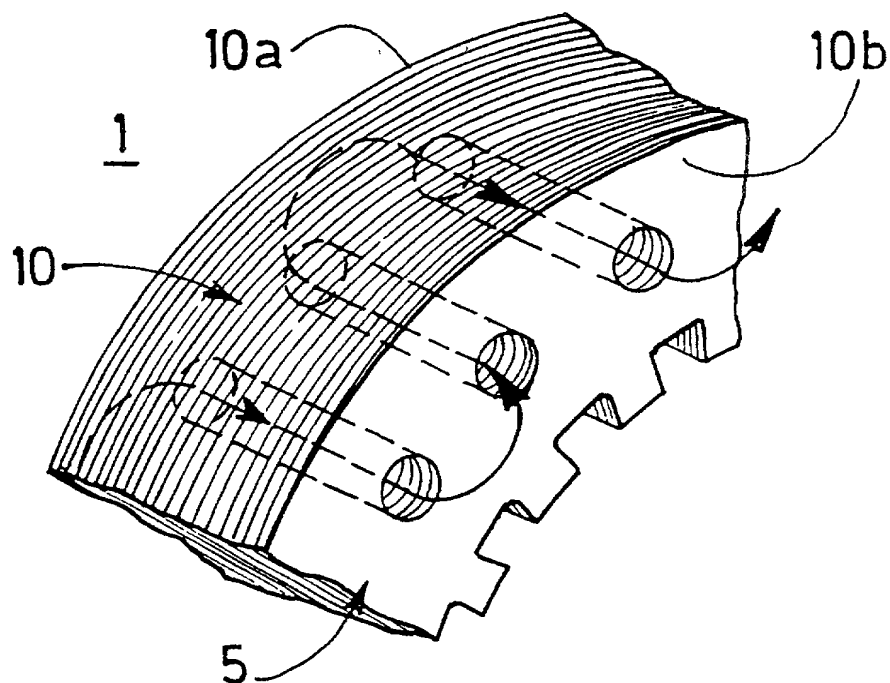


FIG.7


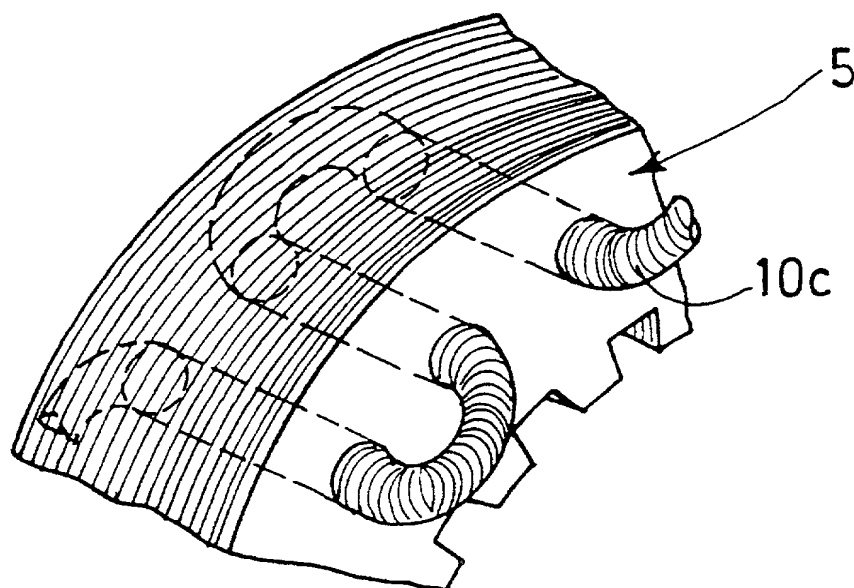


FIG.8

8/33

09/744733

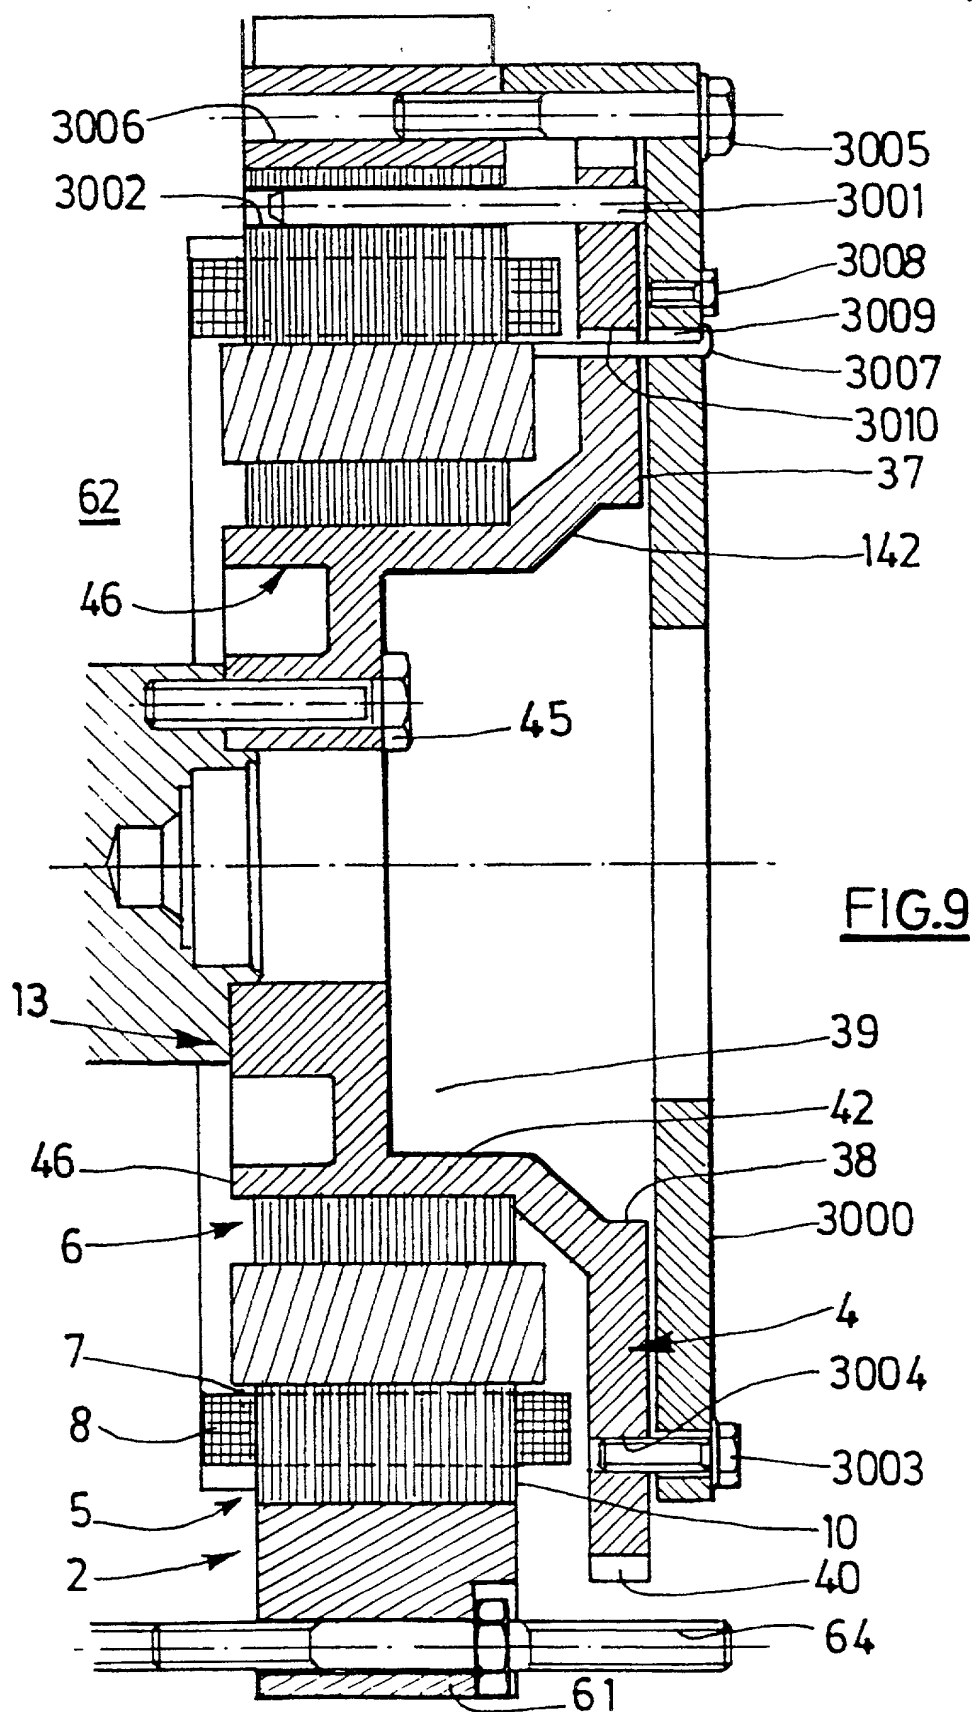

9/33

09/744733

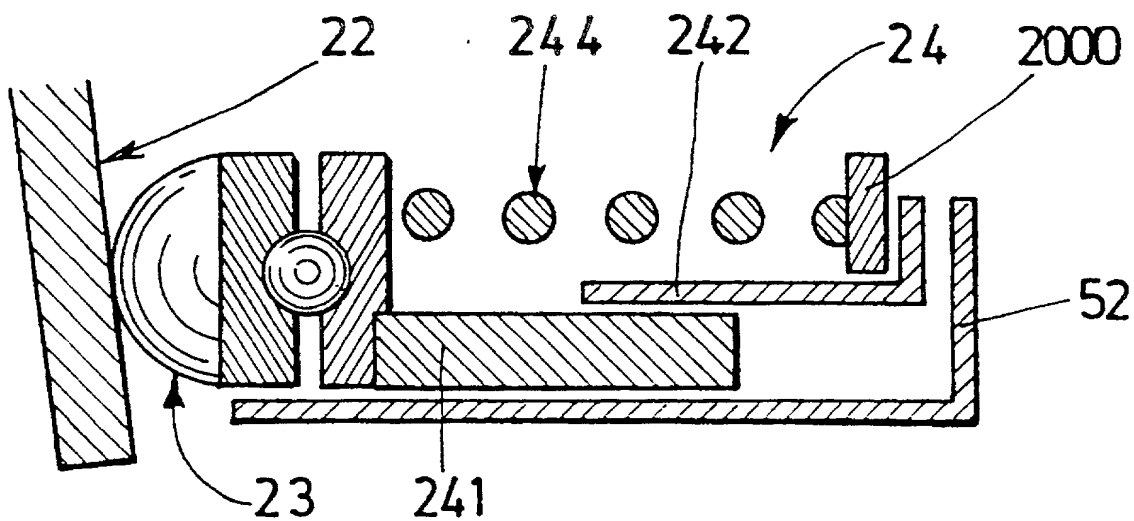


FIG.10

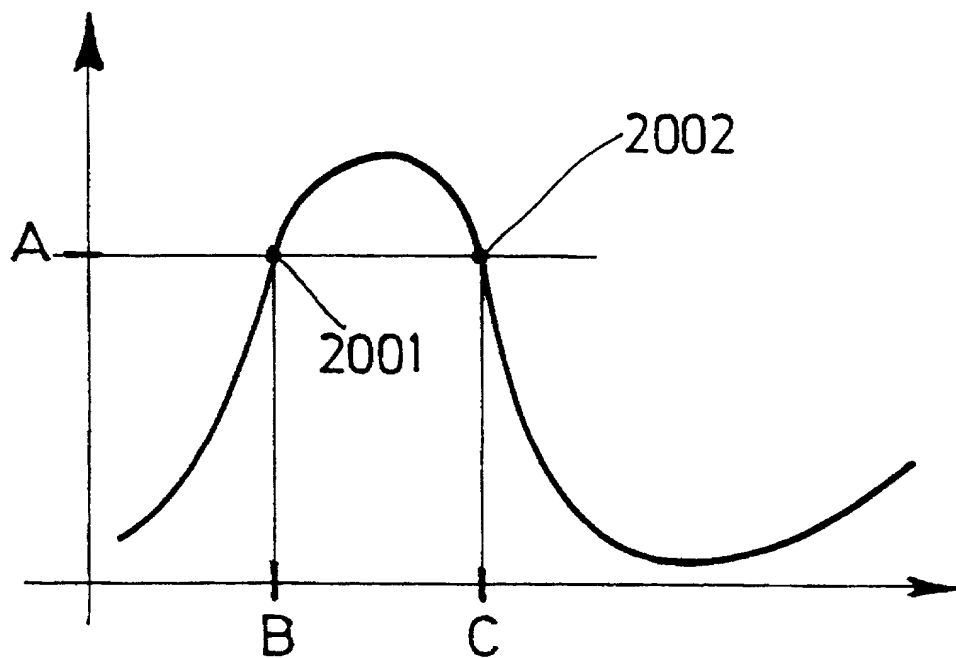


FIG.11

10/33

09/744733


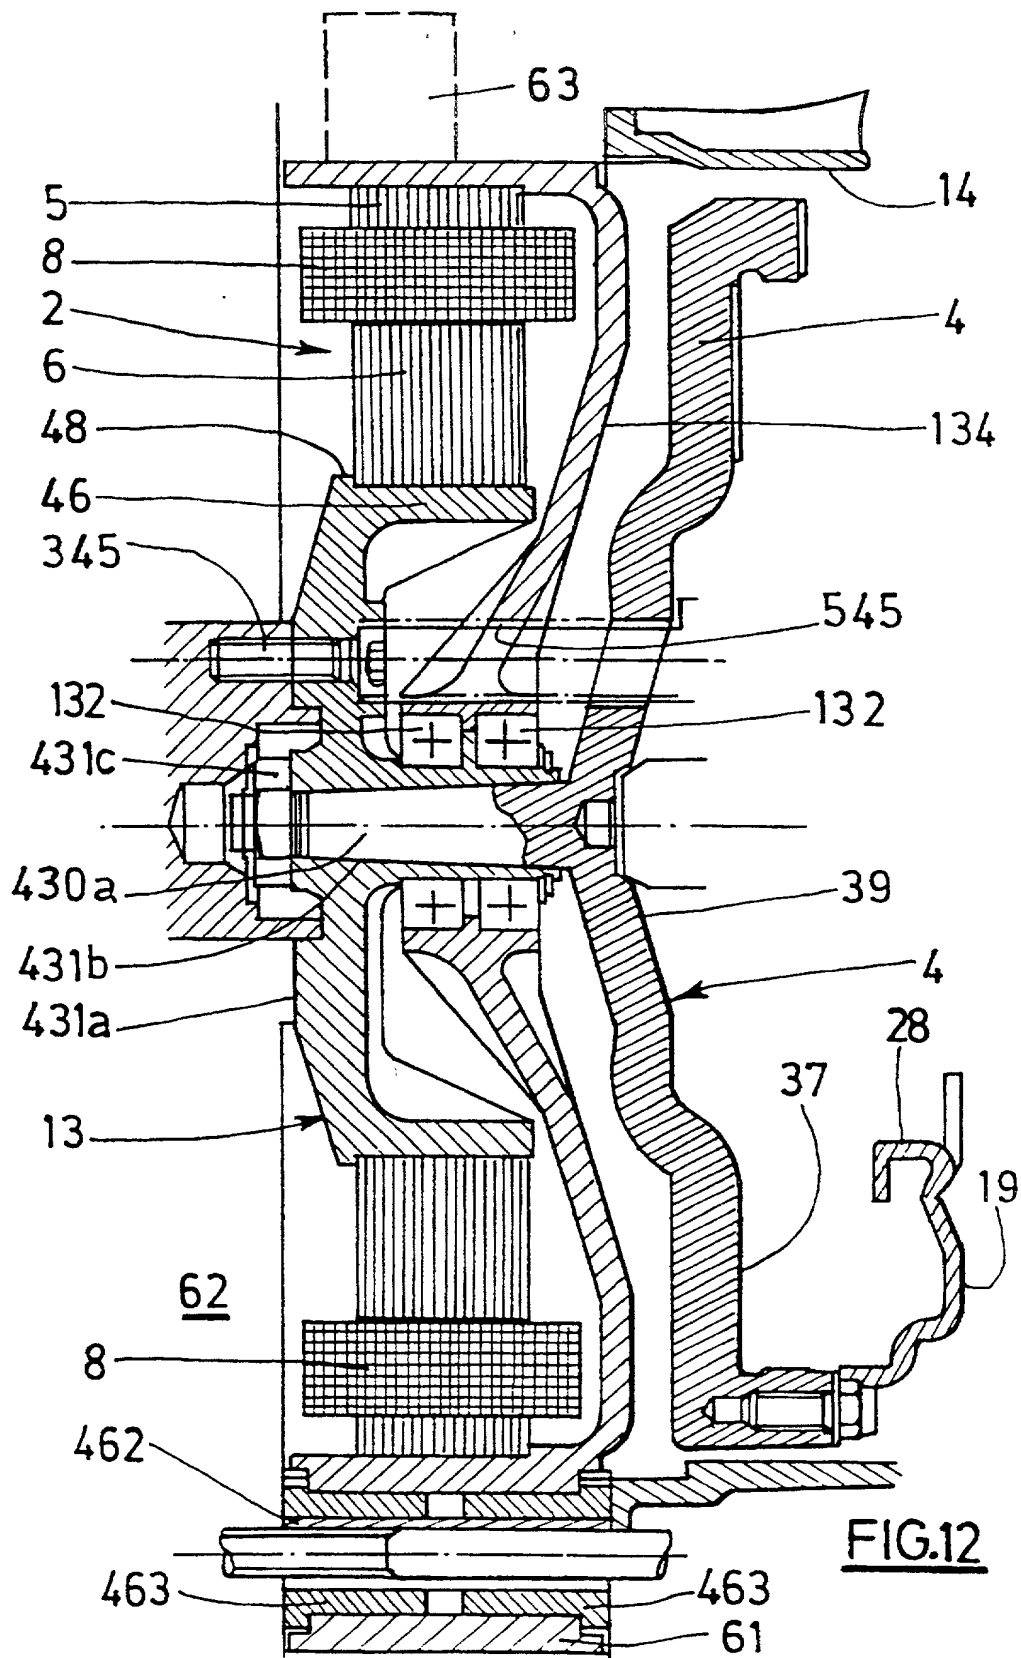



FIG.12


11/33

09/744733

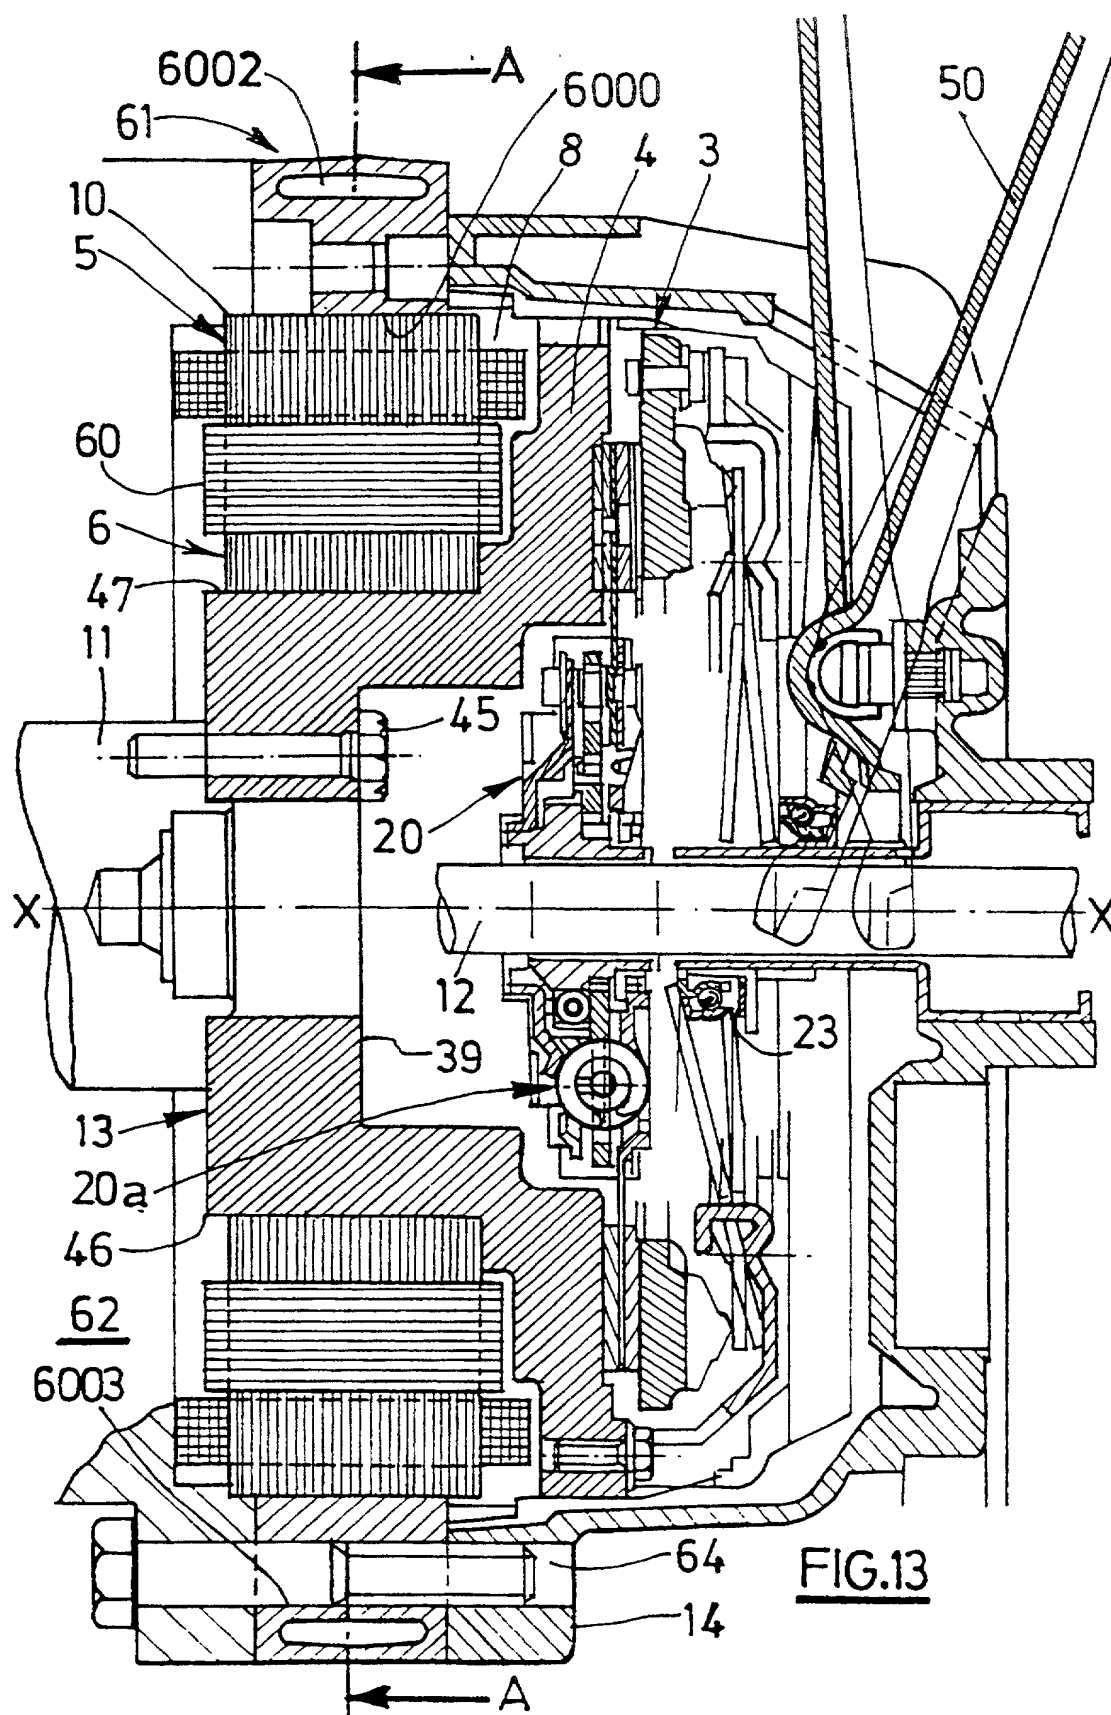

12/33

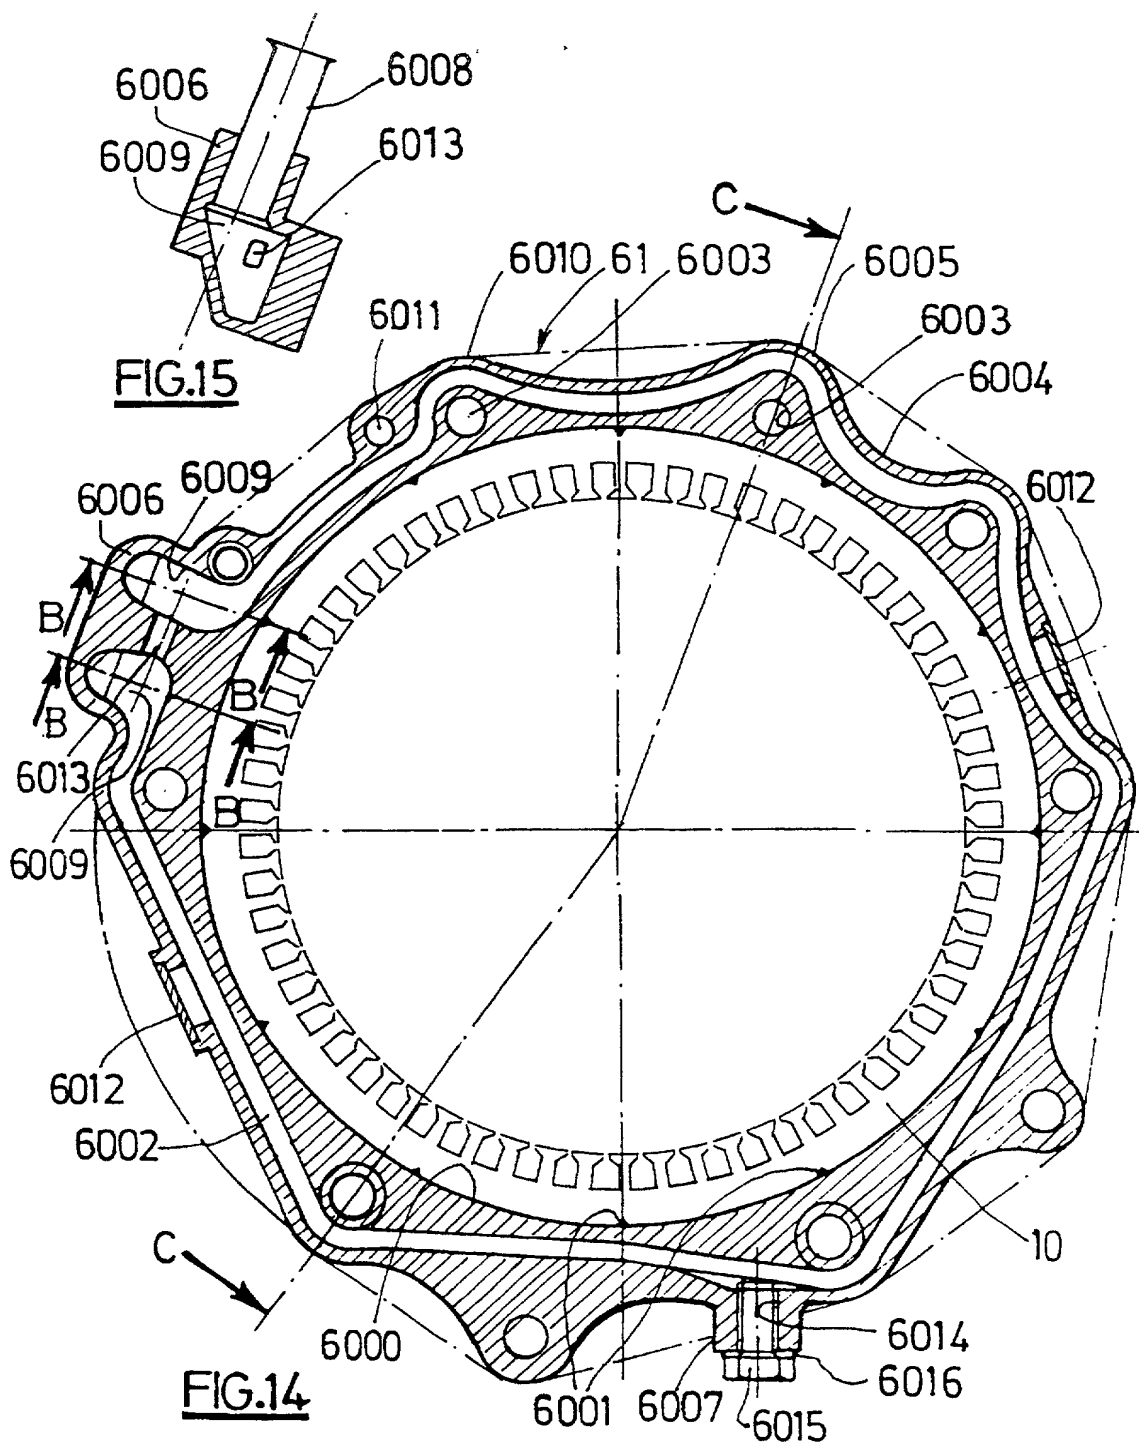

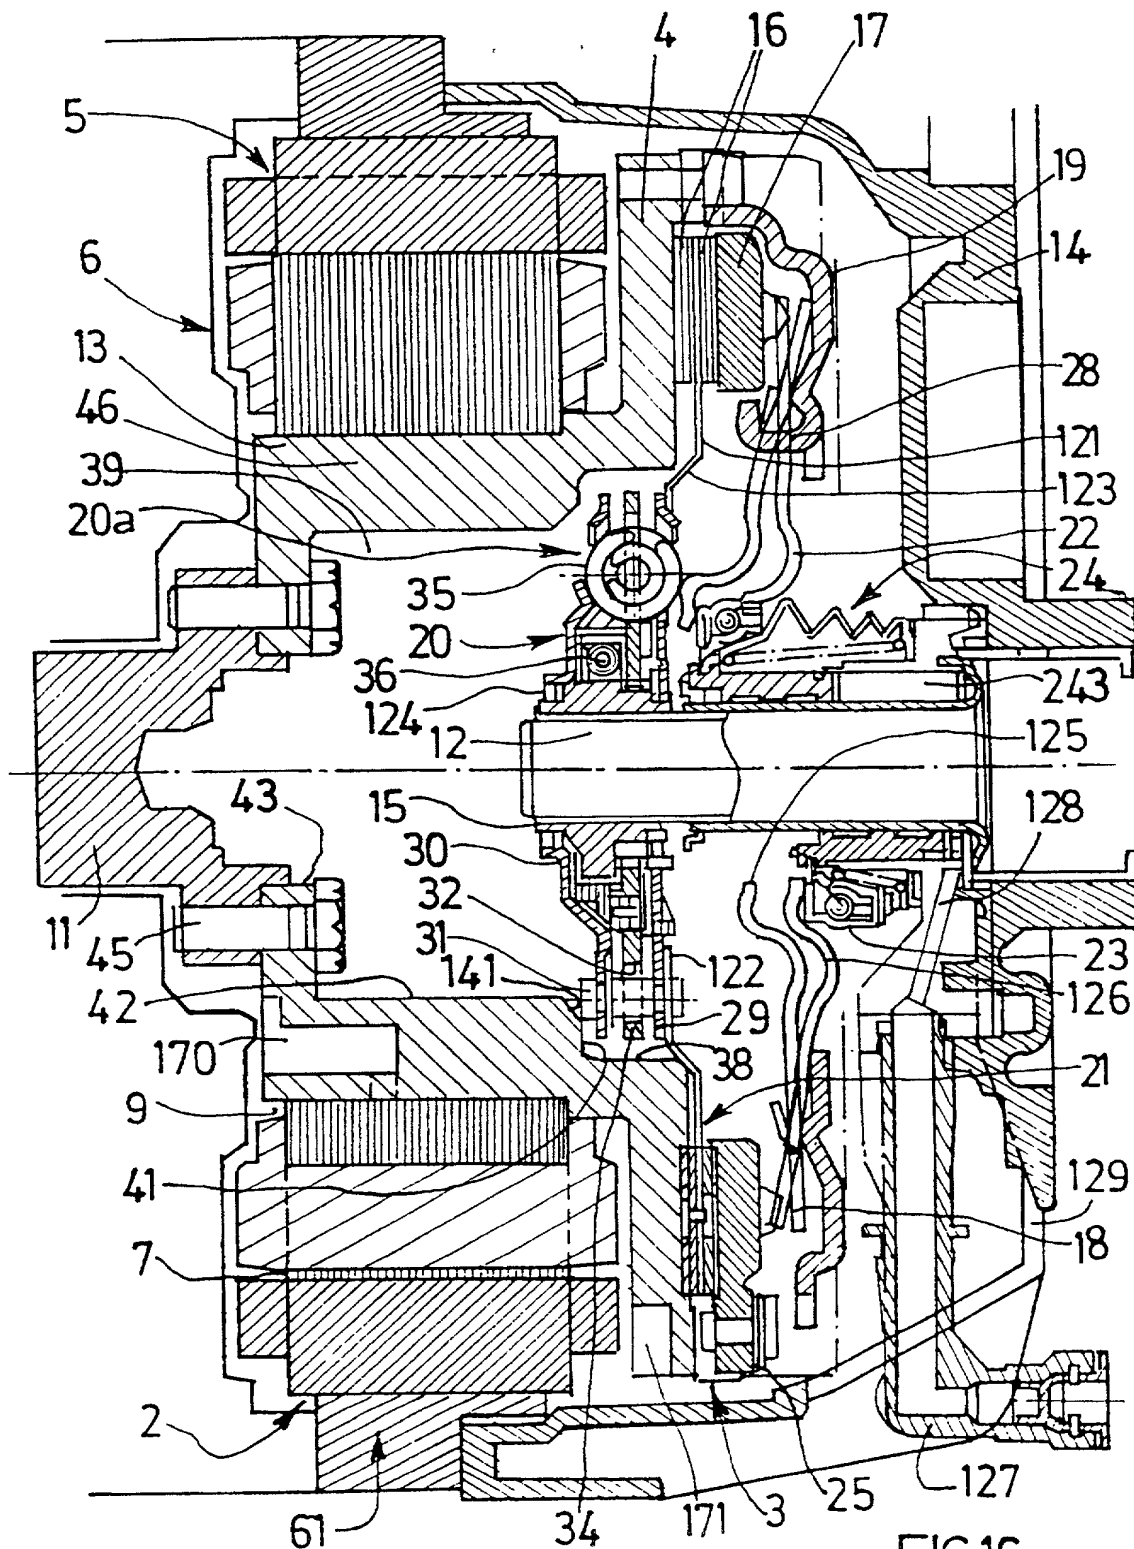

14/33

09/744733

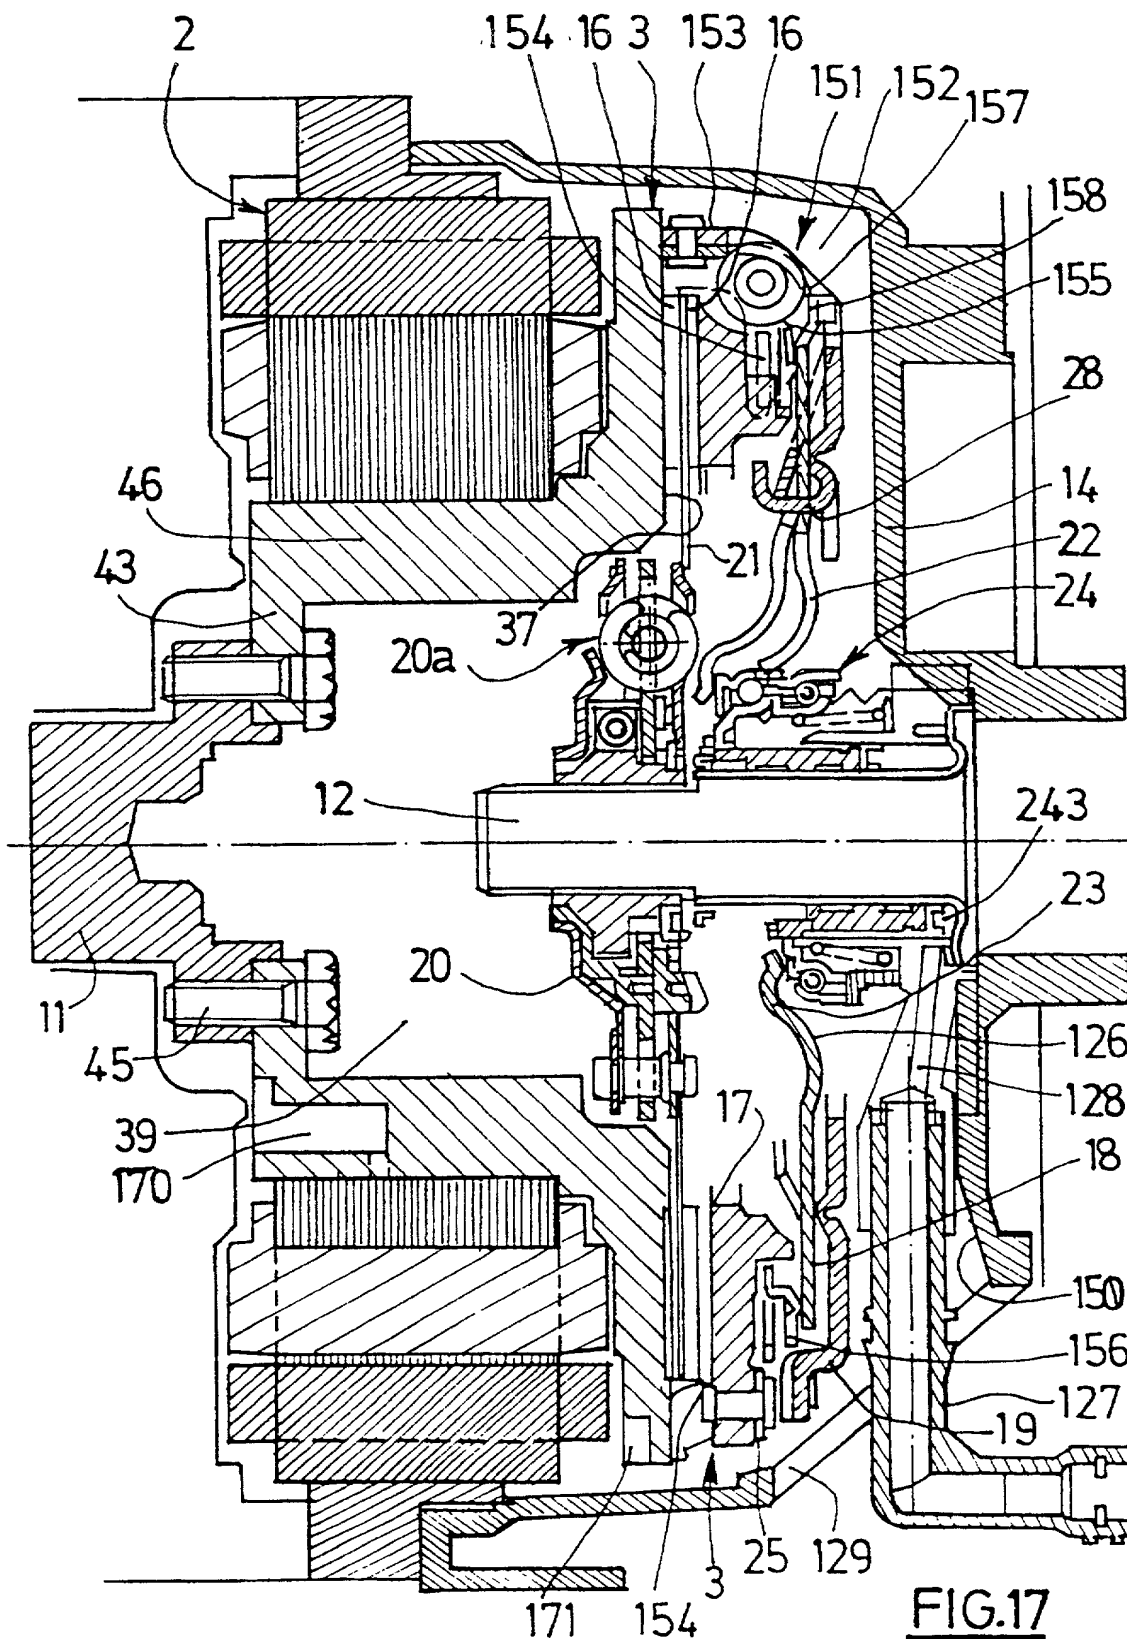


FIG.17

15/33

09/744733

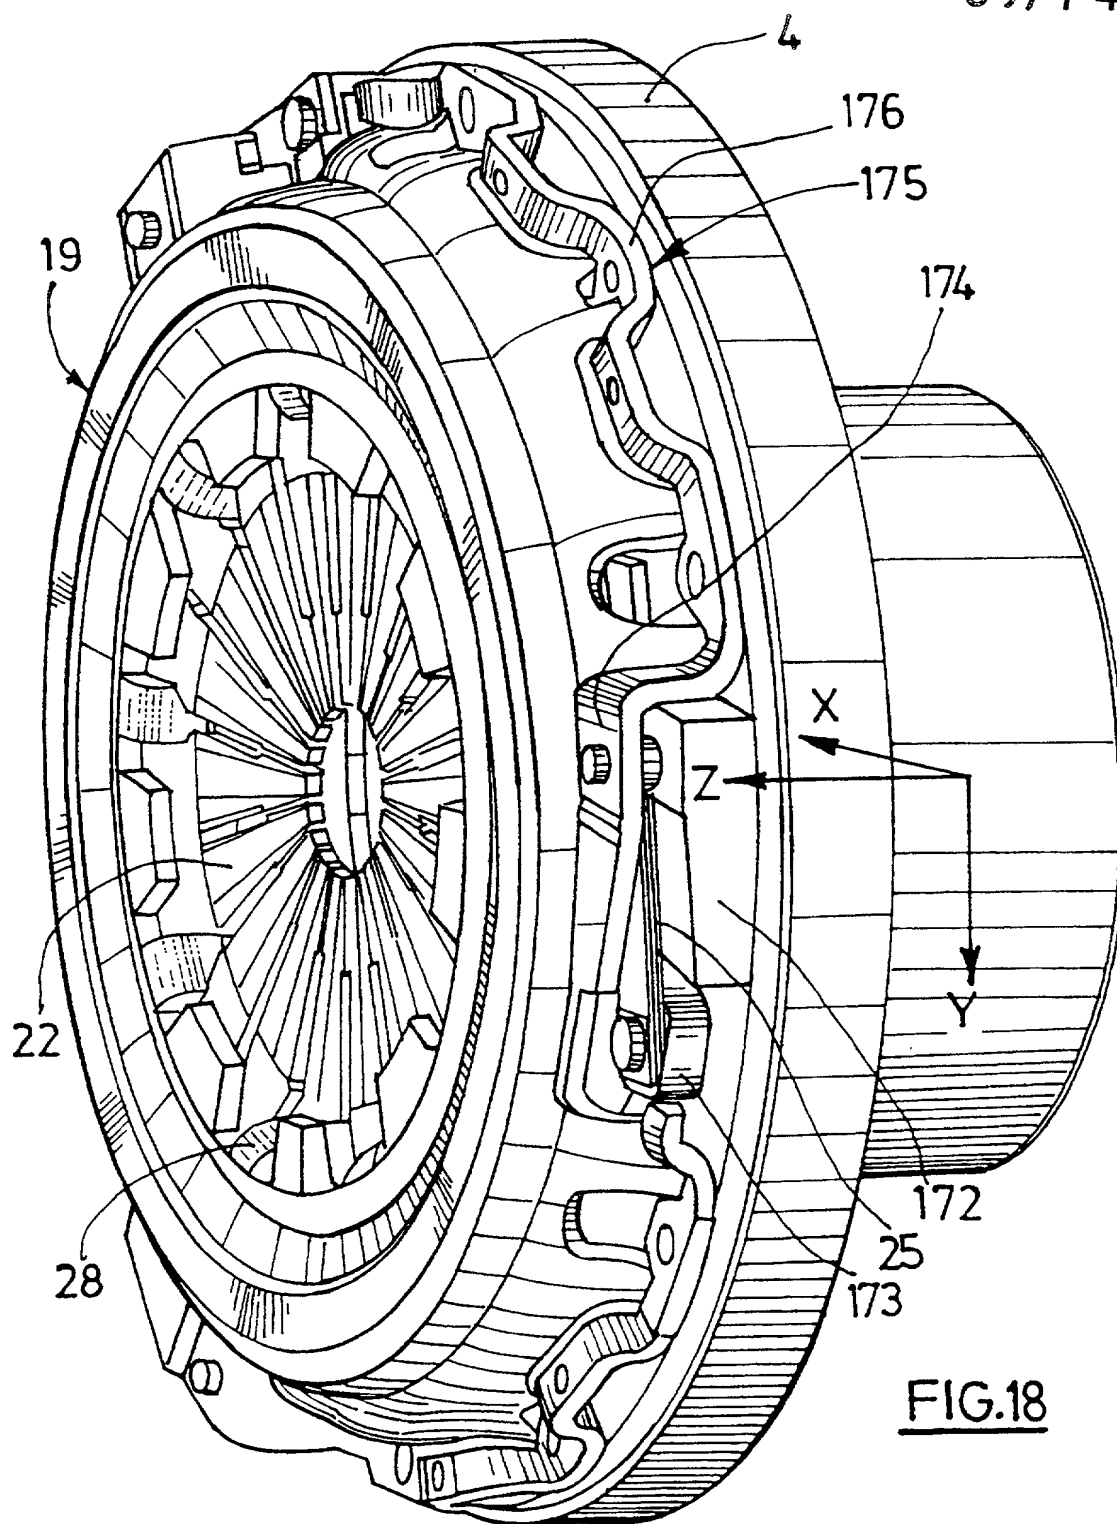


FIG.18


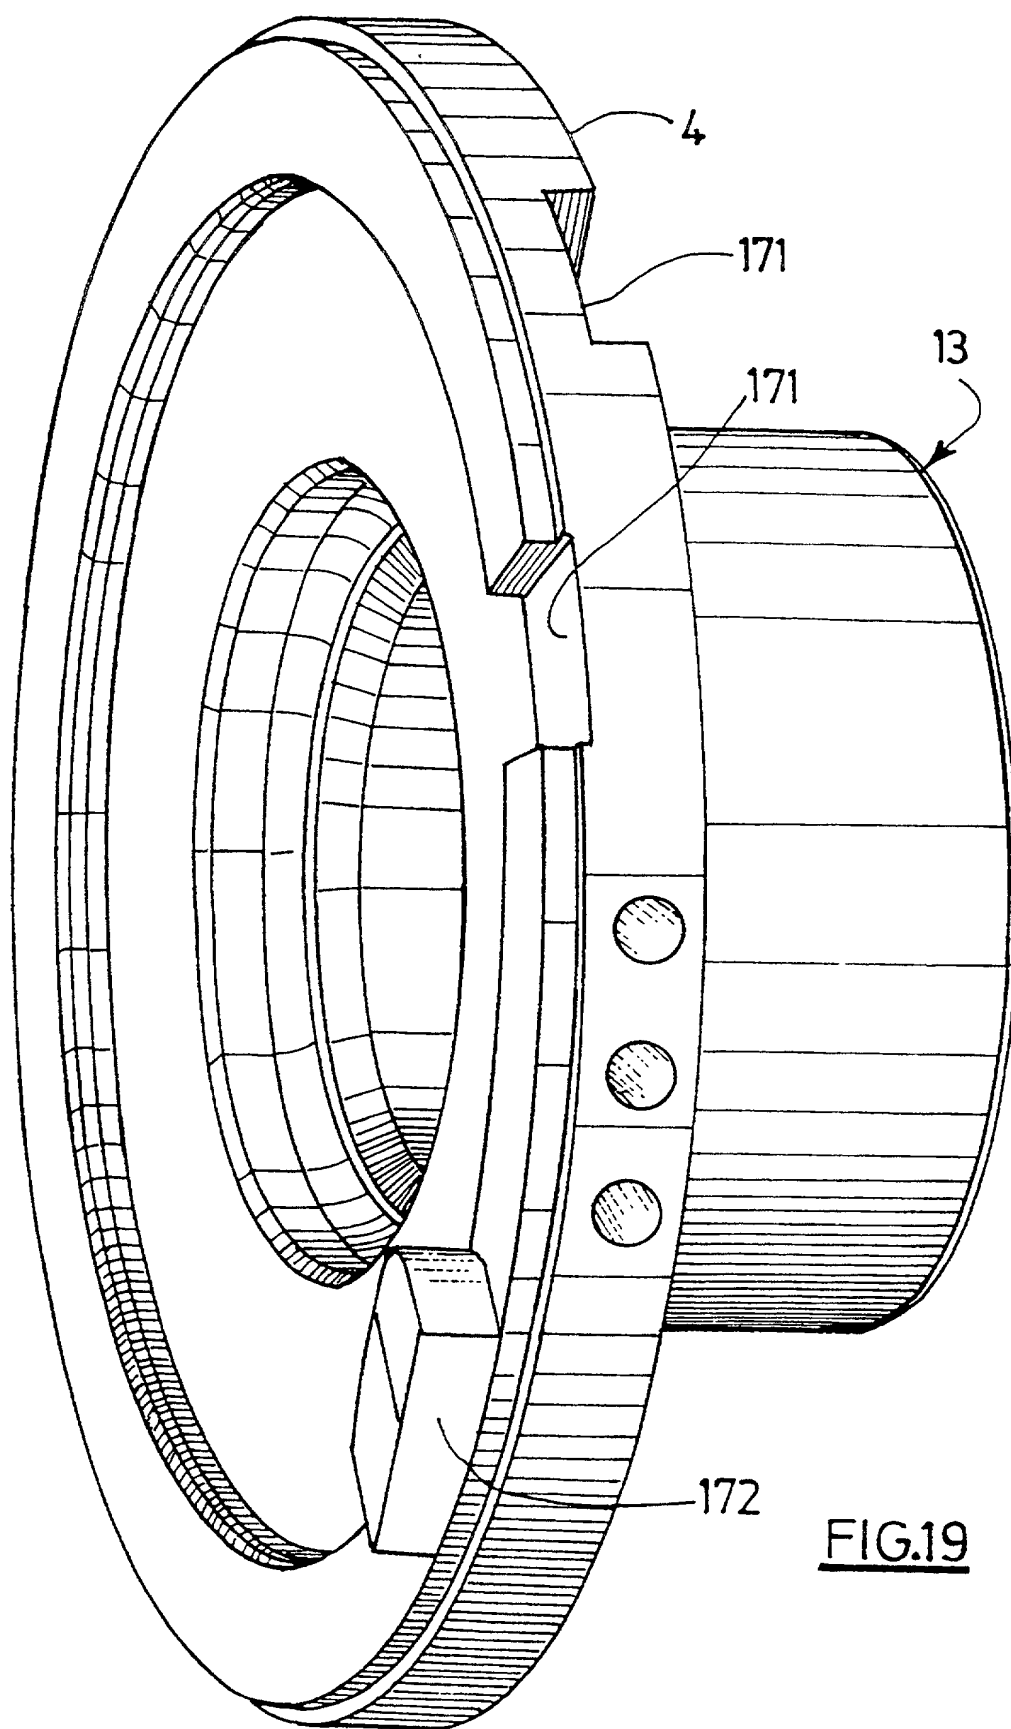


FIG. 19


17/33

09/744733

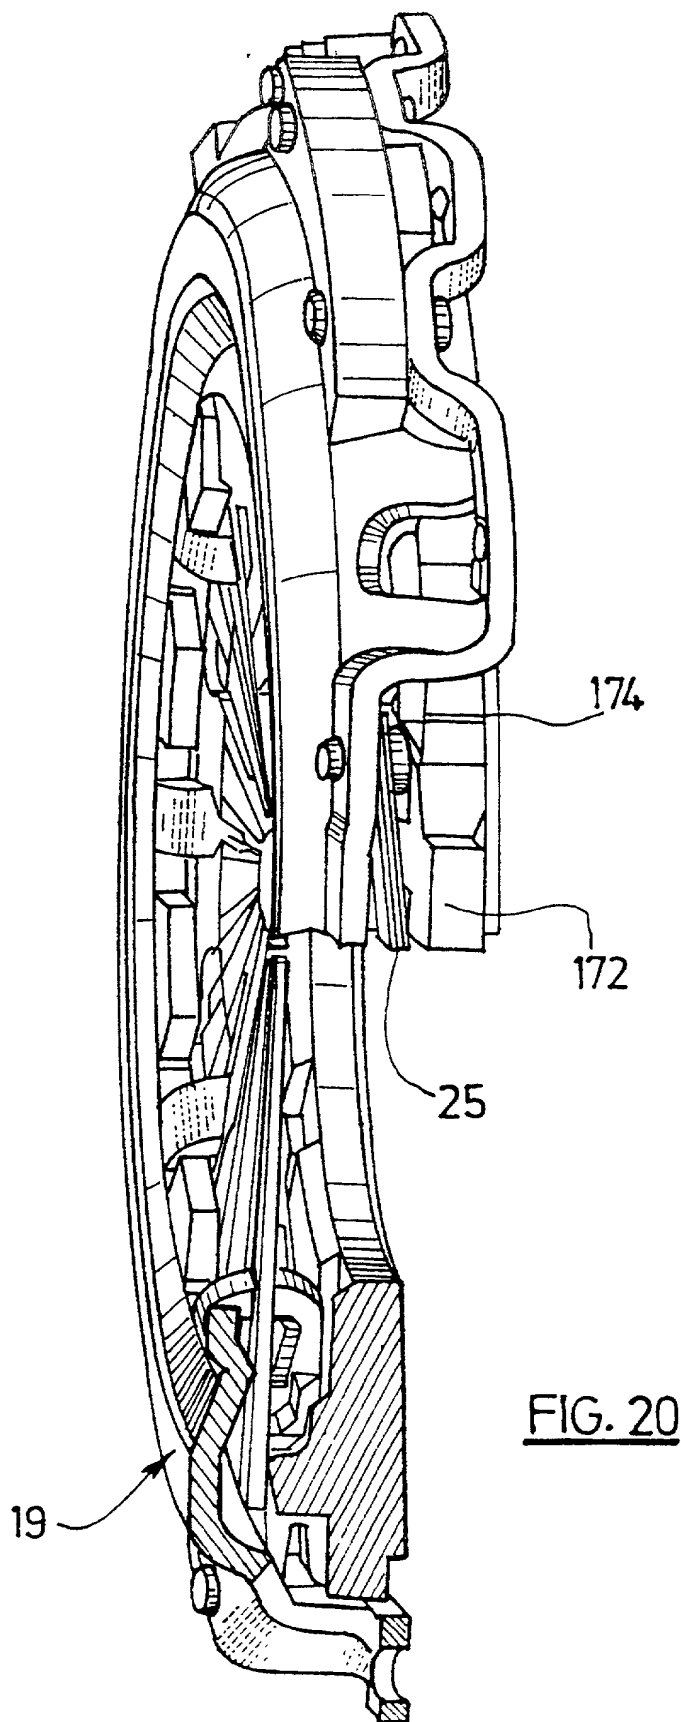


18/33

09/744733

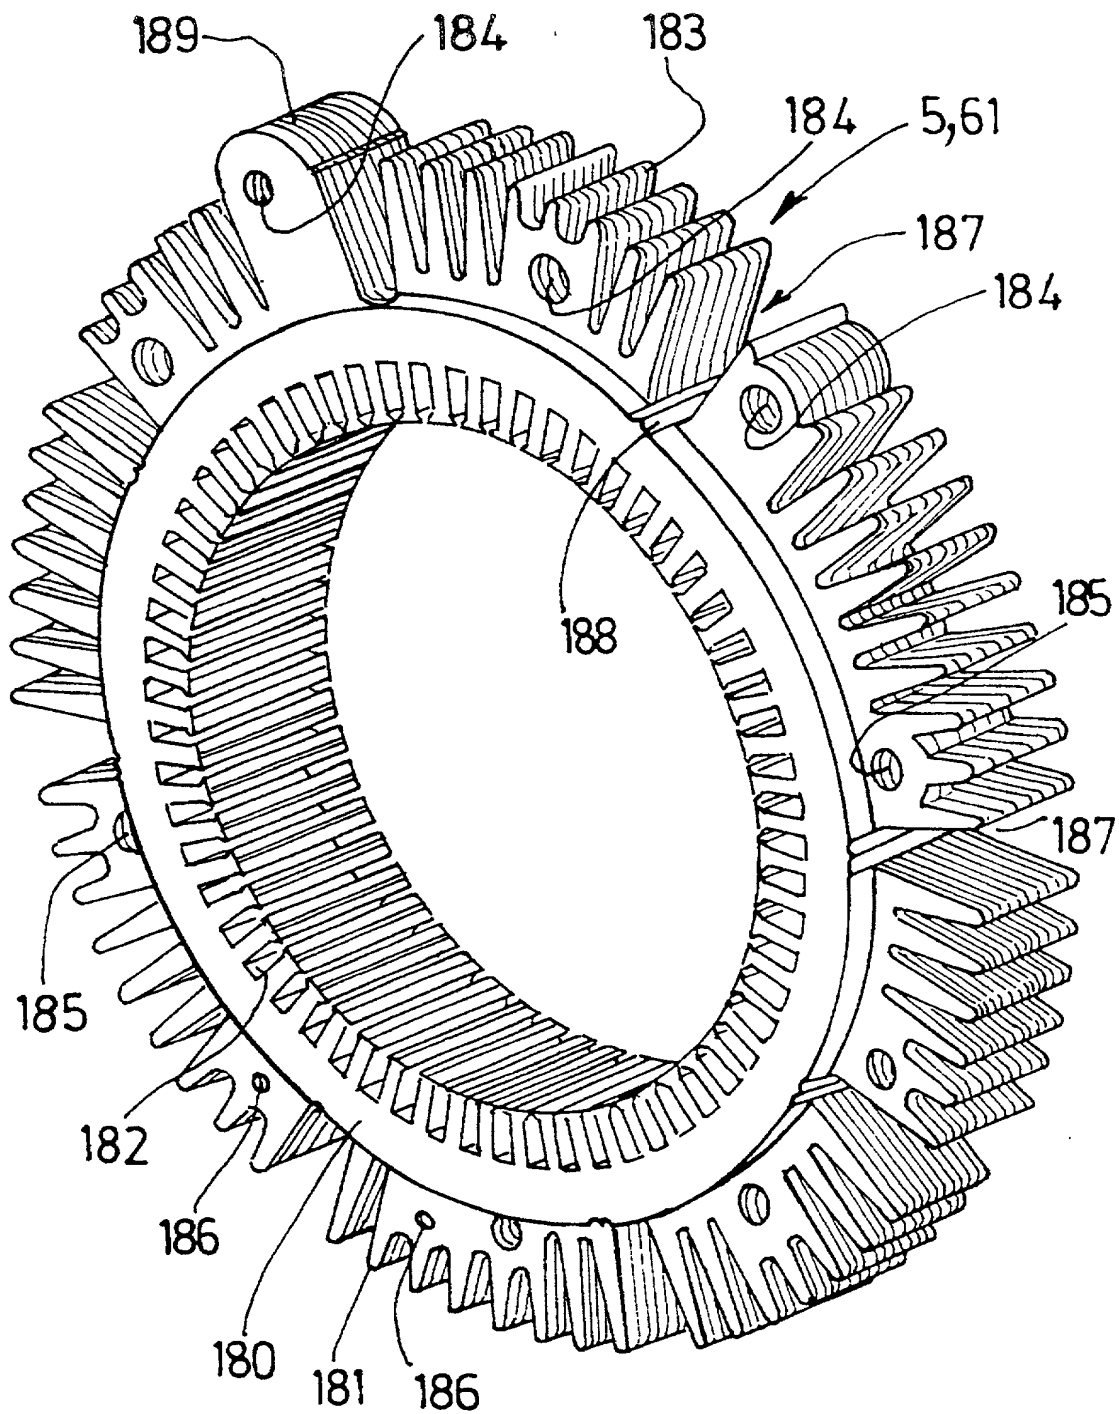FIG. 21


19/33

09/744733

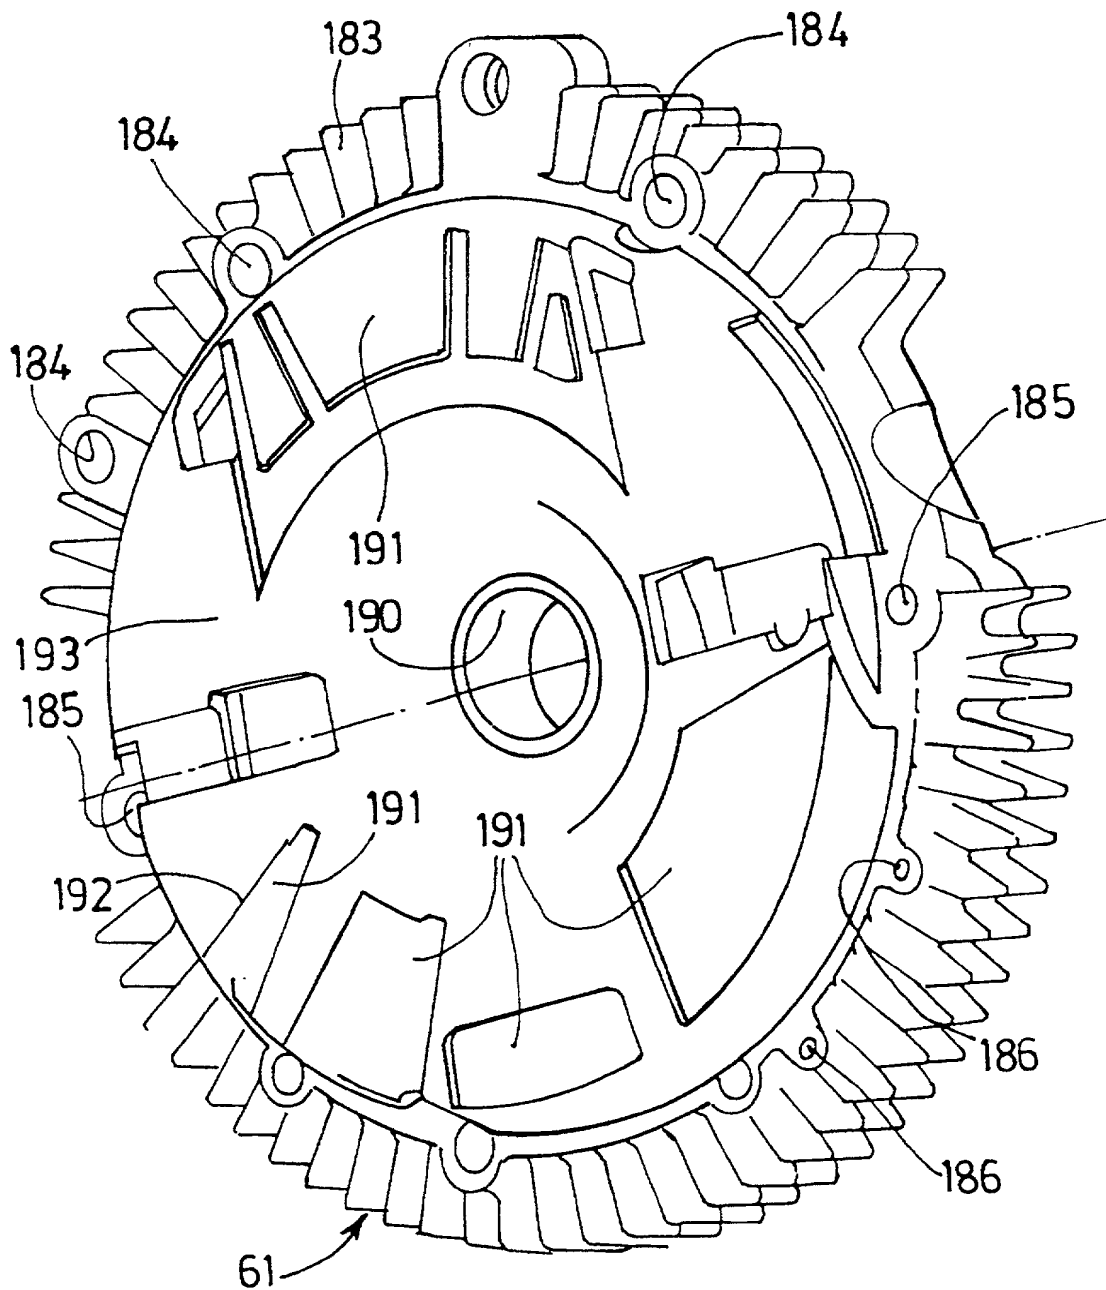FIG. 22


20/33

09/744733

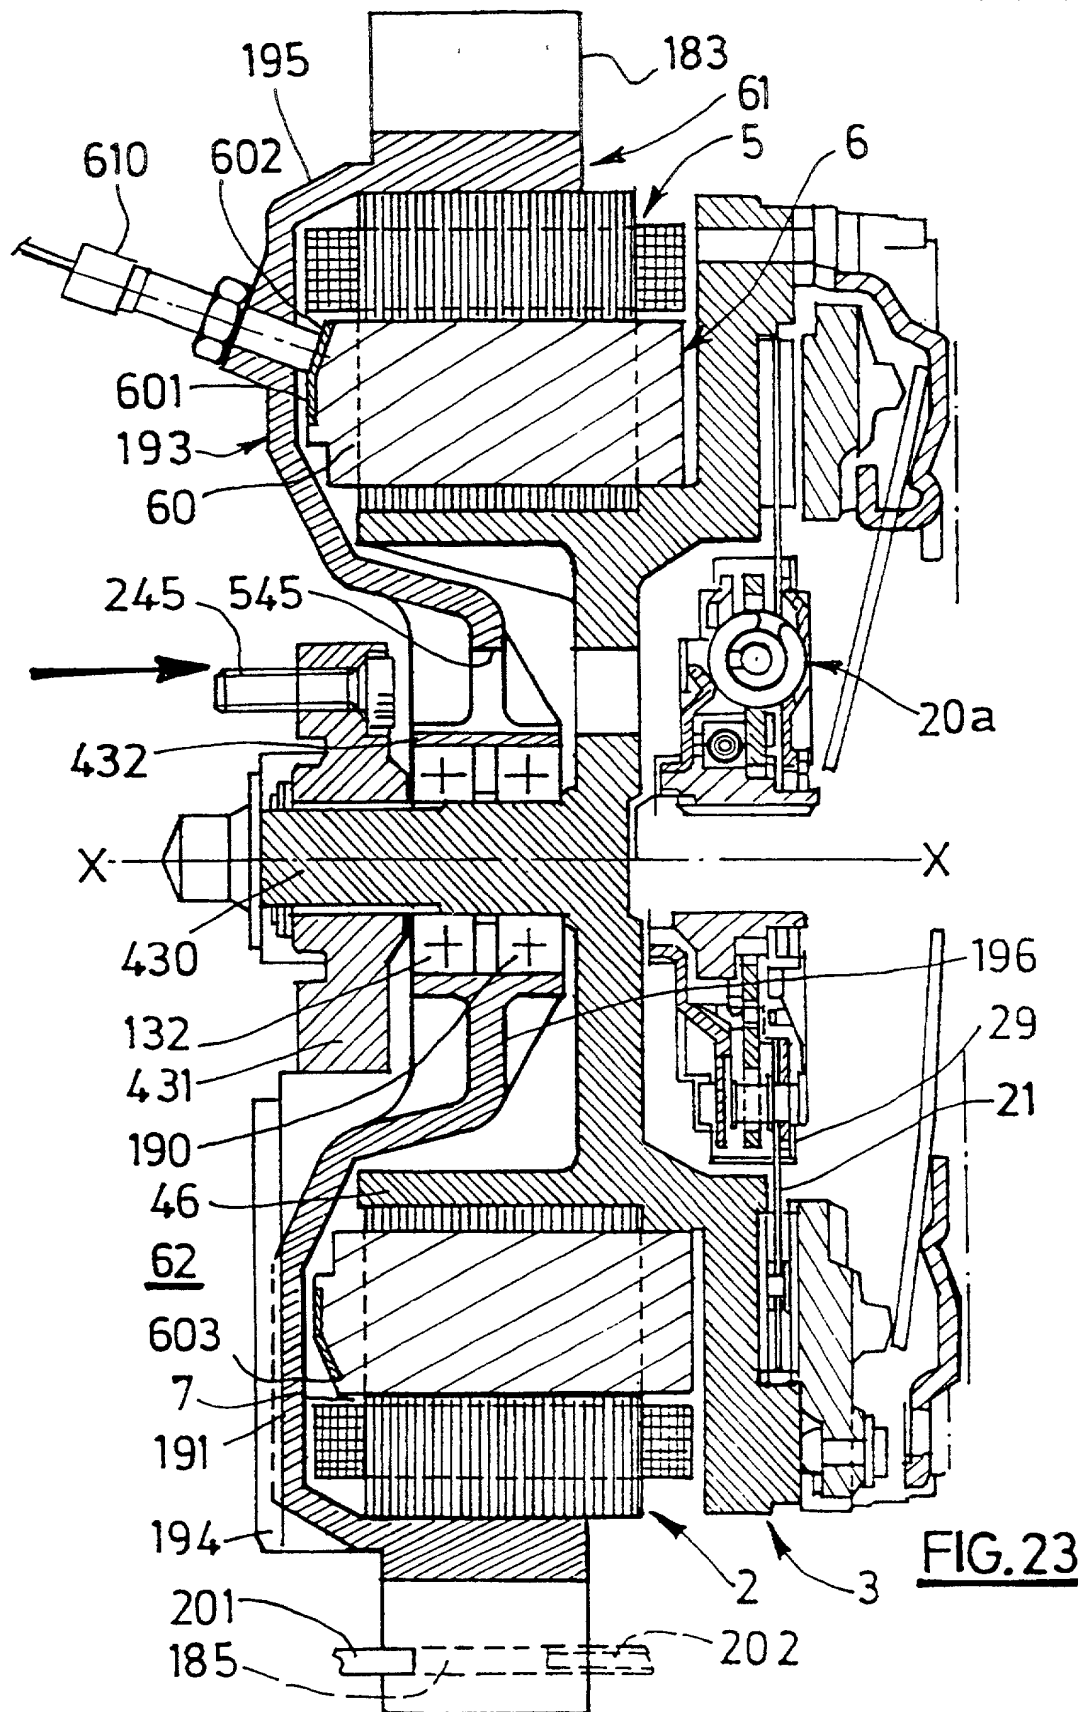

21/33

09/744733

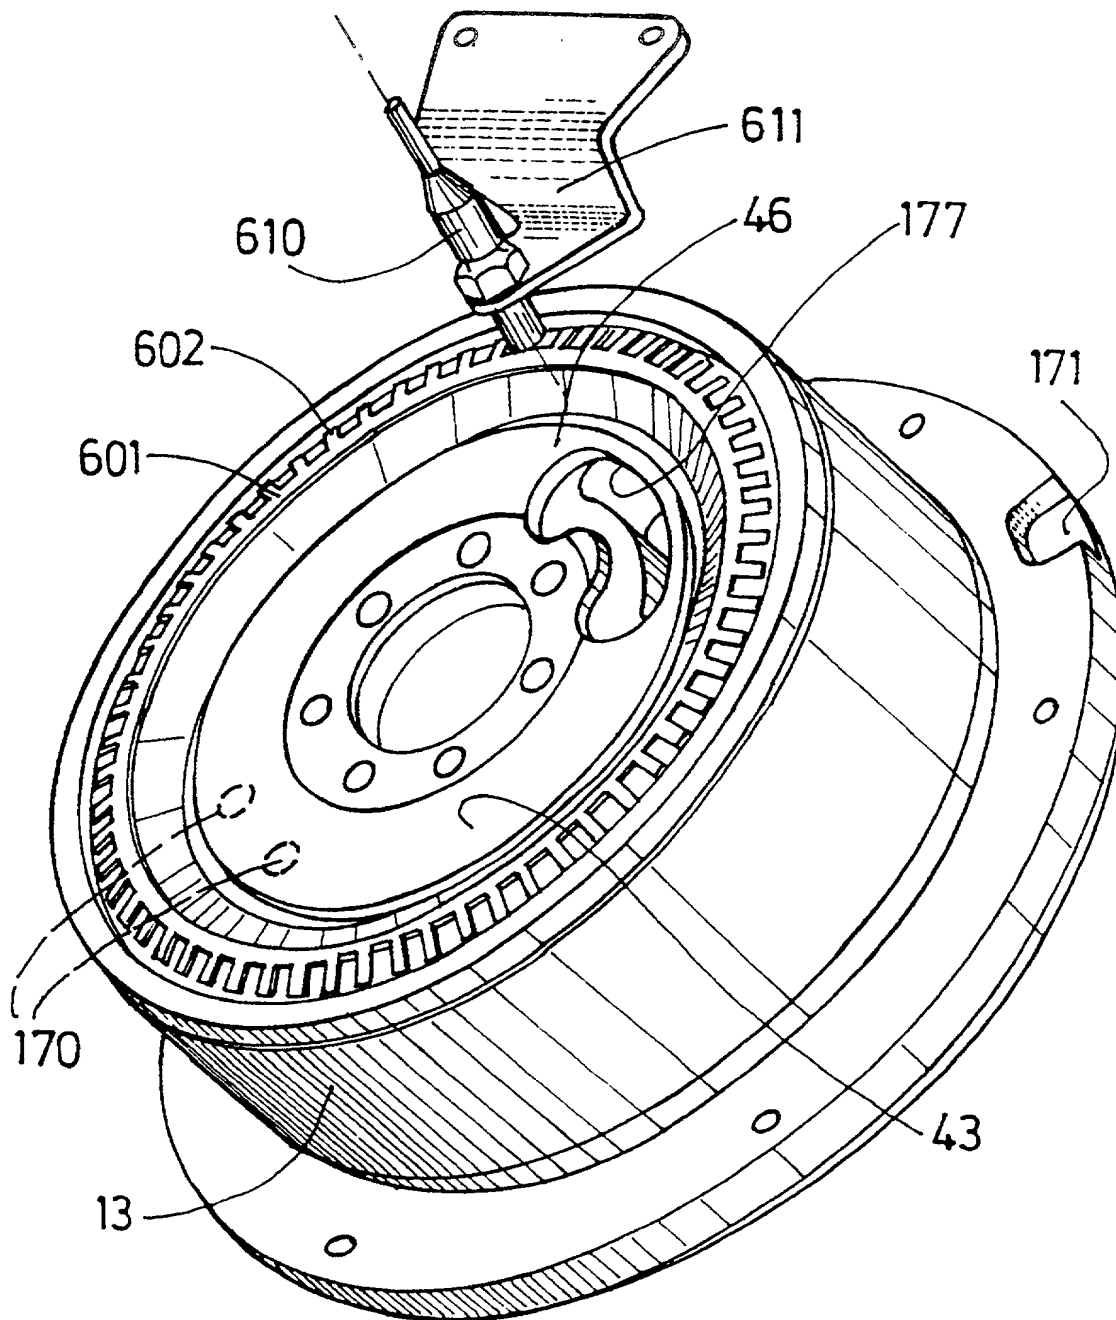FIG.24

22/33

09/744733


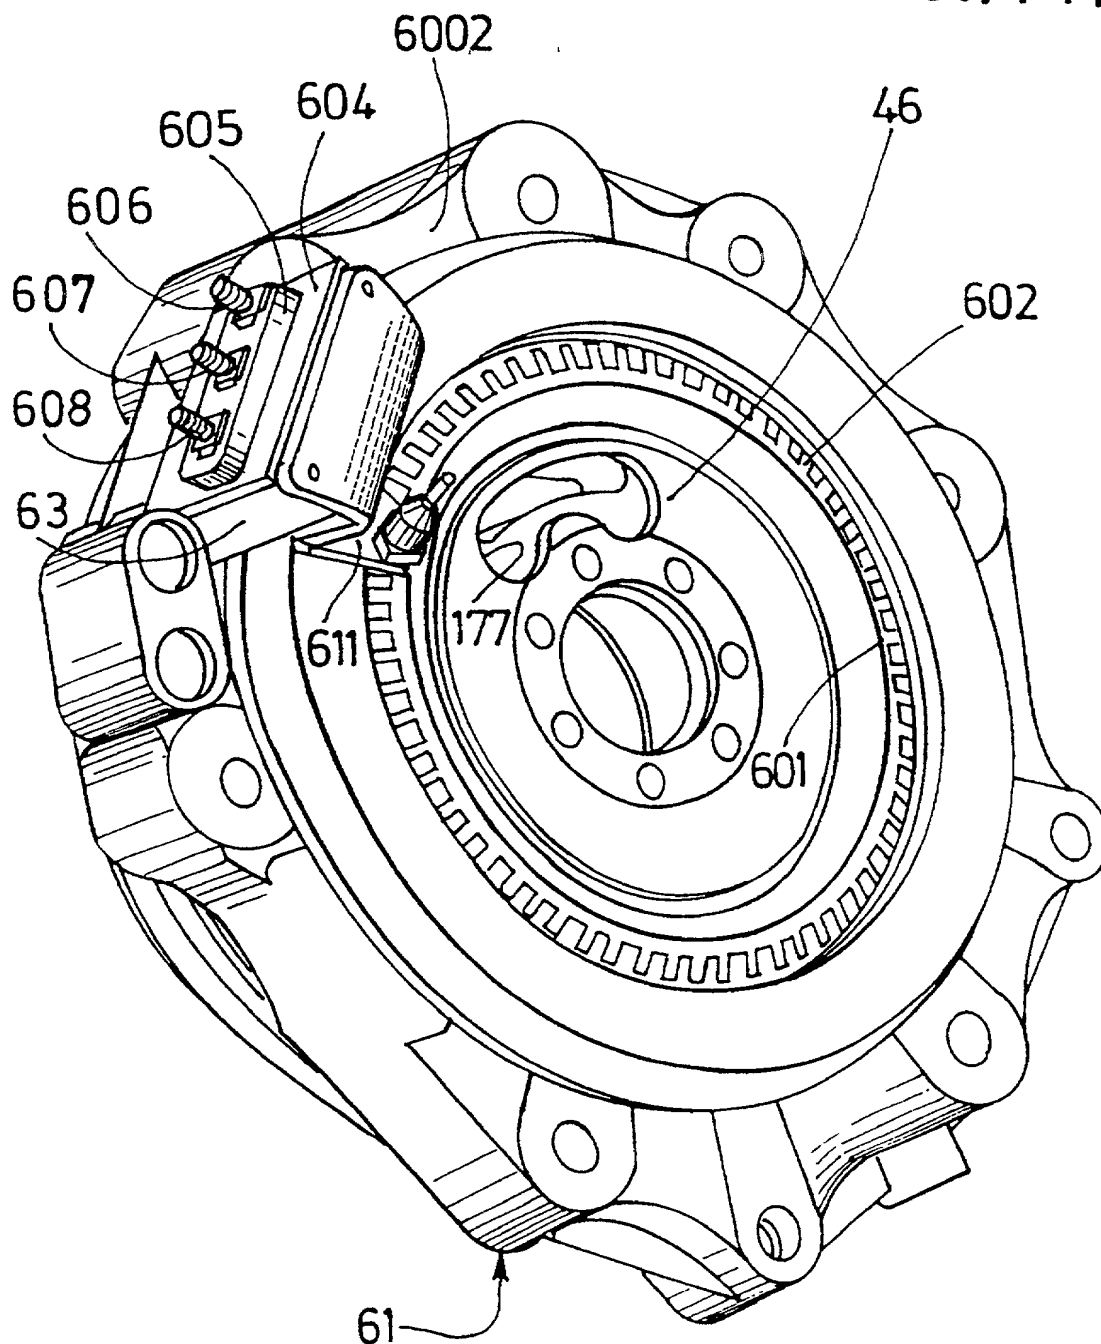


FIG.25


23/33

09/744733

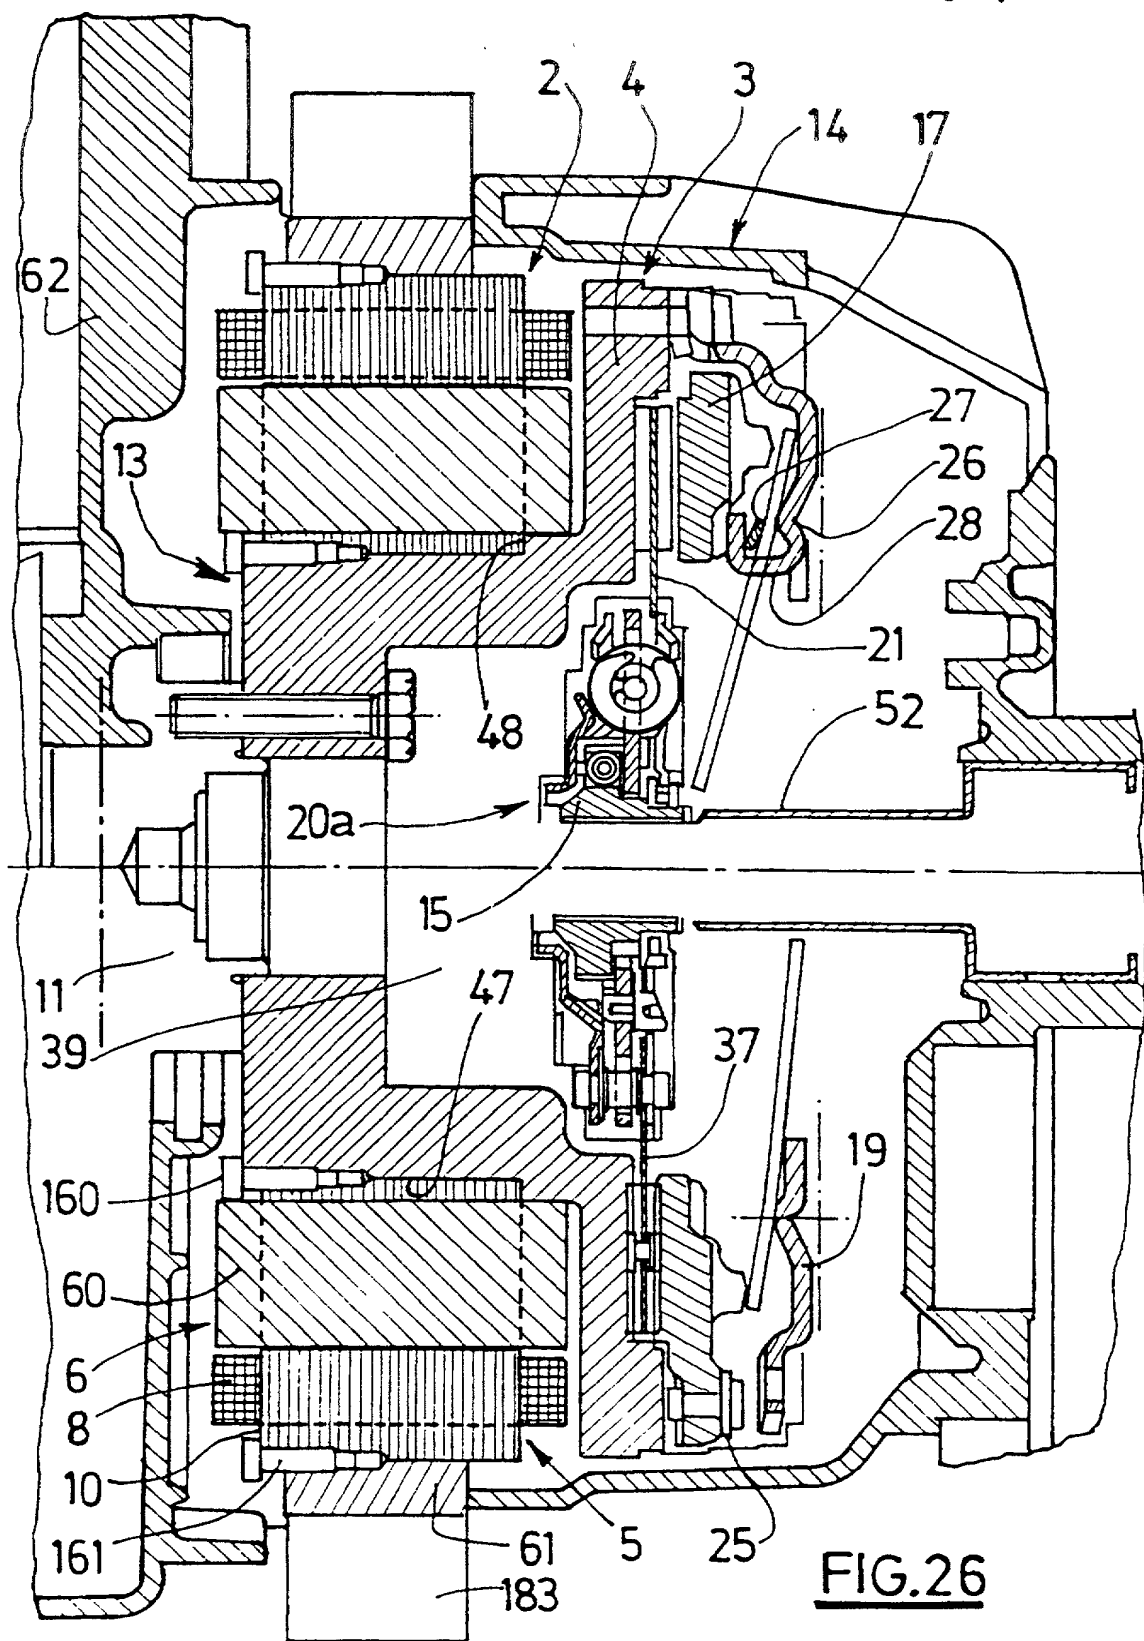


24/33


09/744733

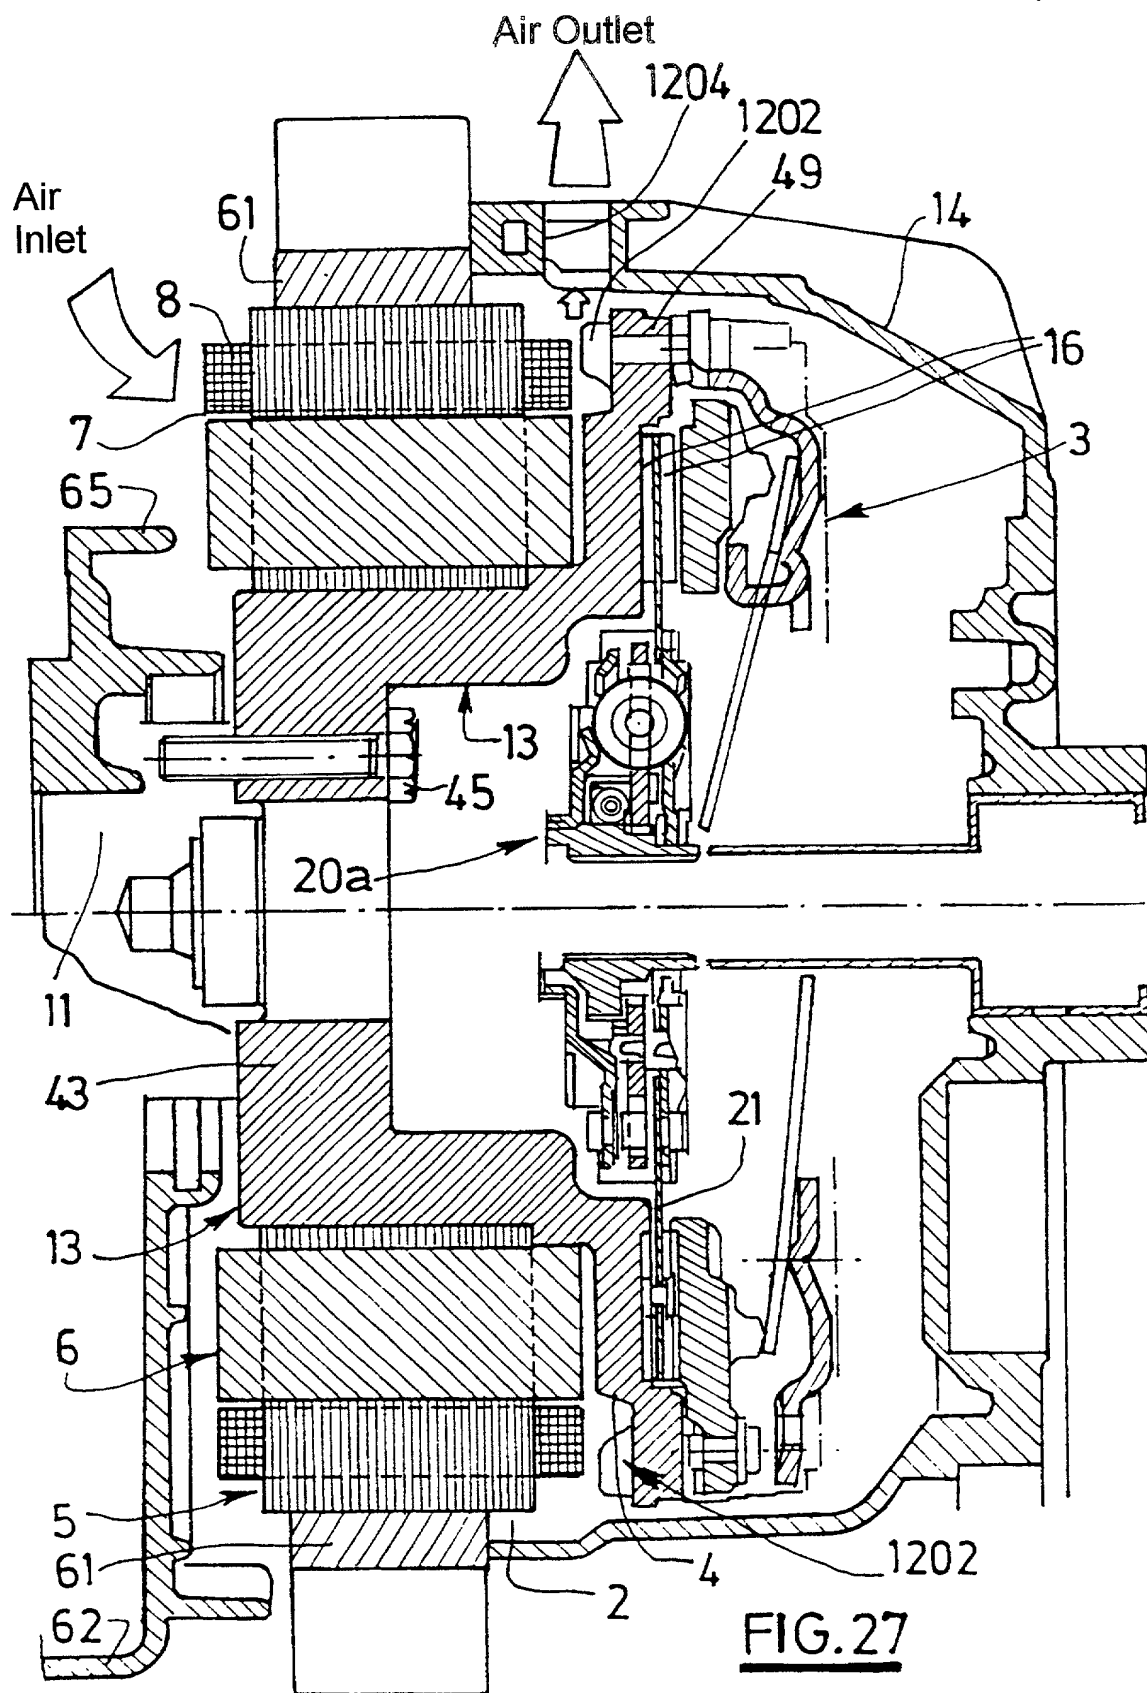

25/33

09/744733

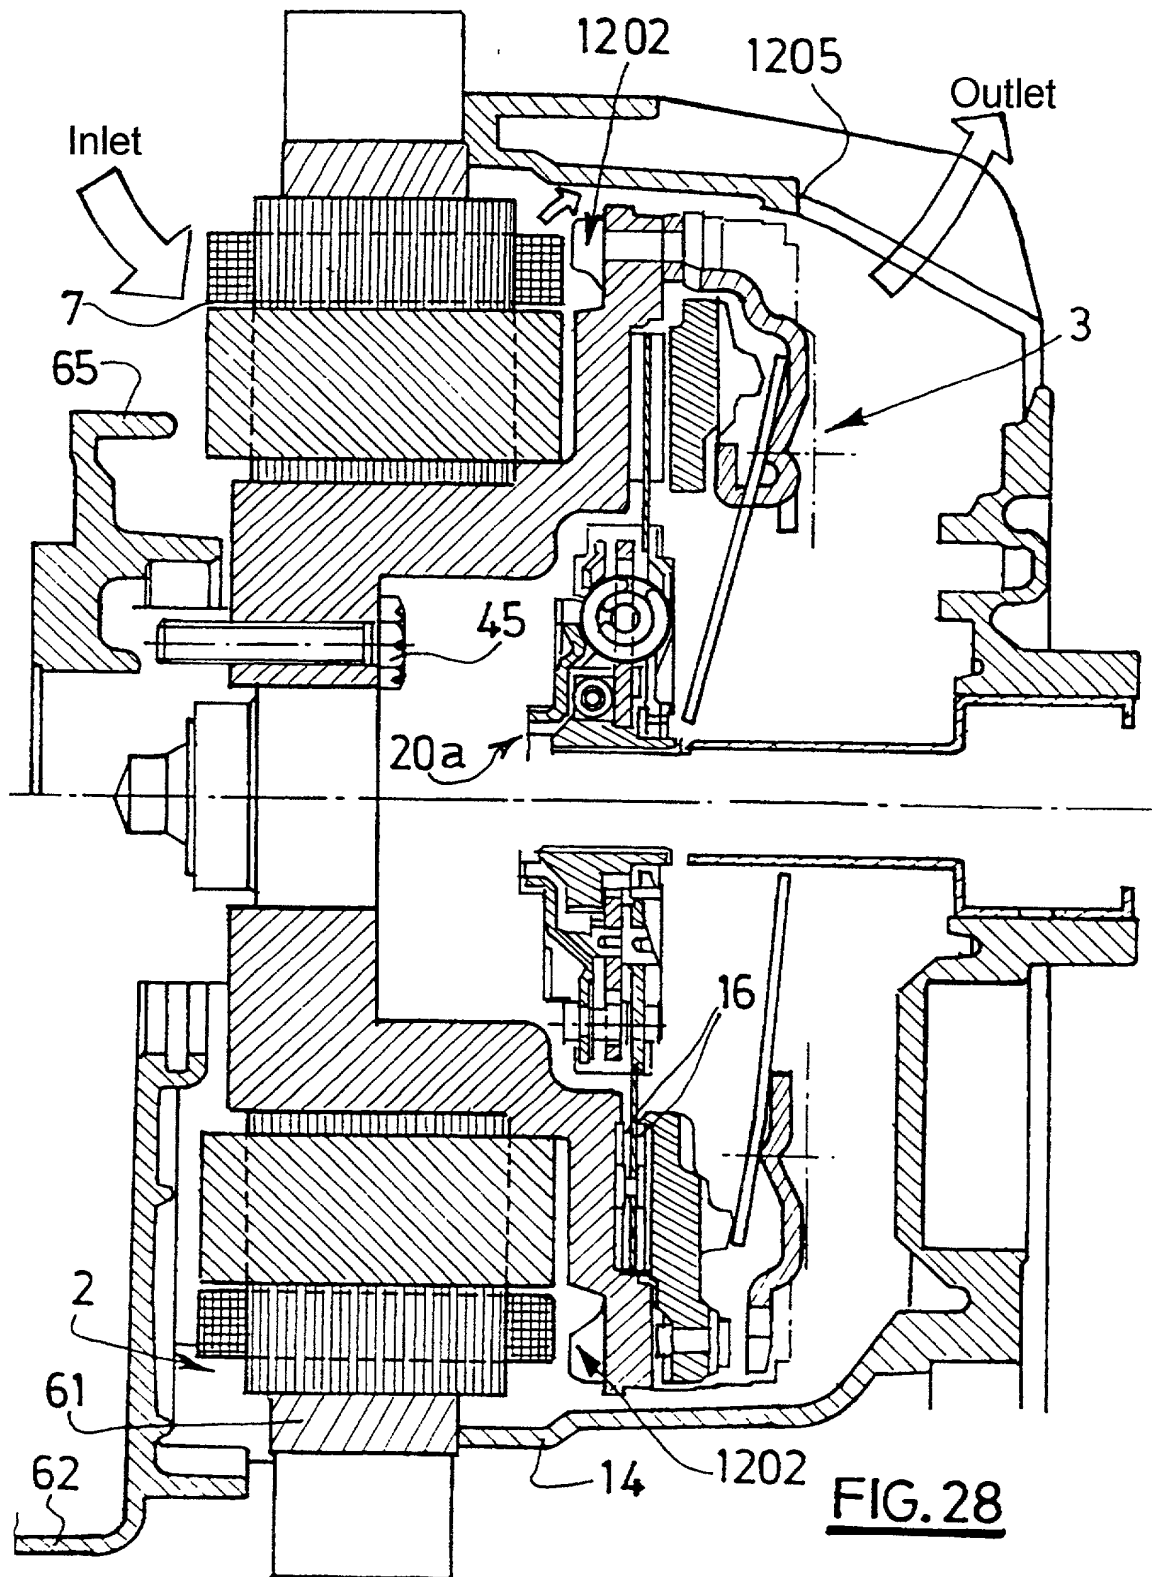

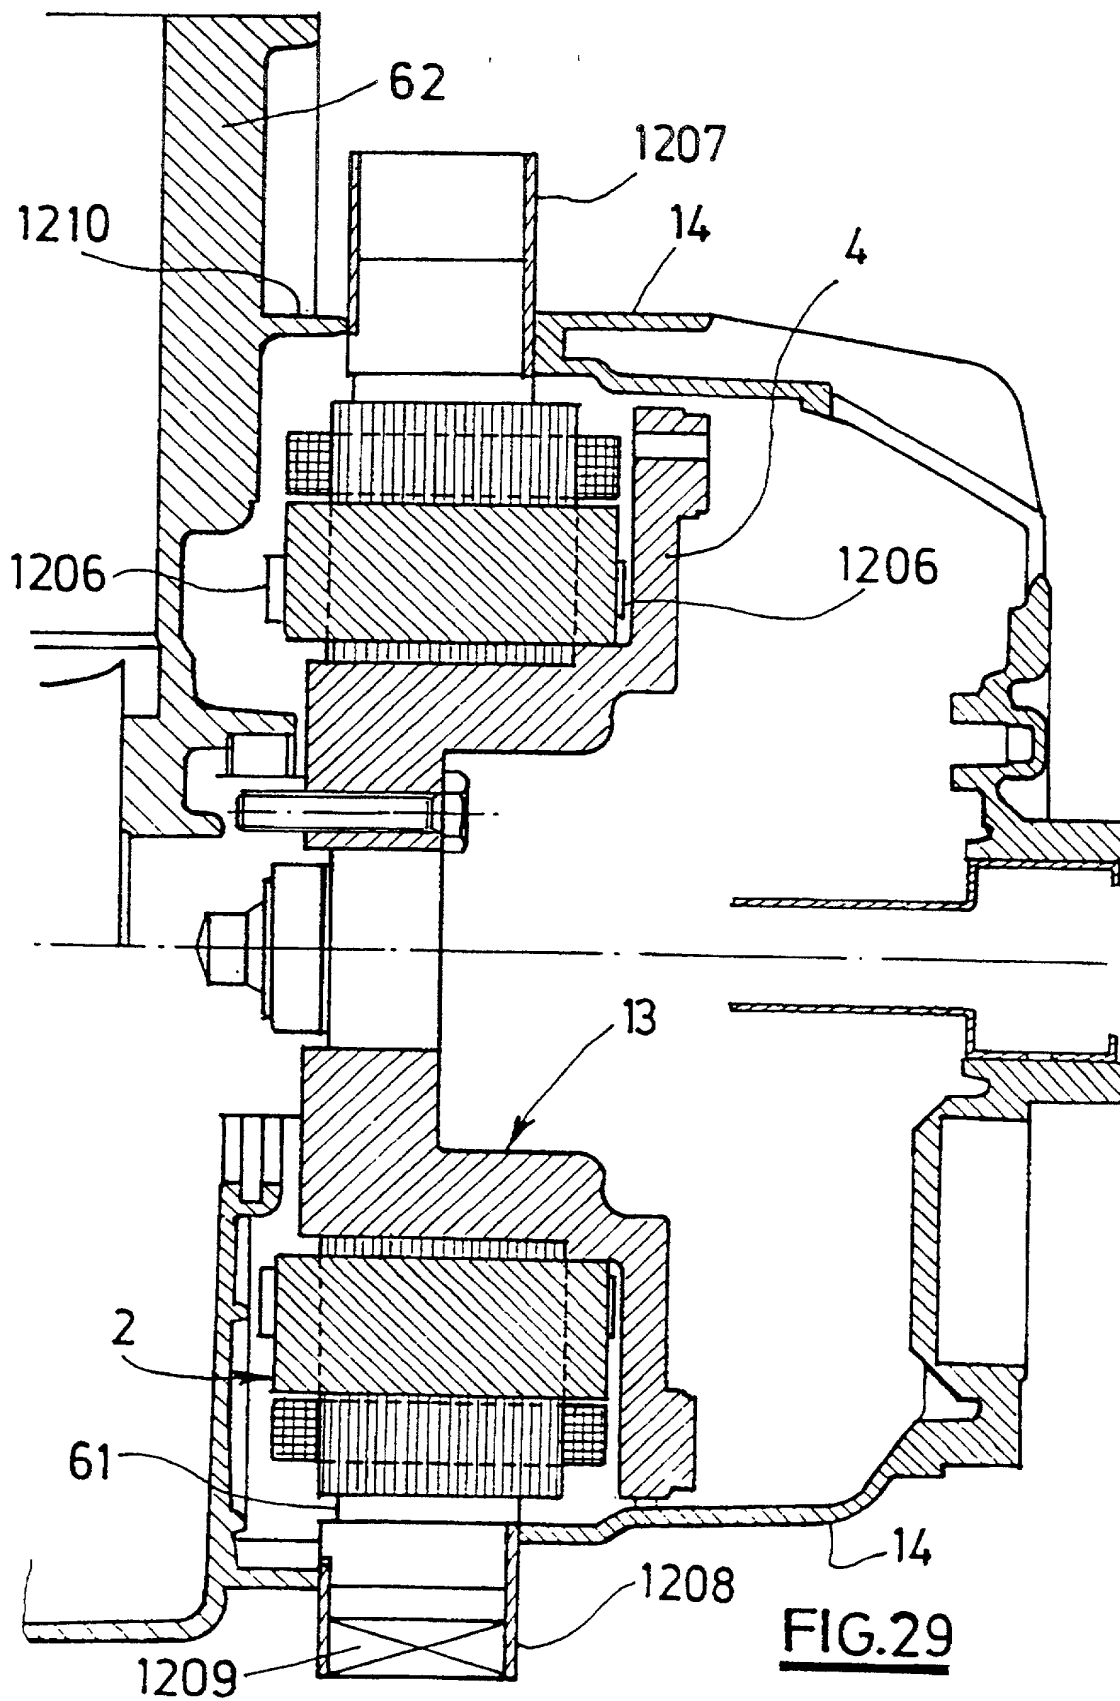

27/33

09/744733

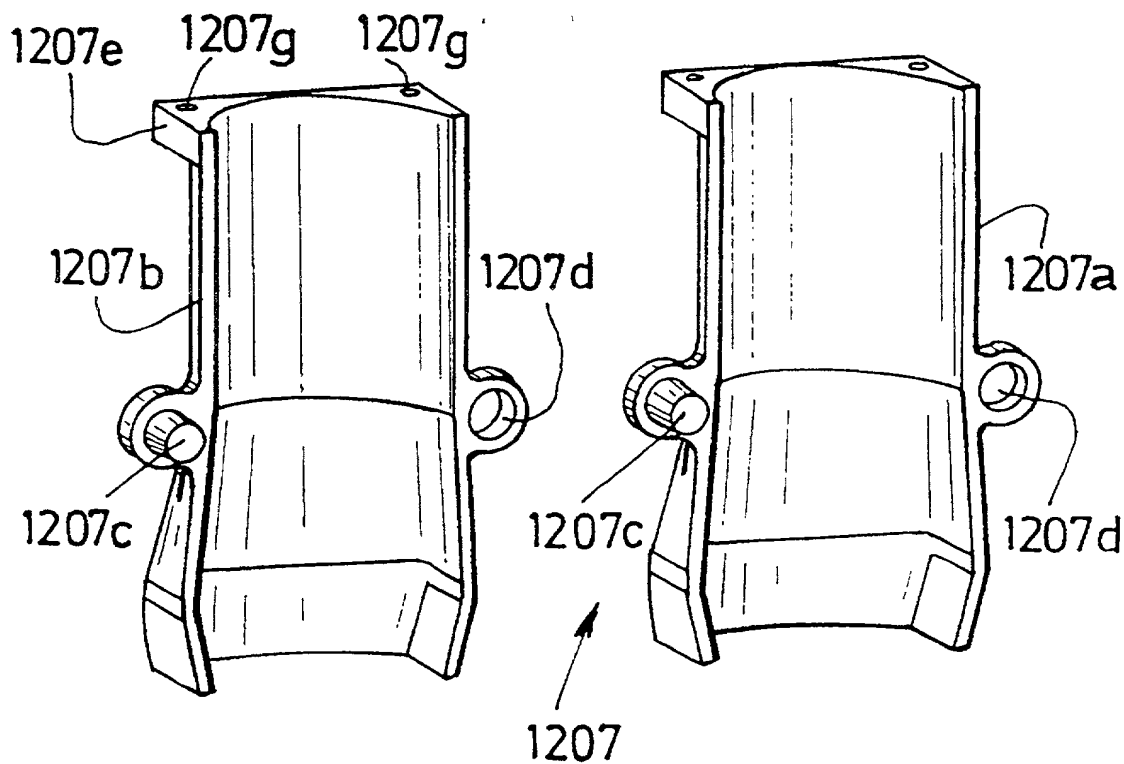


FIG. 30

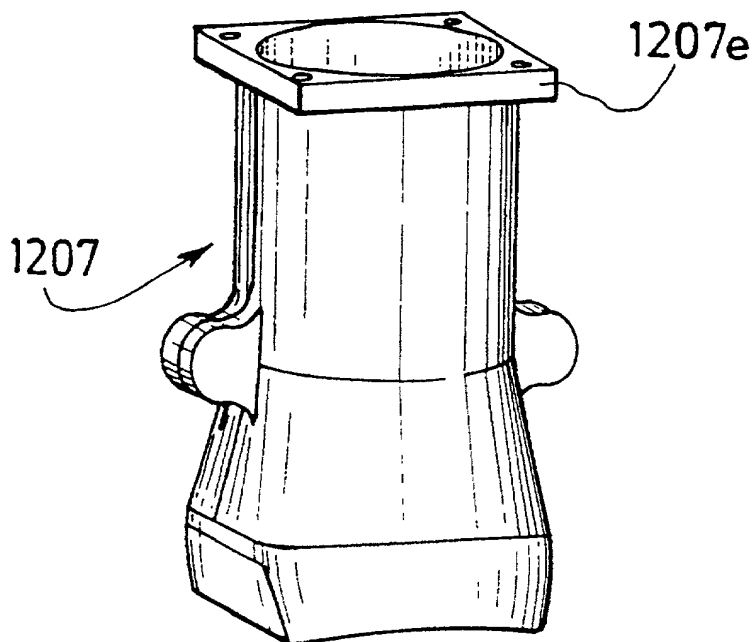


FIG. 31

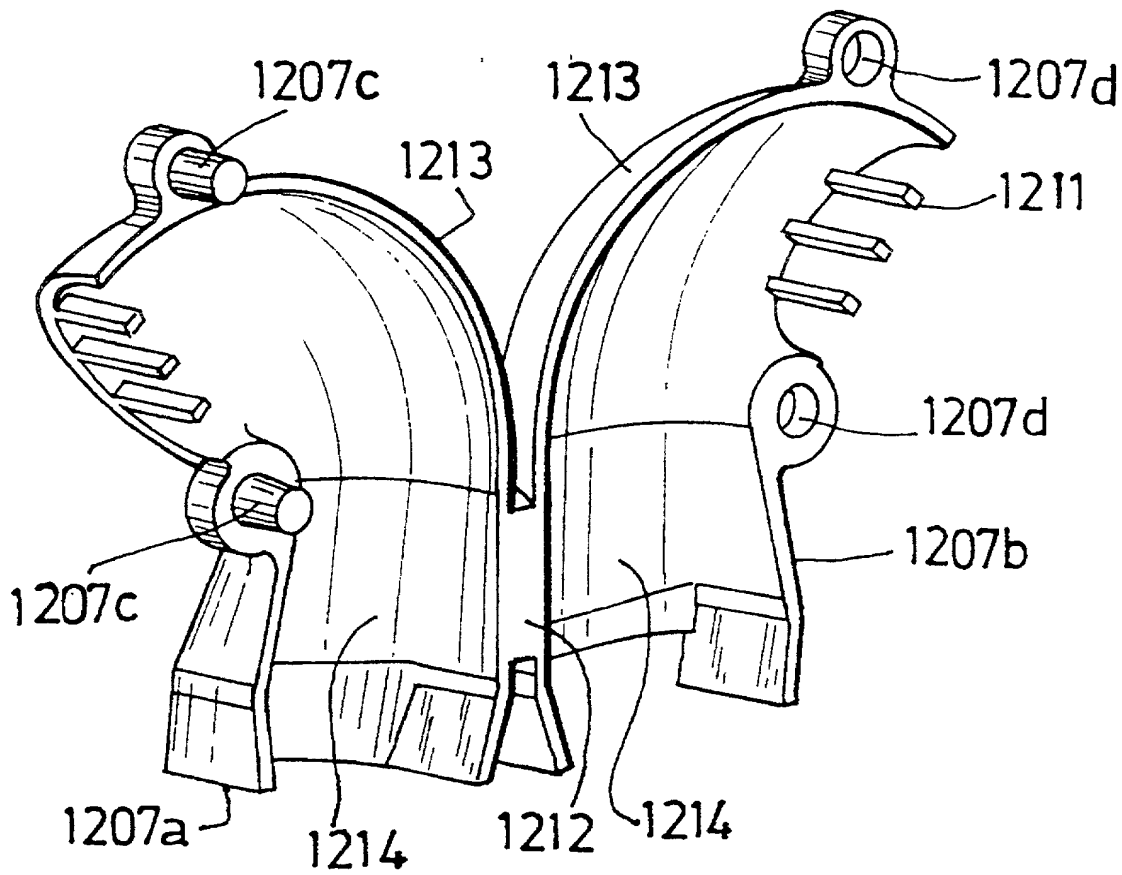


FIG.32

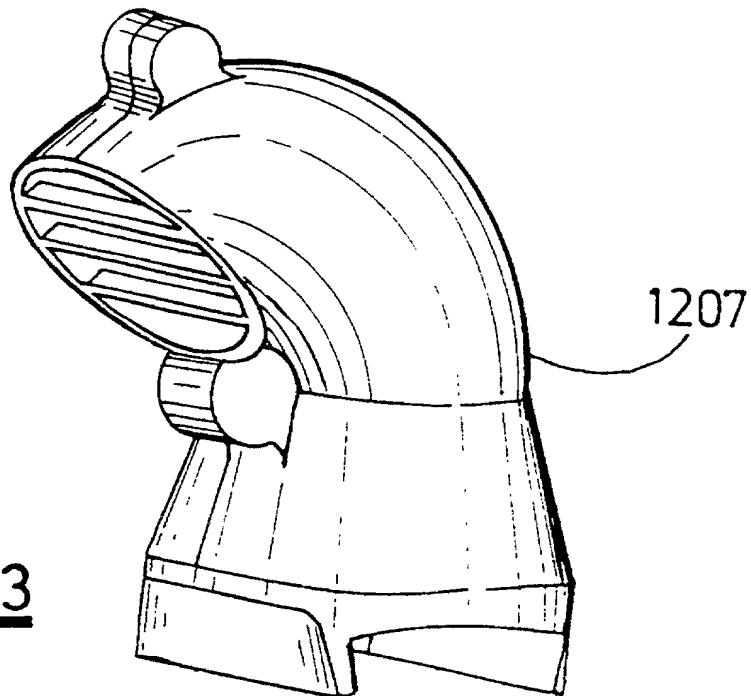


FIG.33

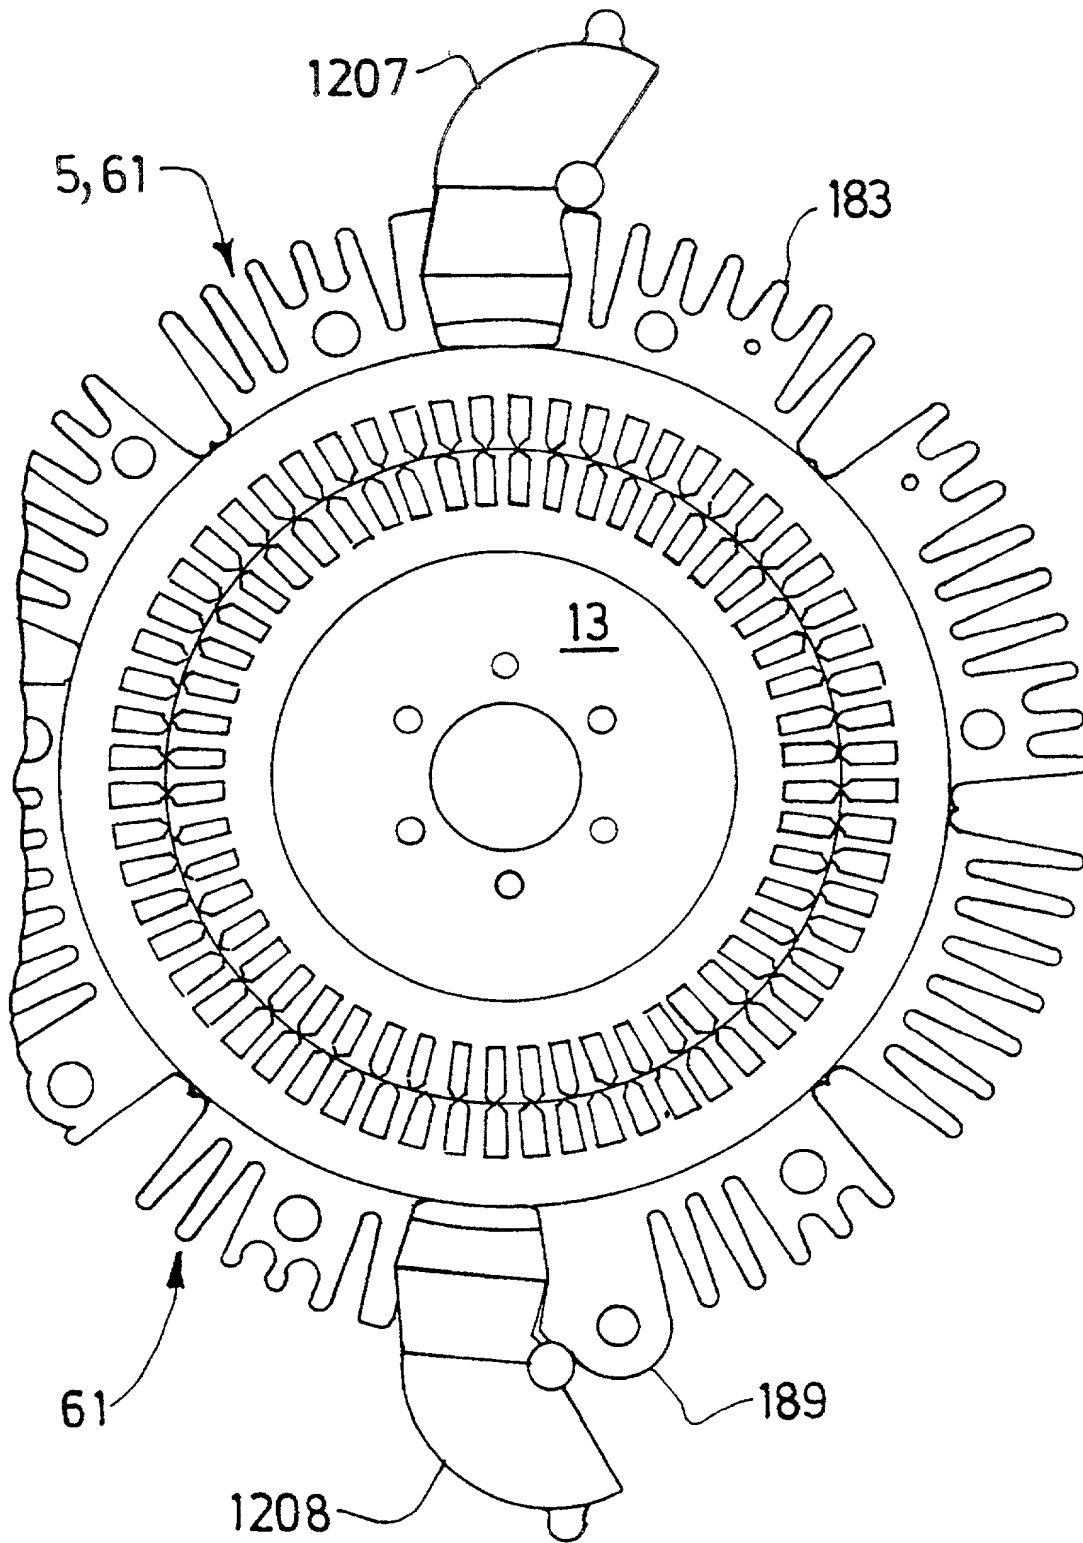
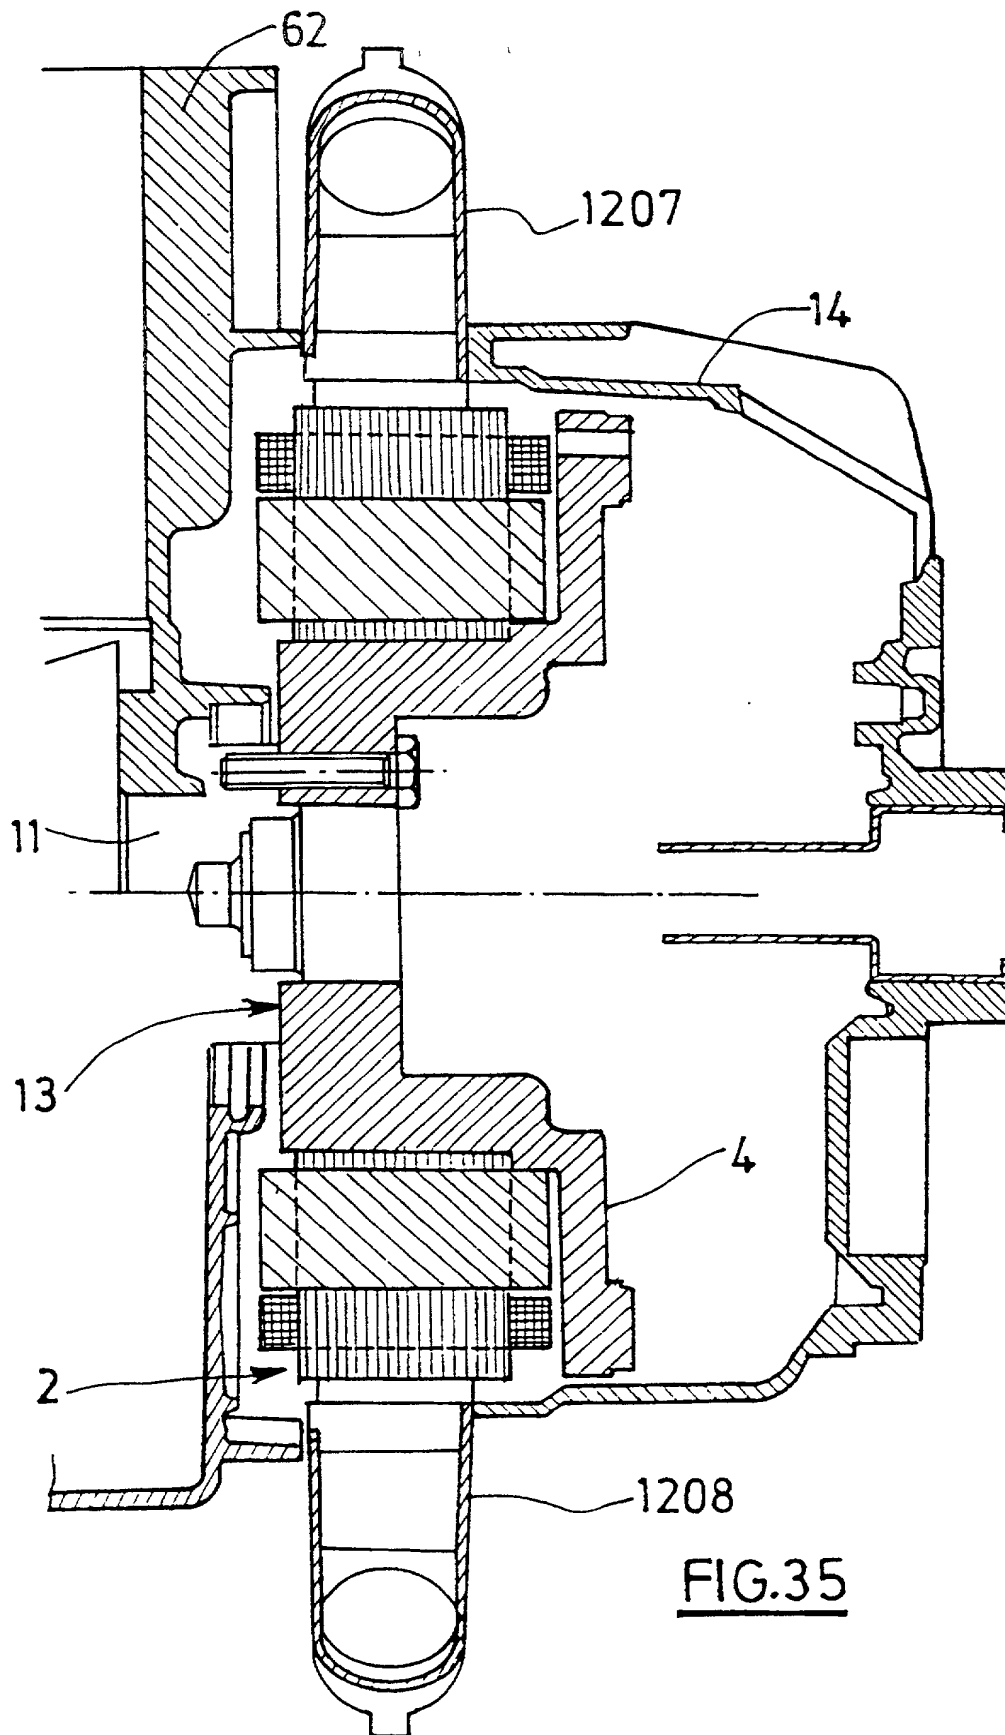
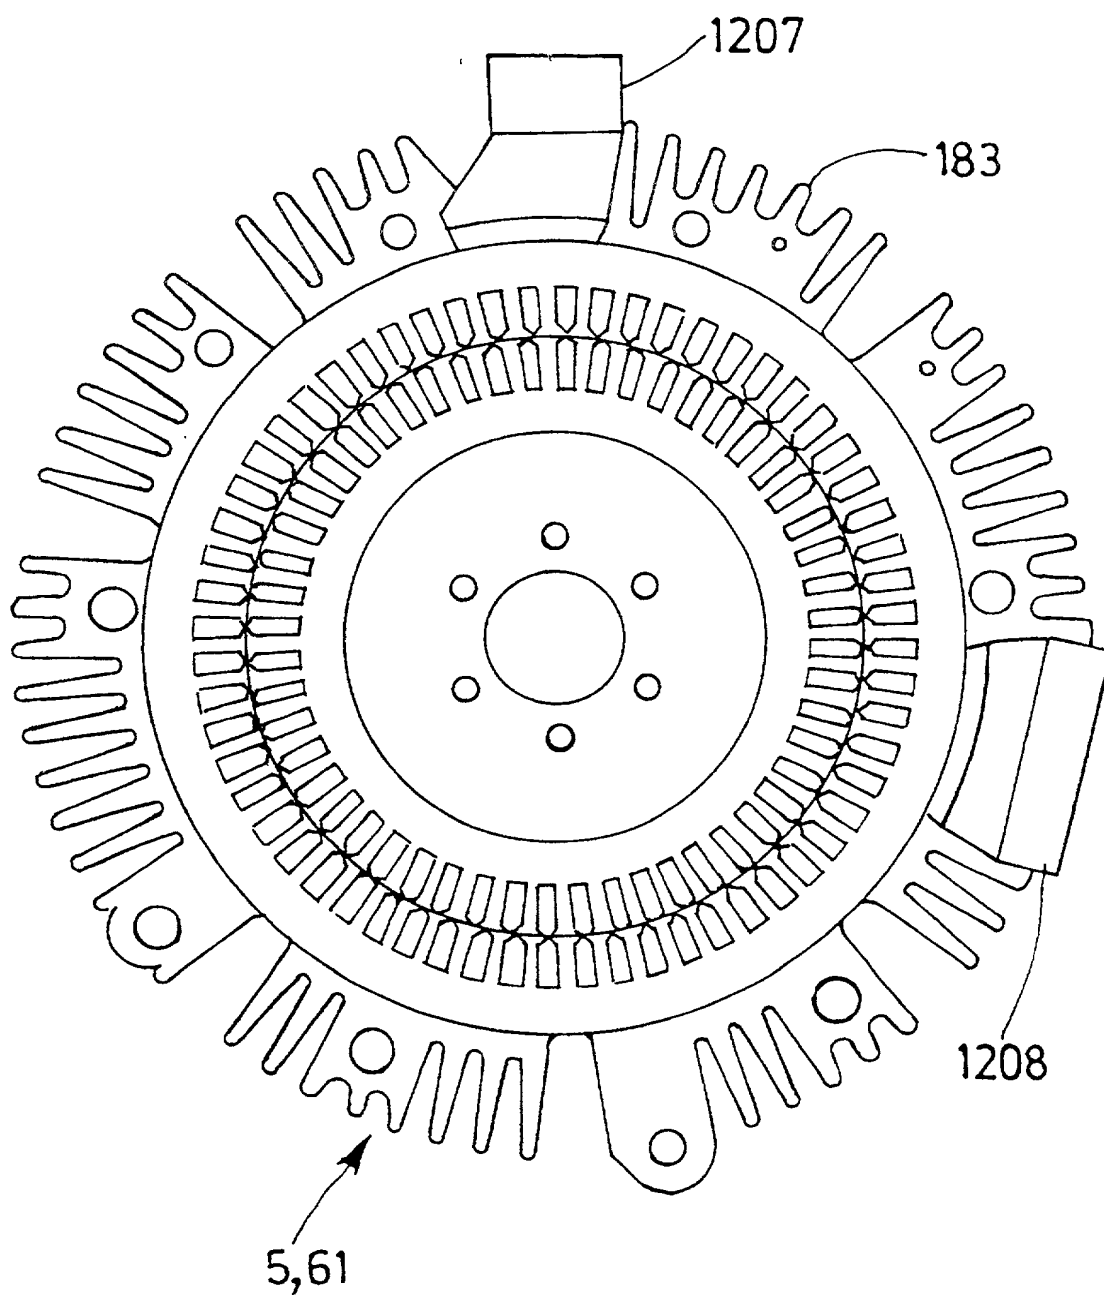



FIG. 34


FIG.35

31/33

09/744733

FIG. 36

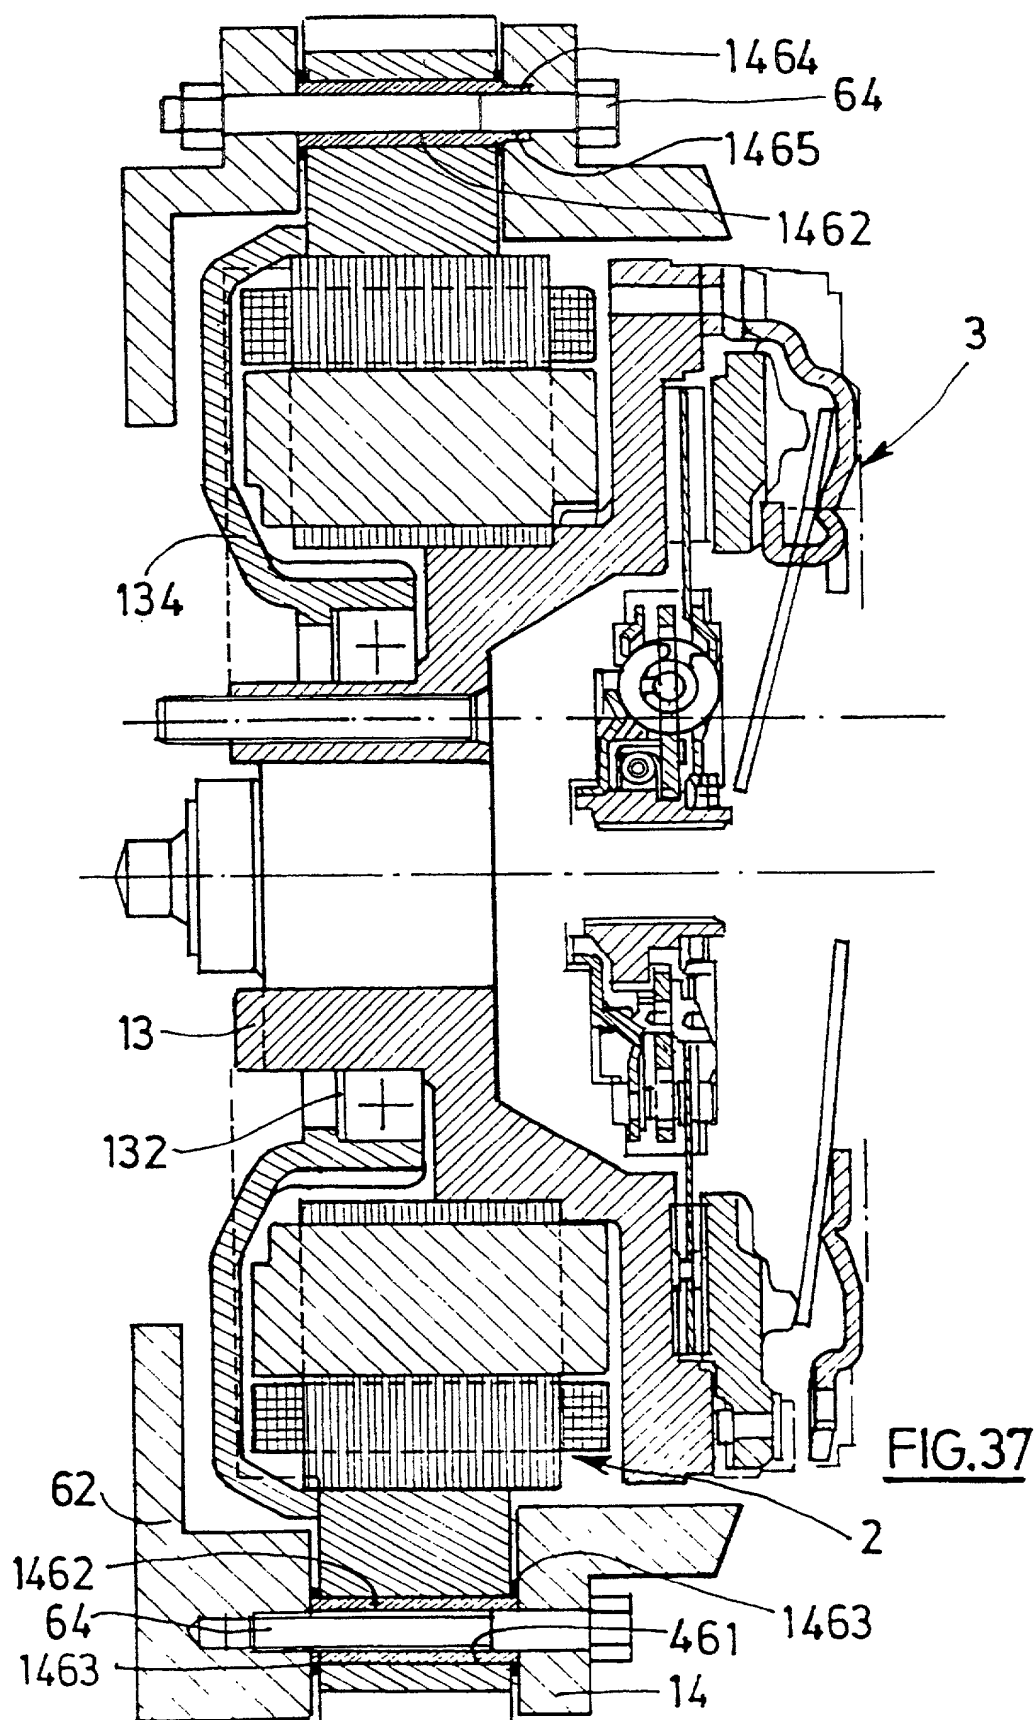

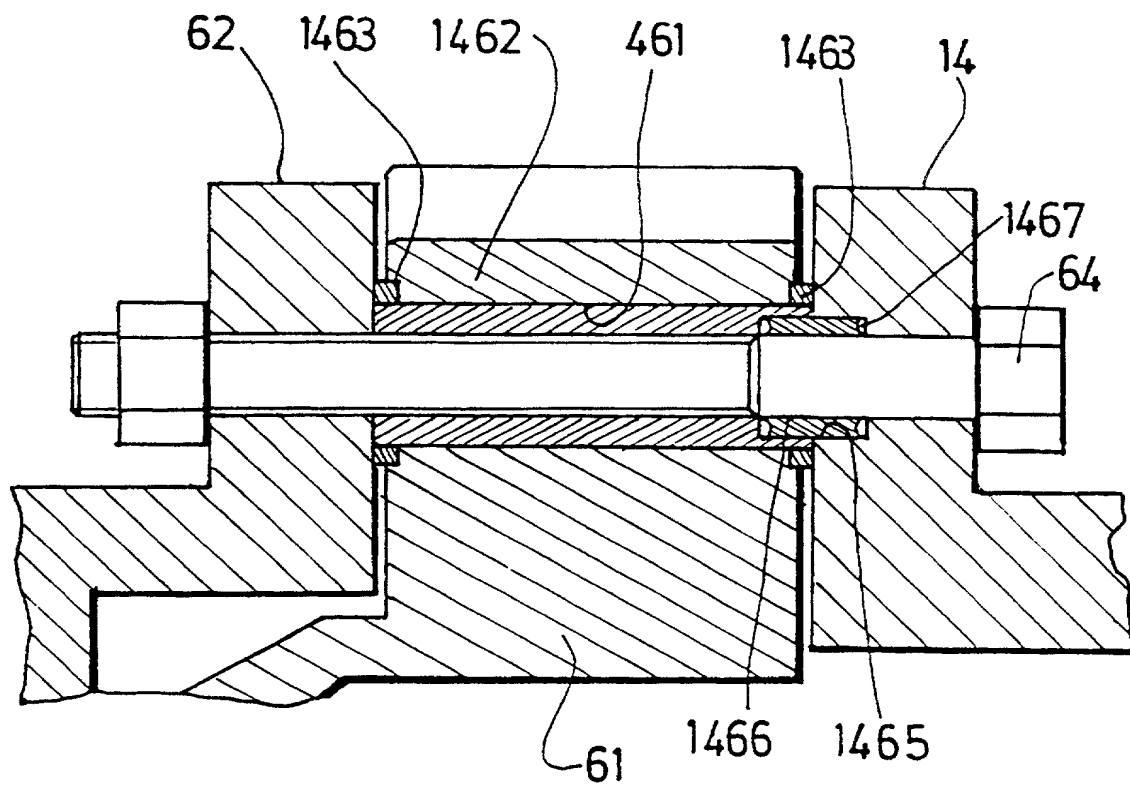FIG. 38

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name, and I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **Friction clutch bearing an electric machine rotor, in particular for a motor vehicle.** the specification of which (CHECK applicable BOX(ES)).

☐ was filed on _____ as U.S. Application Serial Number _____

☐ was filed as PCT international Application Number PCT/_____/_____ on _____

and (if applicable to U.S. or PCT Application) was amended on _____

PRIOR FOREIGN APPLICATION(S)			Priority Claimed
<u>Number</u>	<u>Country</u>	<u>Day/Month/Year Filed</u>	<u>Yes - No</u>
98 09639	FRANCE	28/JUILLET/1998	XX
98 11174	FRANCE	03/SEPTEMBRE/1998	XX
99 05287	FRANCE	16/AVRIL/1999	XX

PRIORITY U.S. OR PCT APPLICATION(S)		Status : Patented, Pending, Abandoned
<u>Application Serial No.</u>	<u>Day/Month/Year filed</u>	
PCT/FR99/01863	28/JUILLET/1999	

Jerome G. Lee (Reg. N° 16,967)
Joseph A. Calvaruso (Reg. N° 28,287)
Morgan & Finnegan
345 Park Avenue, NEW YORK, N.Y. 10154
~~(to whom all communications are to be directed)~~

1-001) Inventor's Signature David Huart
Inventor's Name (typed) David HUART
First Middle Initial Family Name
Residence (City) PARIS
Post Office Address (Include zip code) 107 rue de Reuilly

Date 08/03/99
Citizenship French FTX

State/Foreign country
75012 PARIS – FRANCE

Post Office Address (Include zip code) 107 rue de Roubaix
2-30 Inventor's Signature Michel Graton
Inventor's Name (typed) Michel GRATON
First Middle Initial Family Name
Residence (City) PARIS
Post Office Address (Include zip code) 7 Boulevard Mortier

Date 08/31/99
Citizenship French
State of FRX

3-60 3) Inventor's Signature *Cédric Plasse*
 Inventor's Name (typed) Cédric PLASSE
 First Middle Initial Family Name
 Residence (City) GARCHES
 Post Office Address (Include zip code) **8 Allée de la Pelletière**

Date 09/03/99
Citizenship French

400 4) Inventor's Signature *Roger Abadia*
Inventor's Name (typed) Roger ABADIA
First Middle Initial Family Name
Residence (City) NEULLY-PLAISANCE
Post Office Address (Include zip code) 39 Avenue du Nord

State/Foreign country **FRX**
92380 GARCHES - FRANCE
 Date **09/03/99**
 Citizenship **French**

State/Foreign country **FRX**
93360 NEULLY-PLAISANCE - FRANCE

RULE 63 (37 C.F.R. 1.63)
DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION
IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Page 2

PRIOR FOREIGN APPLICATION(S)

Number	Country	Day/Month/Year Filed	Priority Claimed Yes - No
98 09639	FRANCE	28/JUILLET/1998	XX
98 11174	FRANCE	03/SEPTEMBRE/1998	XX
99 05287	FRANCE	16/AVRIL/1999	XX

5-00
5) Inventor's Signature *Fabrice TAUVRON*
Inventor's Name (typed) Fabrice TAUVRON
First Middle Initial Family Name

Date *08/31/1999*
Citizenship **French**

Residence (City) ATHIS-MONS
Post Office Address (Include zip code) 9 rue Emile Lécivain

State/Foreign country *FRX*
91200 ATHIS-MONS - FRANCE

6-00
6) Inventor's Signature *Pierre FAVEROLLE*
Inventor's Name (typed) Pierre FAVEROLLE
First Middle Initial Family Name

Date *08/12/1999*
Citizenship **French**

Residence (City) PARIS
Post Office Address (Include zip code) 15 rue du Clos

State/Foreign country *FRX*
75020 PARIS - FRANCE

7-00
7) Inventor's Signature *Dokou, Antoine AKEMAKOU*
Inventor's Name (typed) Dokou, Antoine AKEMAKOU
First Middle Initial Family Name

Date *08/12/1999*
Citizenship **Togo**

Residence (City) VITRY SUR SEINE
Post Office Address (Include zip code) 99 rue Charles Infroit

State/Foreign country *FRX*
94400 VITRY SUR SEINE - FRANCE

8-00
8) Inventor's Signature *Gilles LEBAS*
Inventor's Name (typed) Gilles LEBAS
First Middle Initial Family Name

Date *09/01/1999*
Citizenship **French**

Residence (City) ASNIÈRES
Post Office Address (Include zip code) 9 Allée des Erables

State/Foreign country *FRX*
92600 ASNIÈRES - FRANCE

9) Inventor's Signature
Inventor's Name (typed)
First Middle Initial Family Name

Date
Citizenship

Residence (City)
Post Office Address (Include zip code)

State/Foreign country